
THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

de HAVILLAND

CAGE CODE 71867 CS STANDARD THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

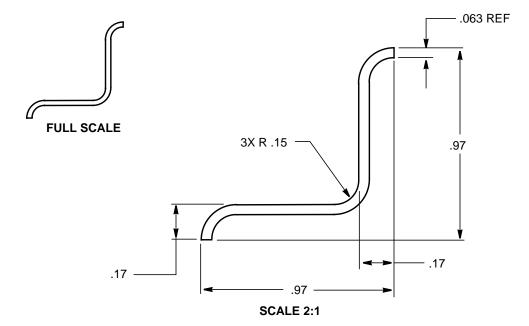

MATERIAL: 063 - 6061-T4

FINAL HT TEMPER T6 (NOTE 1)

SPECIFICATION: QQ-A-250/11

C1 + F19FINISH:

NOTES:

- 1. MATERIAL MUST BE FORMED IN T4 TEMPER AND THEN AGE HARDENED TO T6 CONDITION
- 2. MINIMUM LENGTH 12 FEET
- 3. TOLERANCES ON ALL DIMENSIONS \pm .030

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	B. McDONALD		~~	10 (. 2 A
CHECKED	J. ROTSCH	ZED SECTION, DADO RAIL	CS	436	VED
STRESSED	P. IAKOVLEV		011555		- S
APPROVED	S. HAMID		SHEET:	1	APF

REV:

REV:

PR 1998