

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**

**CAGE CODE 71867  
CSP STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

**LIST OF CURRENT SHEETS**

SHEET		1	1A	1B	2	2A	3	4	5	6	7	8	9	10	11
REV		F	C	D	C	-	C	D	C	C	C	C	C	C	C
SHEET	12	13	14	14A	15	16	16A	17	18	19	20	21	22	23	24
REV	C	C	D	-	C	C	-	B	B	B	C	B	B	C	C
SHEET	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39
REV	C	B	B	C	B	D	C	C	C	C	C	C	D	D	C
SHEET	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54
REV	C	B	C	B	C	B	B	C	A	C	B	B	A	B	B
SHEET	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69
REV	B	B	B	A	B	B	B	B	B	B	B	B	B	A	B
SHEET	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84
REV	A	C	B	B	B	B	A	-	-	-	A	B	C	A	A
SHEET	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99
REV	A	A	A	B	A	A	A	A	A	A	A	A	B	A	A
SHEET	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114
REV	A	A	B	A	A	A	A	A	A	A	A	A	A	A	A
SHEET	115	116	117												
REV	A	A	A												
SHEET															
REV															

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 1
APPROVED	S. HAMID		

Ⓡ REDRAWN

APPROVED: 18 JULY 58 REV: A - 20 NOV 58 REV: B - 15 APR 59 REV: C - 15 APR 59 REV: D - 27 JAN 61 REV: E - 24 MAY 95 REV: F - 30 JUN 98

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**

**CAGE CODE 71867  
CSP STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

**INDEX**

DASH NO.	SEE PAGE	DASH NO.	SEE PAGE	DASH NO.	SEE PAGE	DASH NO.	SEE PAGE	DASH NO.	SEE PAGE
1	2,14	65	N/A	129	31	193	49	257	73
3	2,14	67	N/A	131	32	195	50	259	74
5	2,14	69	N/A	133	33	197	51	261	75
7	2,14	71	15	135	34	199	52	263	76
9	2,14	73	16	137	35	201	53	265	N/A
11	N/A	75	16	139	36,48	203	54	267	N/A
13	N/A	77	17	141	37	205	55	269	N/A
15	2,14	79	18	143	19	207	56	271	80
17	2,14	81	18	145	38	209	57	273	81
19	2,14	83	18	147	39	211	58	274	82
21	3	85	19	149	40	213	58	275	83
23	3	87	19	151	41	215	58	276	N/A
25	3	89	19	153	41	217	58	277	84
27	3	91	20	155	41	219	59	278	N/A
29	4	93	21	157	41	221	60	279	85
31	4	95	21,29,45	159	42	223	61	280	N/A
33	4	97	21	161	42	225	62	281	86
35	4	99	21	163	42	227	63	282	N/A
37	5	101	22	165	42	229	64	283	87
39	6	103	22	167	43	231	65	284	N/A
41	7	105	22	169	43	233	66	285	88
43	8	107	22	171	43	235	67	286	N/A
45	9	109	23	173	43	237	68	287	89
47	10	111	24	175	44	239	68	288	N/A
49	11	113	25	177	45	241	68	289	90
51	12	115	26	179	45	243	69	290	N/A
53	13	117	27	181	45	245	70	291	91
55	N/A	119	28	183	46	247	70	292	92
57	N/A	121	29	185	47	249	70	293	93
59	N/A	123	29	187	48	251	70	294	94
61	N/A	125	29	189	48	253	71	295	95
63	N/A	127	30	191	48	255	72	296	96

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: <b>1A</b>
APPROVED	S. HAMID		

© REDRAWN

REV:

REV:

REV:

REV:

REV: C - 30 JUN 98

REV: B - 31 AUG 95

APPROVED: 24 MAY 95

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**

**CAGE CODE 71867  
CSP STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

**INDEX**

DASH NO.	SEE PAGE	DASH NO.	SEE PAGE	DASH NO.	SEE PAGE	DASH NO.	SEE PAGE	DASH NO.	SEE PAGE
297	97	315	115						
298	98	316	116						
299	99	317	117						
300	101								
301	100								
302	102								
303	103								
304	104								
305	105								
306	106								
307	107								
308	108								
309	109								
310	110								
311	111								
312	112								
313	113								
314	114								

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: <b>1B</b>
APPROVED	S. HAMID		

REDRAWN

REV:

REV:

REV:

REV: D - 30 JUN 98

REV: C - 18 MAR 96

REV: B - 31 AUG 95


APPROVED: 24 MAY 95

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**

**CAGE CODE 71867  
CSP STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

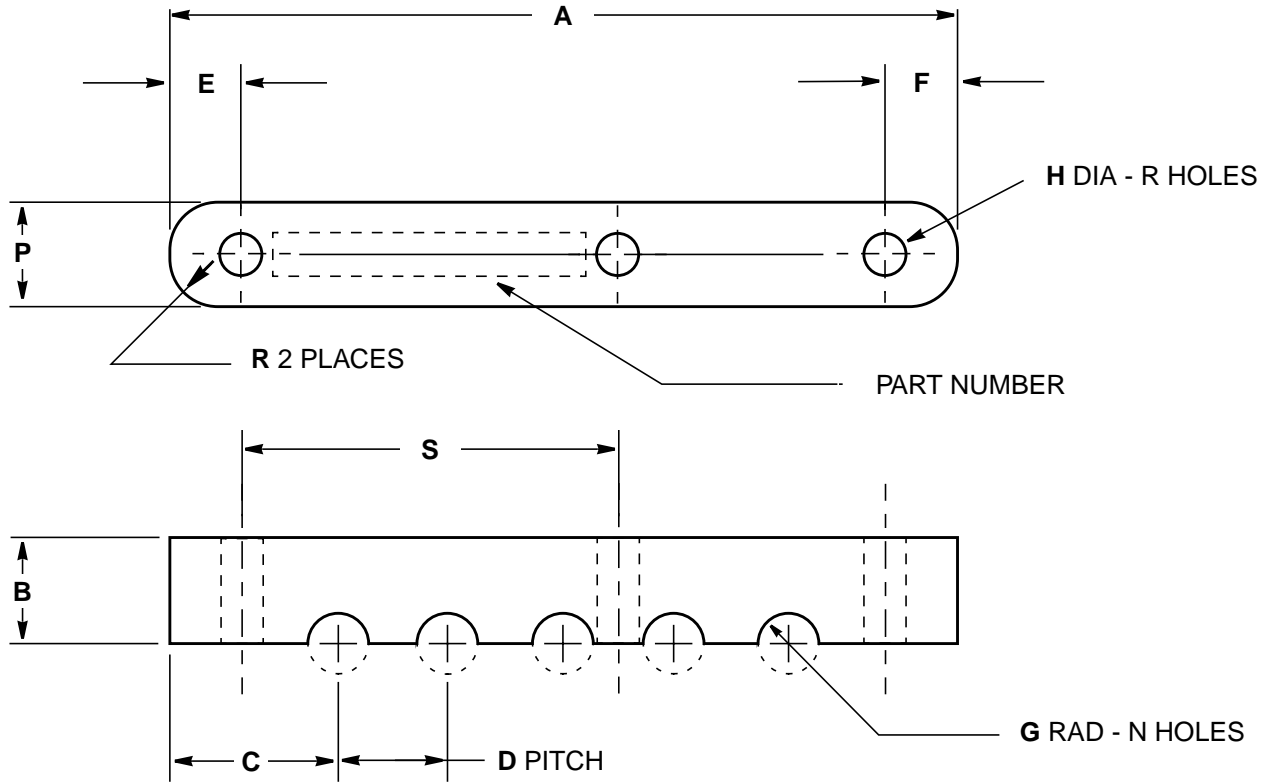

PART NO.	DIMENSIONS								RAD. G	DIA. H	NO. OF HOLES	
	A	B	C	D	E	F	P	S			N	R
-1	2.50	0.375	0.75	0.50	0.50	0.50	0.375	-	0.125	0.170	3	2
-3	3.00	0.375	0.50	0.50	0.25	0.25	0.375	1.50	0.125	0.170	5	3
-5	2.20	0.375	0.50	0.40	0.25	0.25	0.375	-	0.125	0.170	4	2
-7	1.50	0.375	0.50	0.50	0.25	0.25	0.375	-	0.125	0.170	2	2
-9	2.00	0.375	0.50	0.50	0.25	0.25	0.375	-	0.125	0.170	3	2
-15	1.94	0.375	0.59	0.38	0.25	0.25	0.375	-	0.125	0.204	3	2
-17	2.32	0.375	0.59	0.38	0.25	0.25	0.375	-	0.125	0.204	4	2
-19	2.70	0.375	0.59	0.38	0.25	0.25	0.375	-	0.125	0.204	5	2

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,	CSP 108
CHECKED	B. McDONALD		SHEET: 2
STRESSED	---		
APPROVED	S. HAMID		

© REDRAWN

REV:

REV:

REV:

REV: C - 30 JUN 98

REV: B - 24 AUG 76

REV: A - 5 FEB 75

APPROVED: 27 JAN 61

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**  
CAGE CODE 71867  
**CSP STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

**NOTES:**

- 1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
- 2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
- 3. SHARP CORNERS: .02 RAD. MAX.
- 4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
- 5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 2A
APPROVED	S. HAMID		

REV:

REV:


REV:

REV:

REV:

REV:

APPROVED: 30 JUN 98

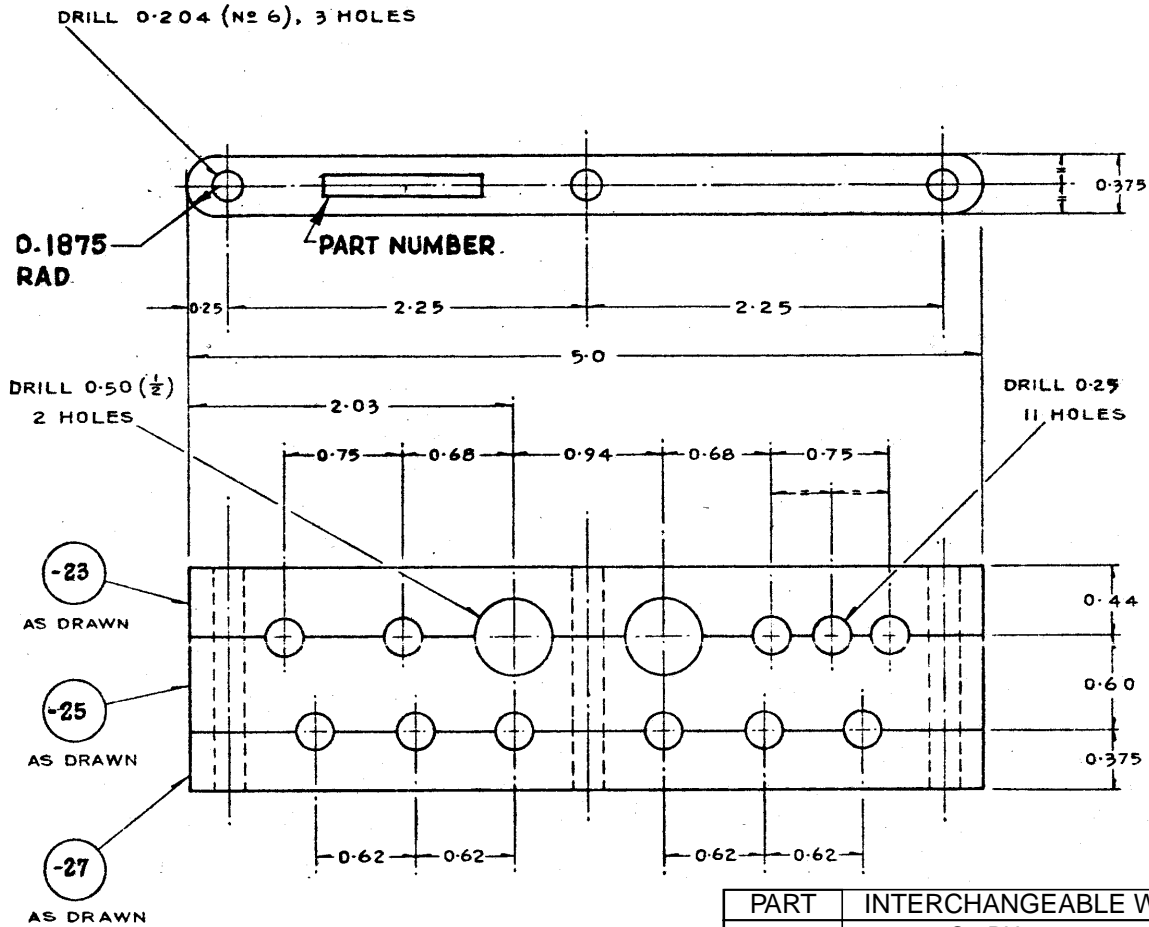

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-21** AS DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 3

© REDRAWN

REV:

REV:


REV:

REV: C - 30 JUN 98

REV: B - 24 AUG 76

REV: A - 5 FEB 75

APPROVED: 27 JAN 61

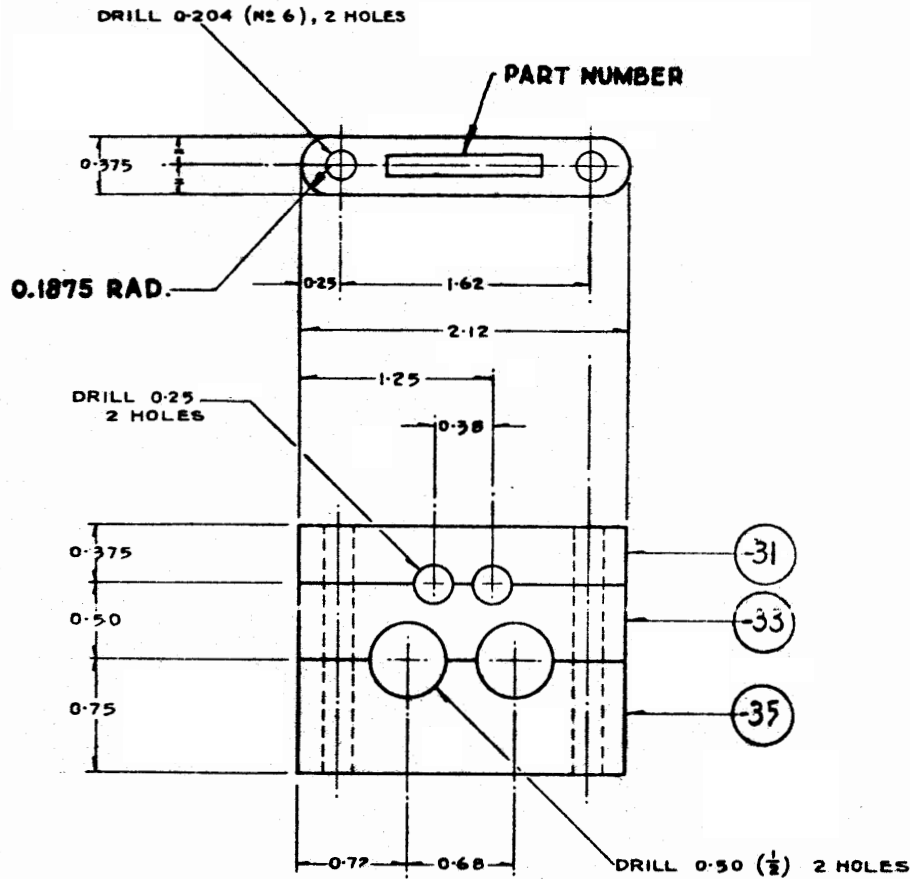

PART	INTERCHANGEABLE WITH
-29	C4-PH-1004-21
-31	C4-PH-1004-23
-33	C4-PH-1004-25
-35	C4-PH-1004-27

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-29** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 4

REDRAWN

REV:

REV:


REV: D - 30 JUN 98

REV: C - 24 AUG 76

REV: B - 5 FEB 75

REV: A - 16 JUN 61

APPROVED: 27 JAN 61

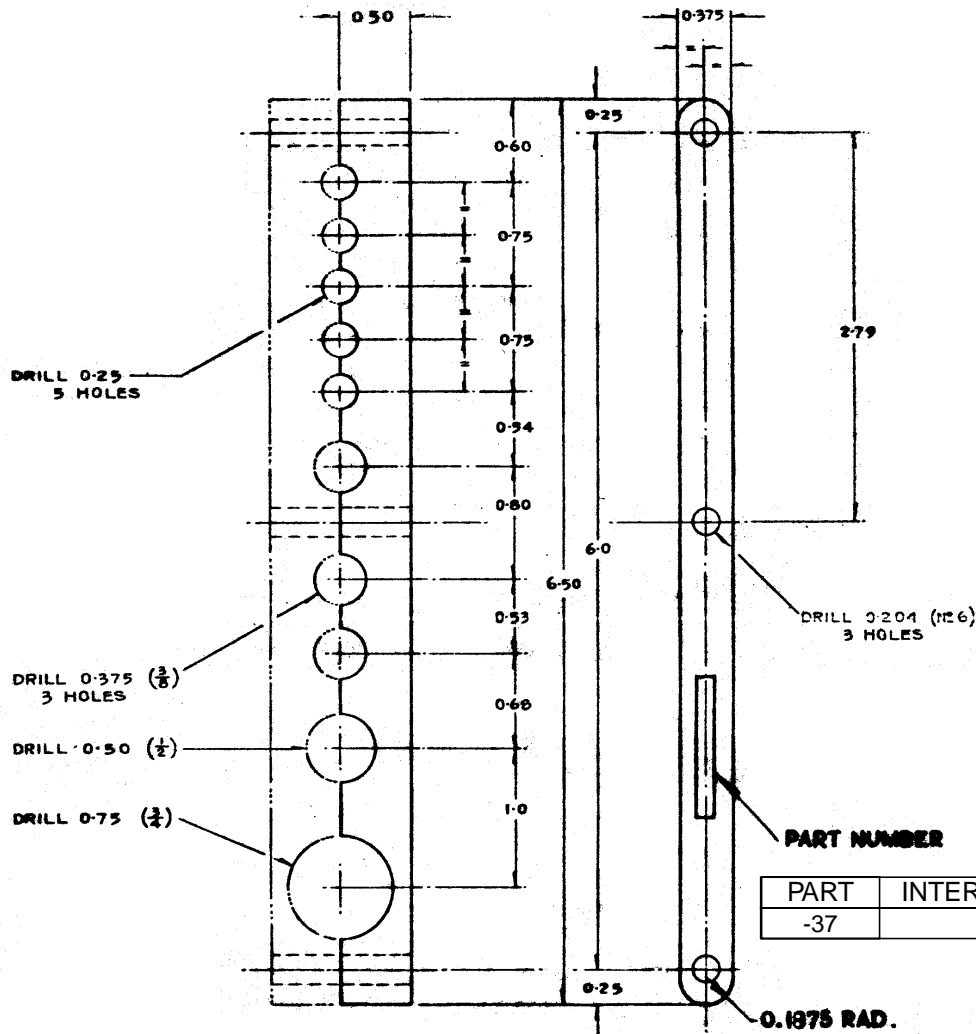

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-37** AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 5
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: REV: C - 30 JUN 98 REV: B - 24 AUG 76 REV: A - 5 FEB 75 APPROVED: 27 JAN 61



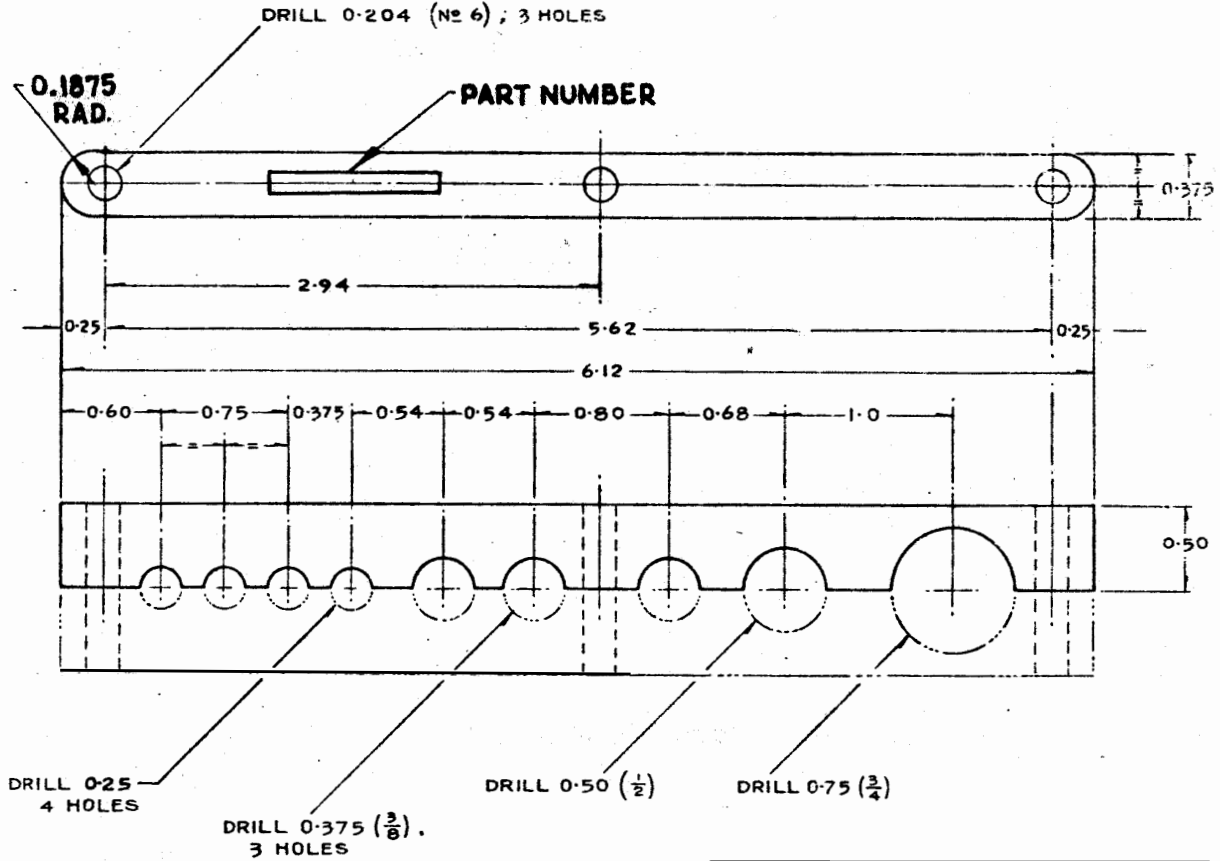

PART	INTERCHANGEABLE WITH
-39	C4-PH-1004-7

## NOTES:

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-39** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 6

© REDRAWN

REV:

REV:

REV:

REV: C - 30 JUN 98

REV: B - 24 AUG 76

REV: A - 5 FEB 75

APPROVED: 27 JAN 61

DRILL 0.204 (N26), 2 HOLES

PART NUMBER

0.1875 RAD.

0.375

0.25

2.20

2.70

1.50

0.53

0.38

0.53

0.375

DRILL 0.25, 2 HOLES

DRILL 0.375 ( $\frac{3}{8}$ ), 2 HOLES

PART	INTERCHANGEABLE WITH
-41	C4-PH-1004-17

## NOTES:

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-73
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-41** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 7

© REDRAWN

REV:

REV:


REV:

REV: C - 30 JUN 98

REV: B - 24 AUG 76

REV: A - 5 FEB 75

APPROVED: 27 JAN 61

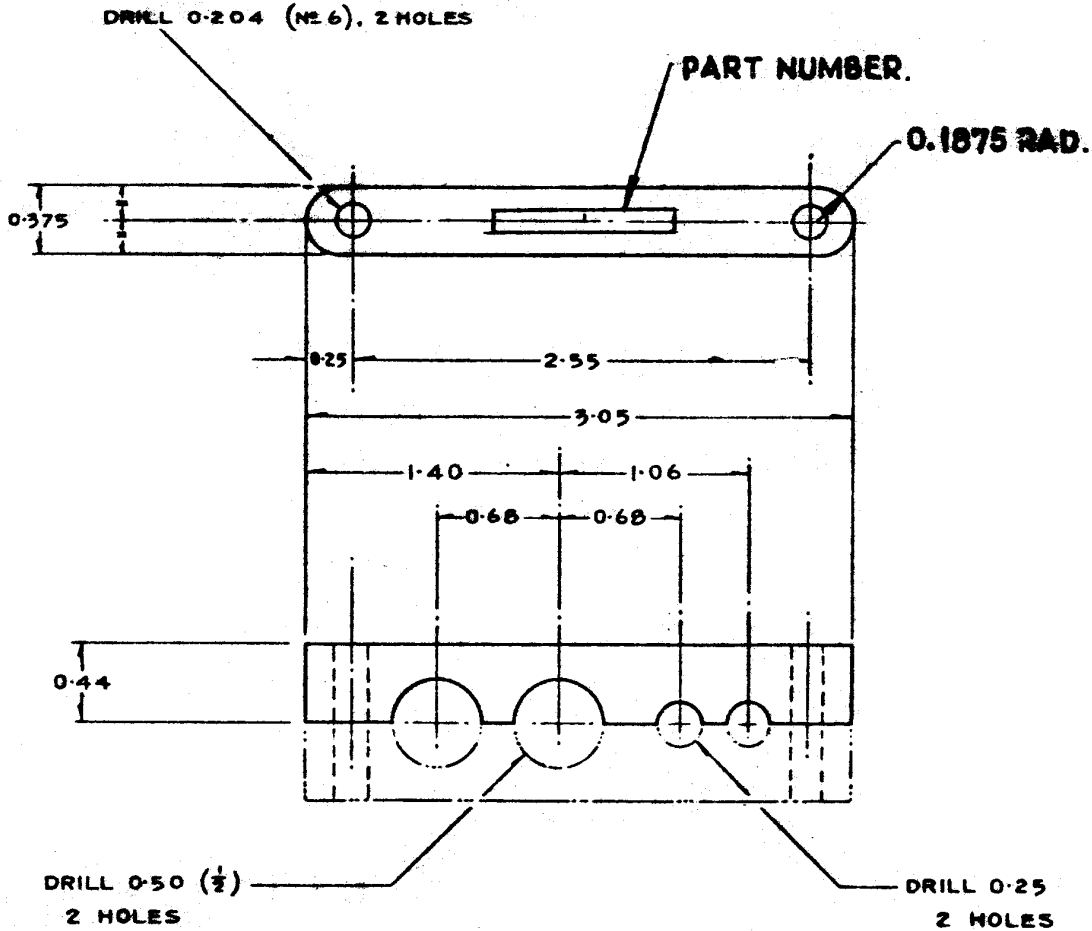

PART	INTERCHANGEABLE WITH
-43	C4-PH-1004-29

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-43** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY


DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 8
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: C - 30 JUN 98 REV: B - 24 AUG 76 REV: A - 5 FEB 75 APPROVED: 27 JAN 61

DRILL 0.204 (Nº 6)

0.1875 RAD

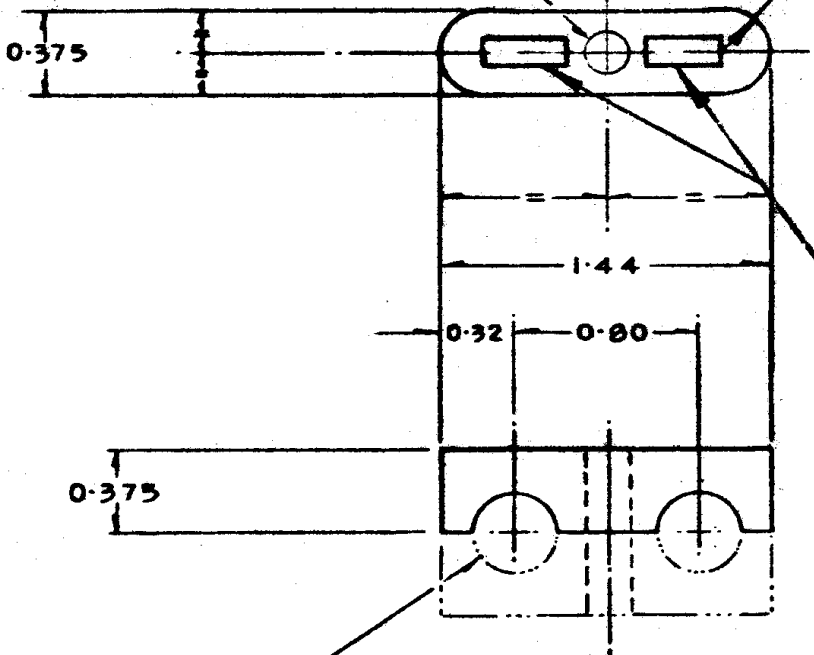

PART NUMBER

DRILL 0.375 ( $\frac{3}{8}$ )  
2 HOLES

PART	INTERCHANGEABLE WITH
-45	C4-PH-1004-15

### NOTES:

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-45** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 9

© REDRAWN

REV:

REV:


REV:

REV: C - 30 JUN 98

REV: B - 24 AUG 76

REV: A - 5 NOV 75

APPROVED: 27 JAN 61

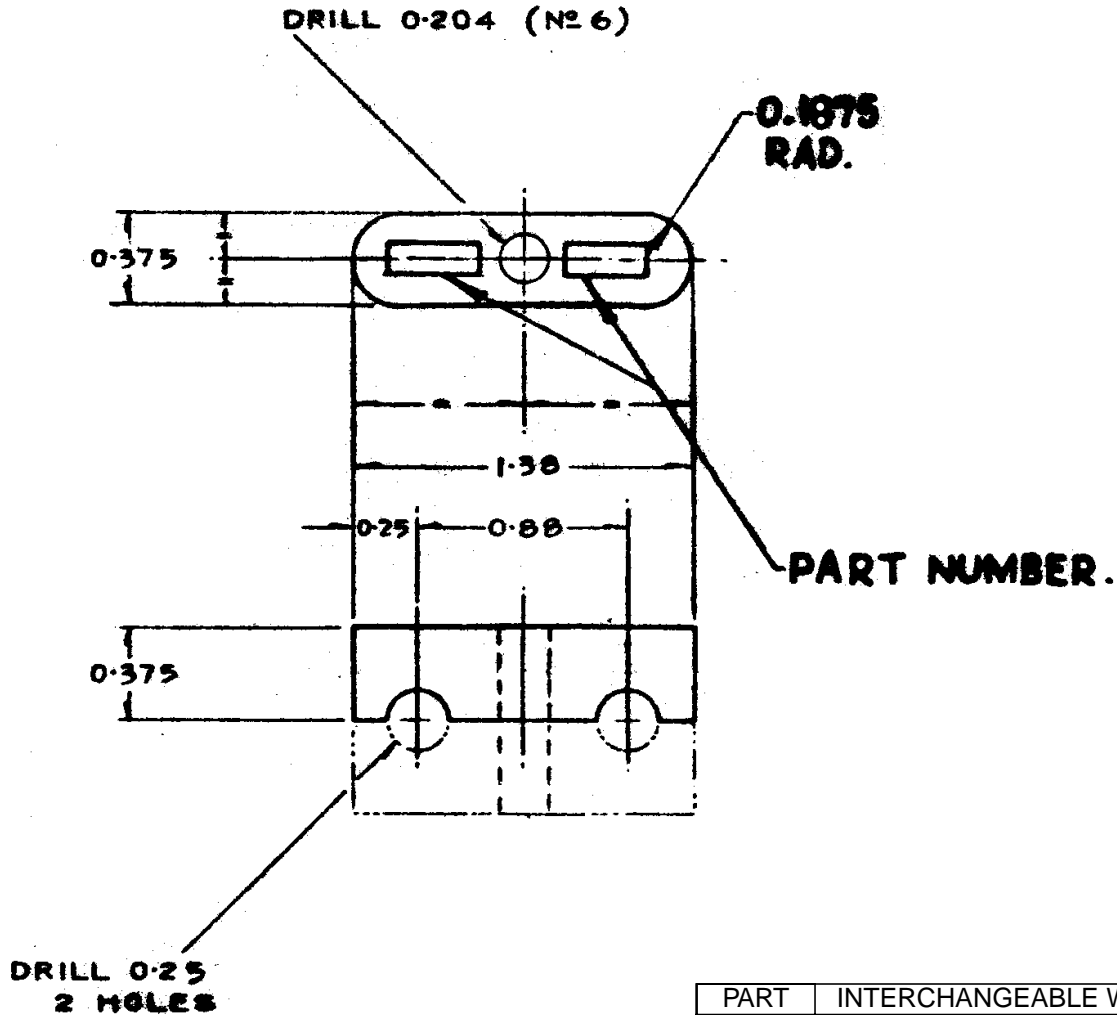

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-47** AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 10
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: C - 30 JUN 98 REV: B - 24 AUG 76 REV: A - 5 FEB 75 APPROVED: 27 JAN 61



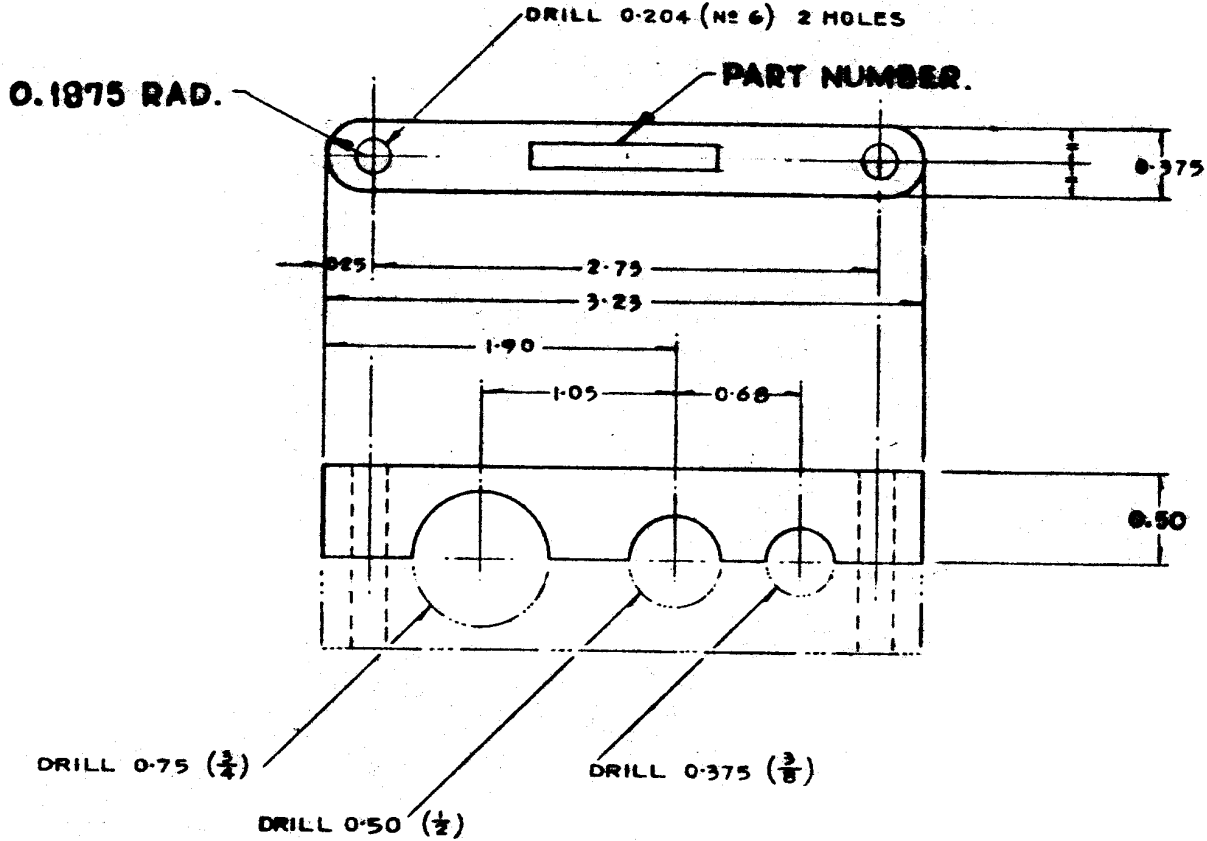

PART	INTERCHANGEABLE WITH
-51	C4-PH-1004-13

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-51** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 12
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: C - 30 JUN 98 REV: B - 24 AUG 76 REV: A - 5 FEB 75 APPROVED: 27 JAN 61

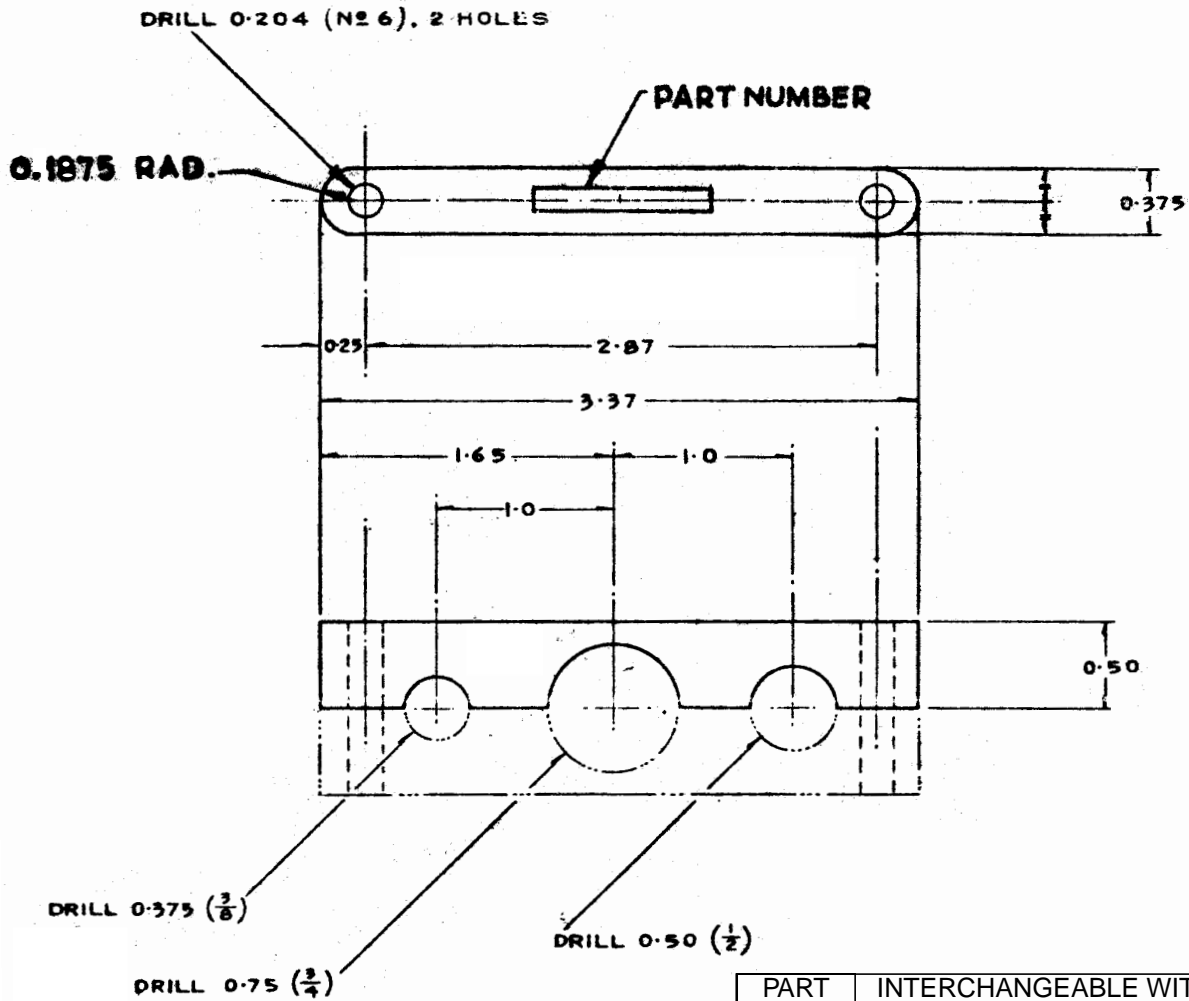

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-53** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 13
APPROVED	S. HAMID		

© REDRAWN

REV: 27 JAN 61  
REV: A - 5 FEB 74  
REV: B - 24 AUG 76  
REV: C - 30 JUN 98  
REV: 27 JAN 61




THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**

CAGE CODE 71867  
CSP STANDARD

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

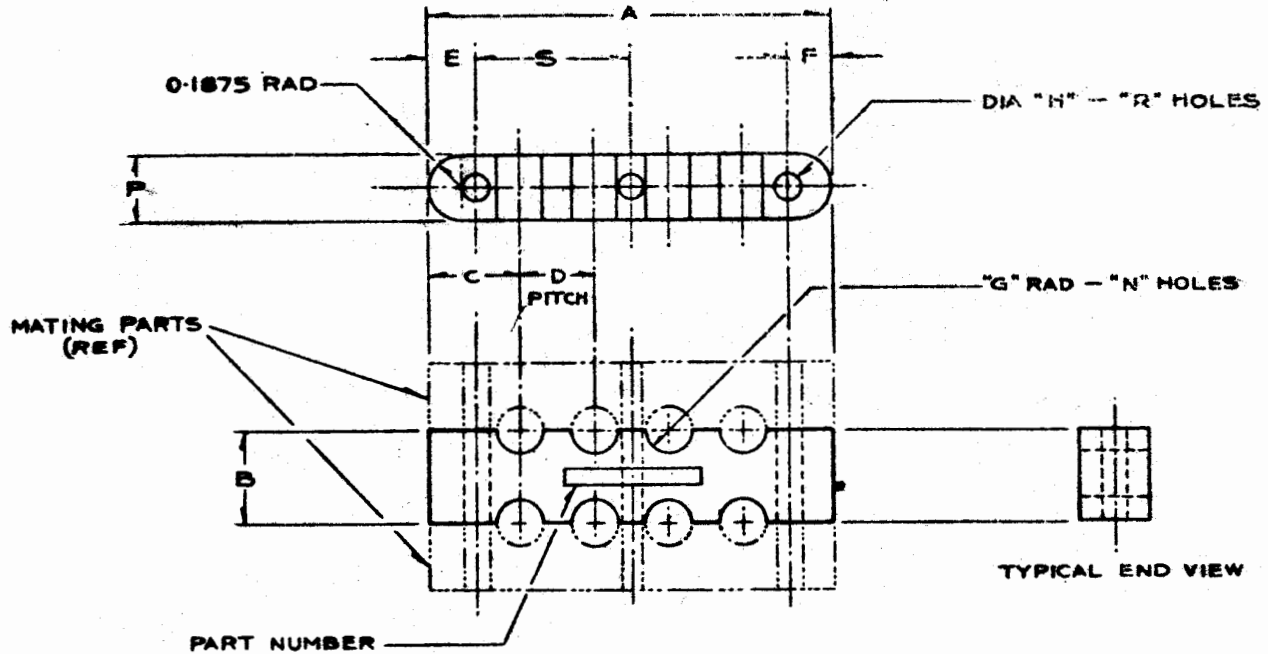

TO MATE WITH	PART NO.	DIMENSIONS								RAD. G	DIA. H	NO. OF HOLES	
		A	B	C	D	E	F	P	S			N	R
-5	-55	2.20	.50	.50	.40	.25	.25	.375		.125	.170	8	2
-7	-57	1.50	.50	.50	.50	.25	.25	.375		.125	.170	4	2
-9	-59	2.00	.50	.50	.50	.25	.25	.375		.125	.170	6	2
-1	-61	2.50	.50	.75	.50	.50	.50	.375		.125	.170	6	2
-3	-63	3.00	.50	.50	.50	.25	.25	.375	1.50	.125	.170	10	3
-15	-65	1.94	.50	.59	.38	.25	.25	.375		.125	.204	6	2
-17	-67	2.32	.50	.59	.38	.25	.25	.375		.125	.204	8	2
-19	-69	2.70	.50	.59	.38	.25	.25	.375		.125	.204	10	2

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 14

REDRAWN

REV:

REV:

REV: D - 30 JUN 98

REV: C - 24 AUG 76

REV: B - 5 FEB 75

REV: A - 16 DEC 61

APPROVED: 3 DEC 63

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**  
CAGE CODE 71867  
**CSP STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

**NOTES:**

- 1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
- 2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
- 3. SHARP CORNERS: .02 RAD. MAX.
- 4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
- 5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 14A
APPROVED	S. HAMID		

REV:

REV:


REV:

REV:

REV:

REV:

APPROVED: 30 JUN 98

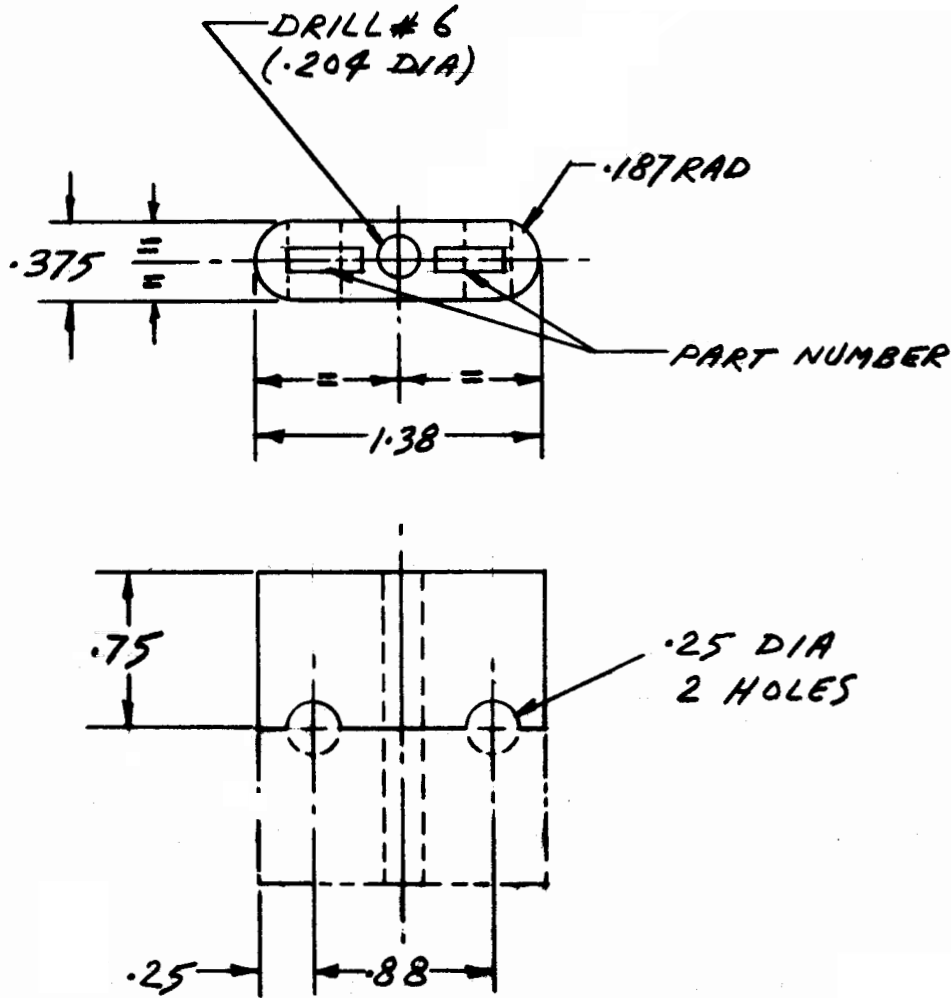

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-71 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 15
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: C - 30 JUN 98 REV: B - 24 AUG 76 REV: A - 4 FEB 75 APPROVED: 28 SEP 65

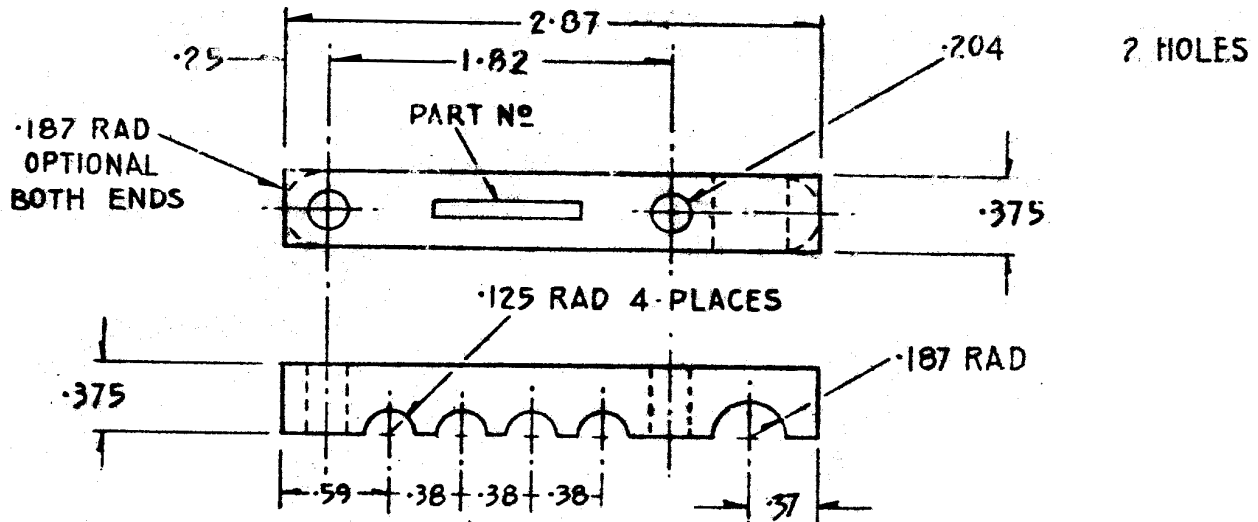

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-73** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 16
APPROVED	S. HAMID		

© REDRAWN

REV:

REV:


REV:

REV: C - 30 JUN 98

REV: B - 24 AUG 76

REV: A - 5 FEB 75

APPROVED: 6 FEB 69

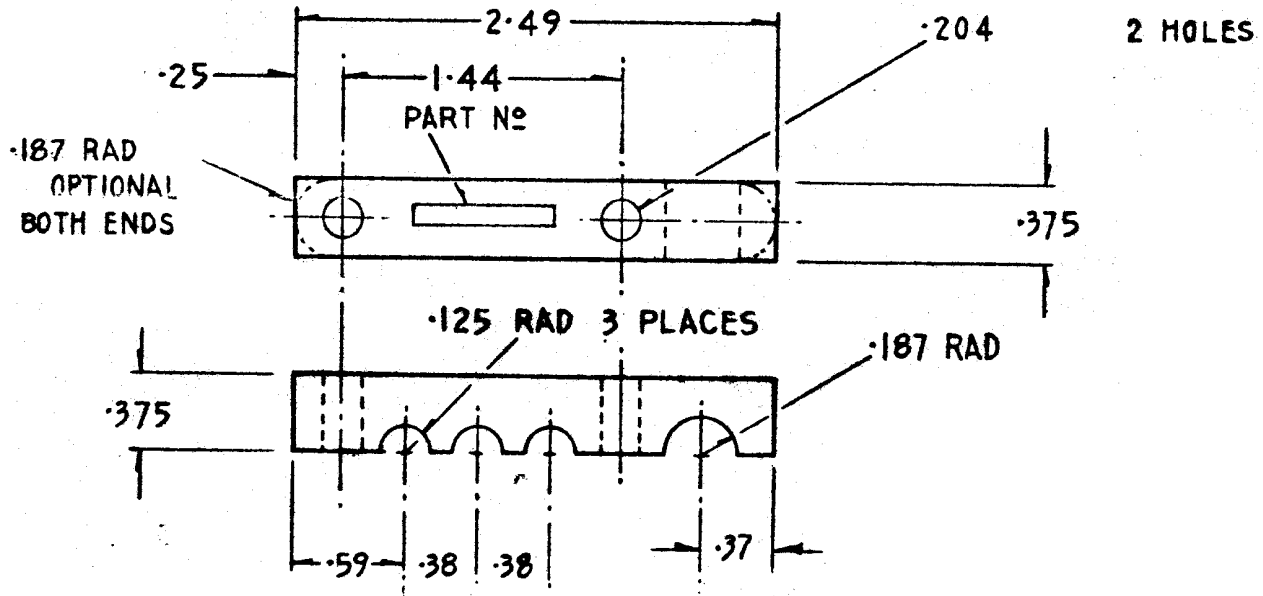

**NOTES:**


1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-75** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 16A
APPROVED	S. HAMID		

REV: REV: REV: REV: REV: REV: APPROVED: 30 JUN 98

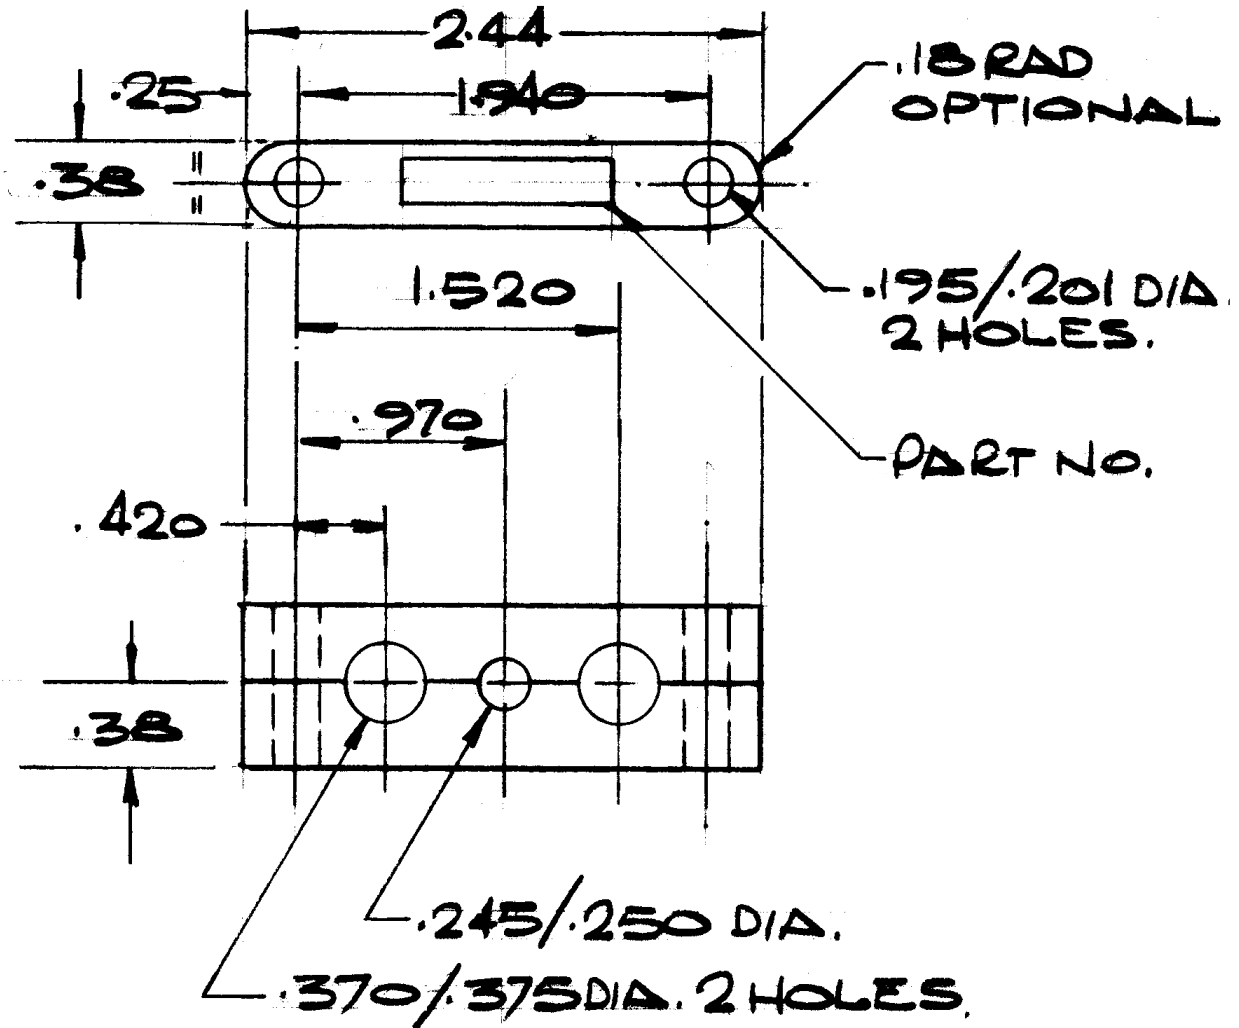

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-77** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 17
APPROVED	S. HAMID		

REDRAWN

REV: REV: REV: REV: REV: A - 24 AUG 76 REV: B - 30 JUN 98 REV: 1 APR 74

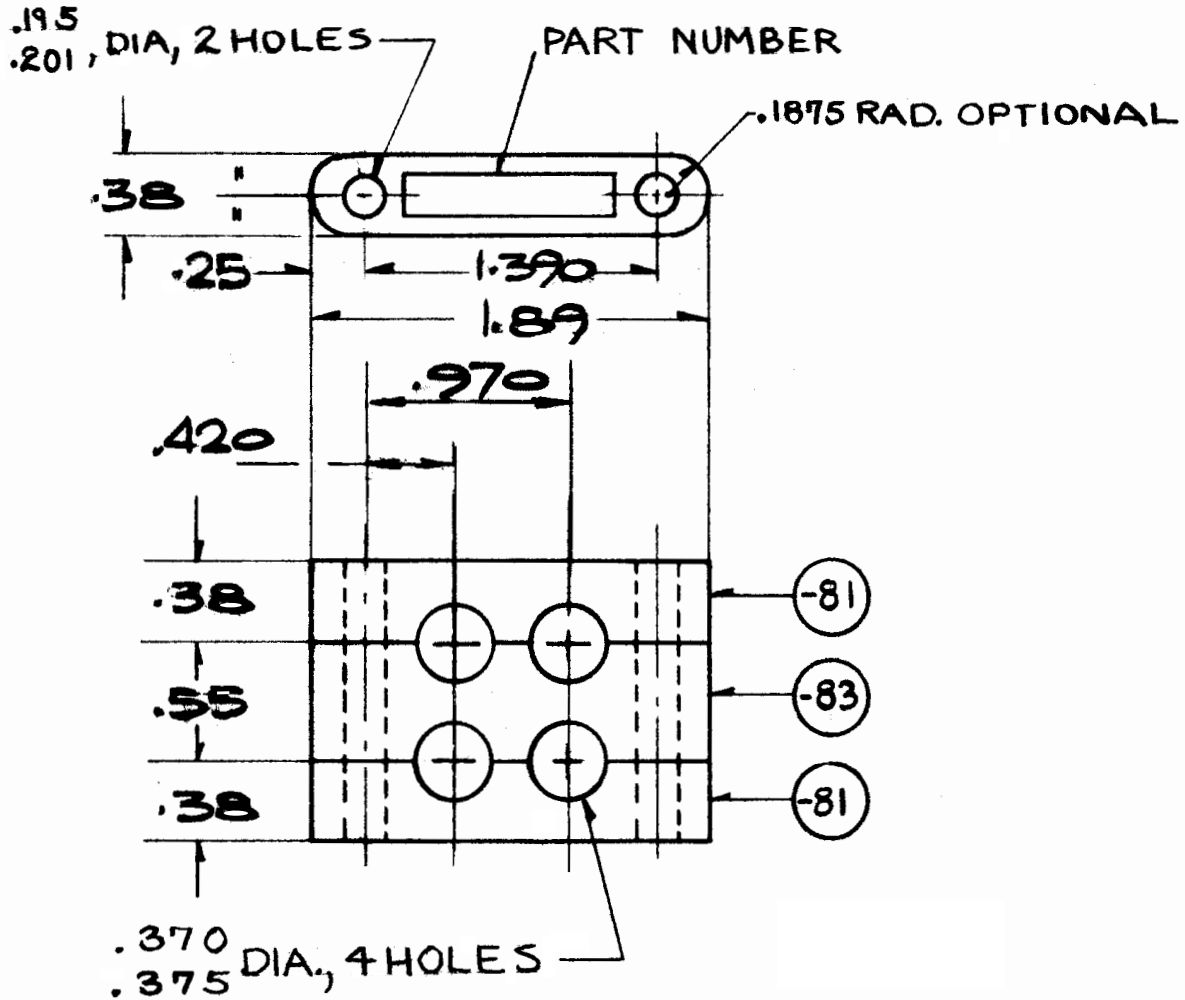

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-4
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-79** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 18
APPROVED	S. HAMID		

REDRAWN

REV: REV: REV: REV: B - 30 JUN 98 REV: A - 24 AUG 76 REV: 1 APR 74

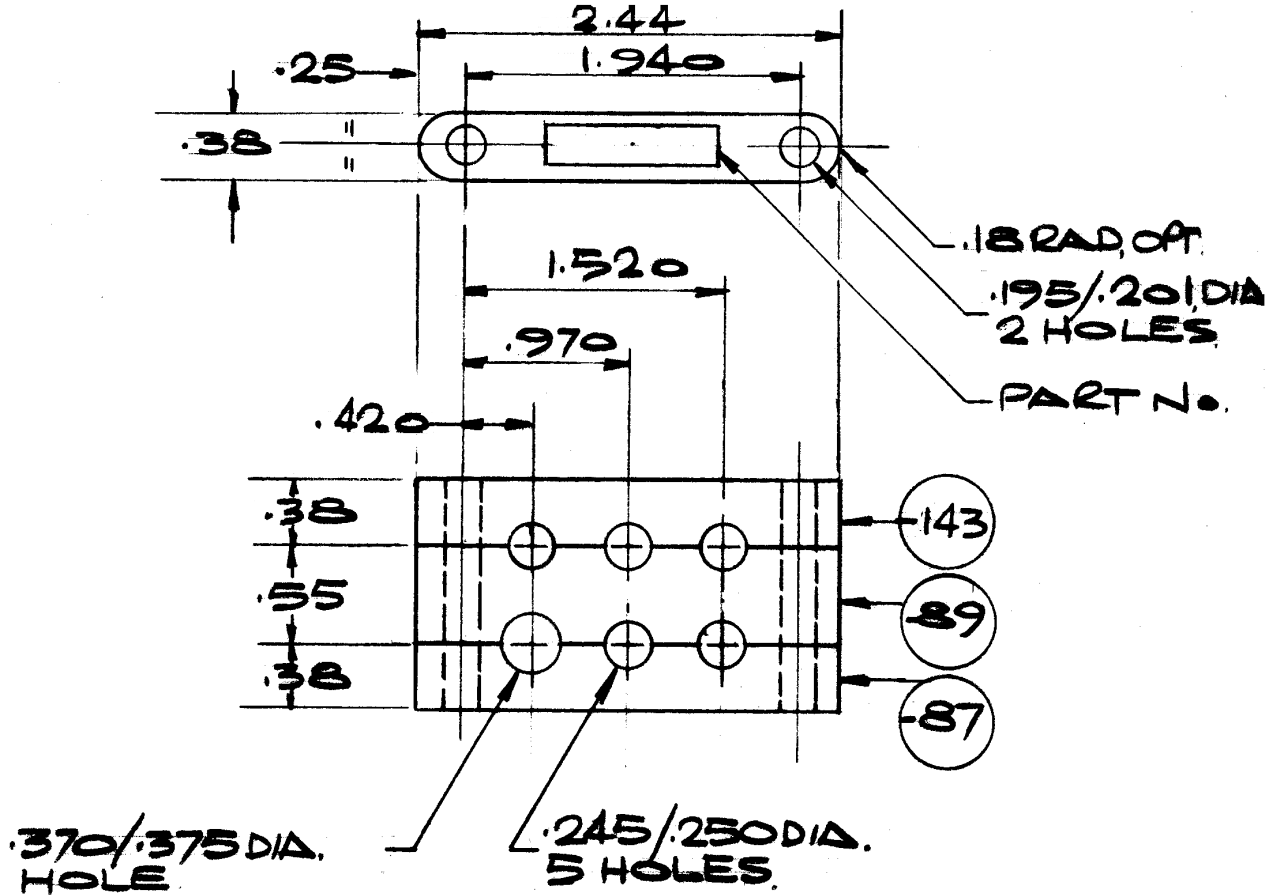

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-5
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-85 AS DRAWN**

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 19

REDRAWN

REV:

REV:

REV:

REV:

REV: B - 30 JUN 98


REV: A - 24 AUG 76

APPROVED: 1 APR 74



APPROVED: 26 FEB 74



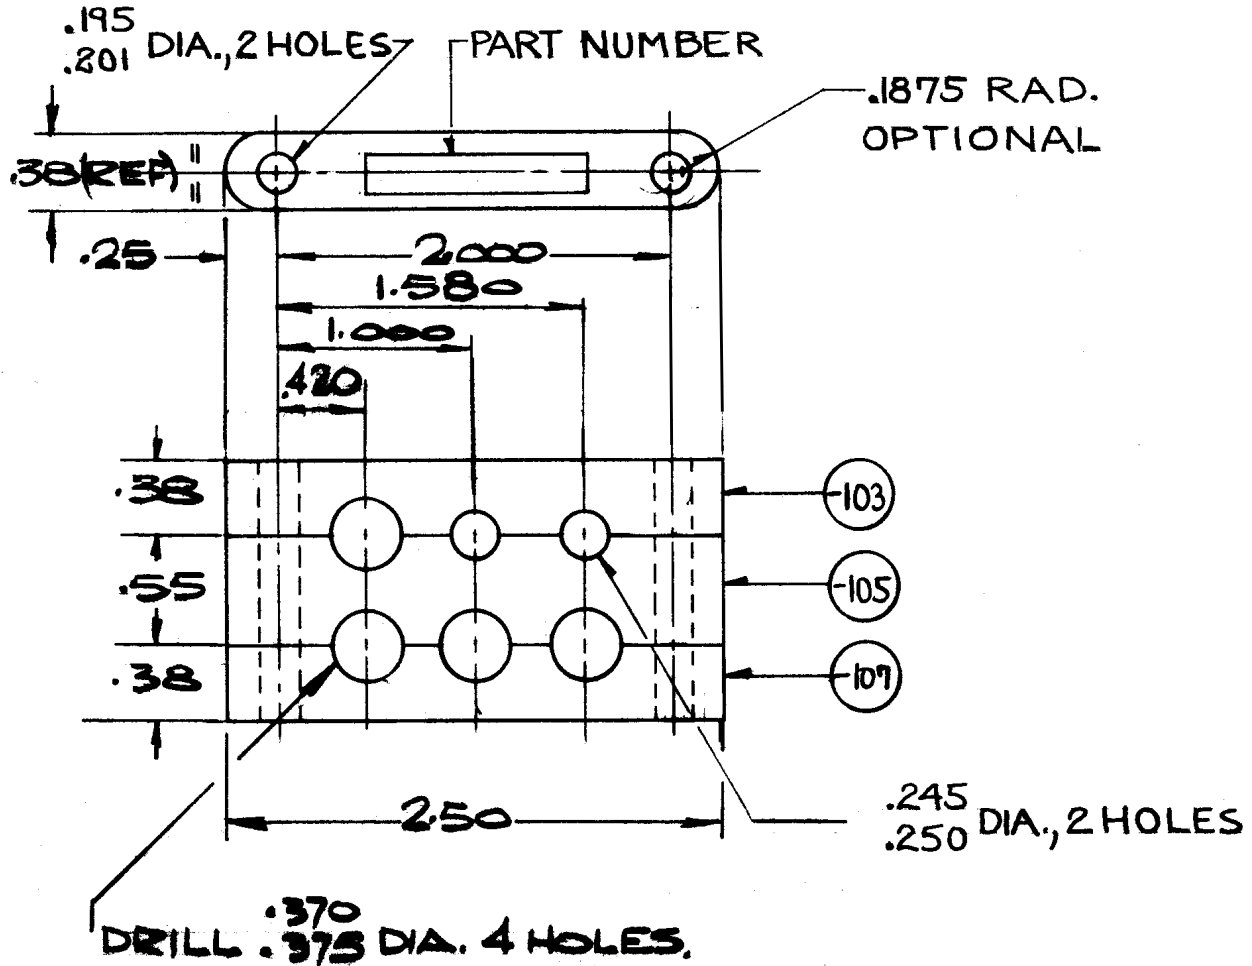

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-6
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-101** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 22
APPROVED	S. HAMID		

REDRAWN

REV: REV: REV: REV: REV: A - 24 AUG 76 REV: B - 30 JUN 98 REV: 26 FEB 74

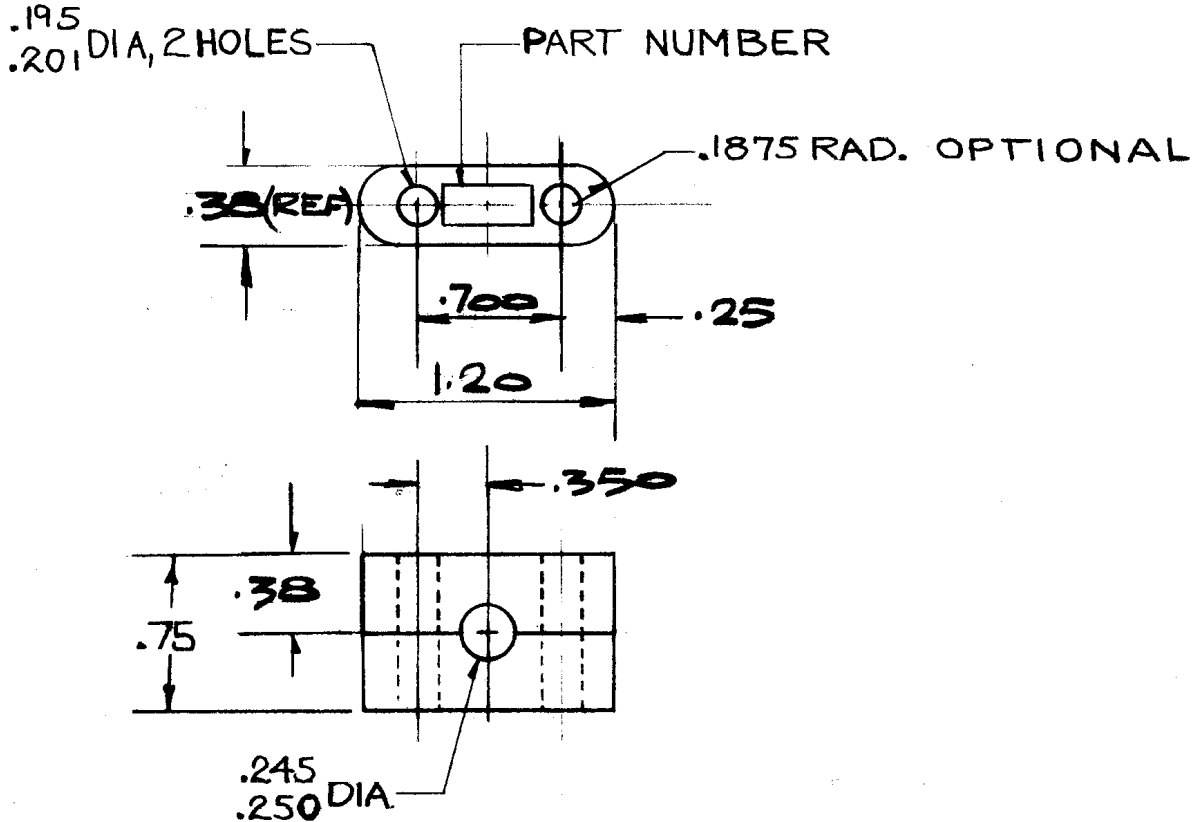

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-8
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-109 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 23
APPROVED	S. HAMID		

© REDRAWN

REV: C - 30 JUN 98  
REV: B - 26 NOV 86  
REV: A - 24 AUG 76  
APPROVED: 26 FEB 74

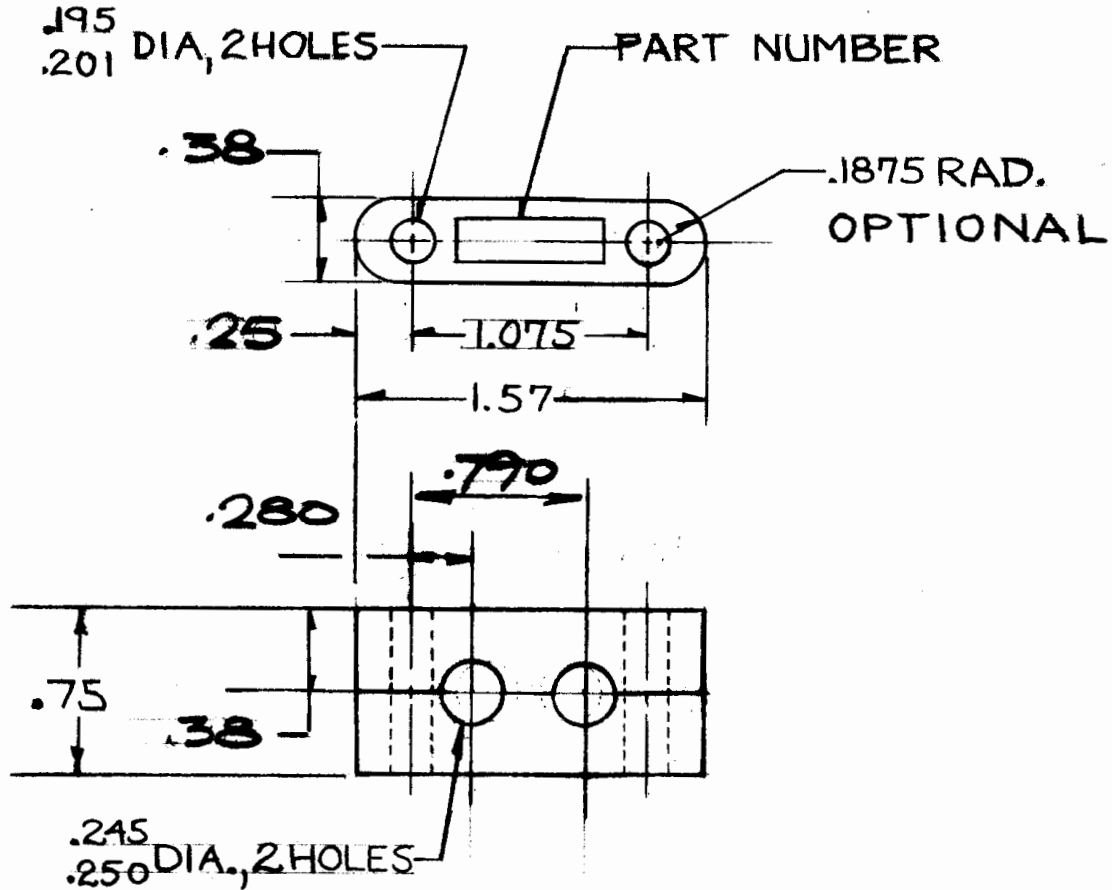

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-9
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-111 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 24
APPROVED	S. HAMID		

© REDRAWN

REV: 1 APR 74  
REV: A - 24 AUG 76  
REV: B - 26 NOV 86  
REV: C - 30 JUN 98  
REV: 1 APR 74

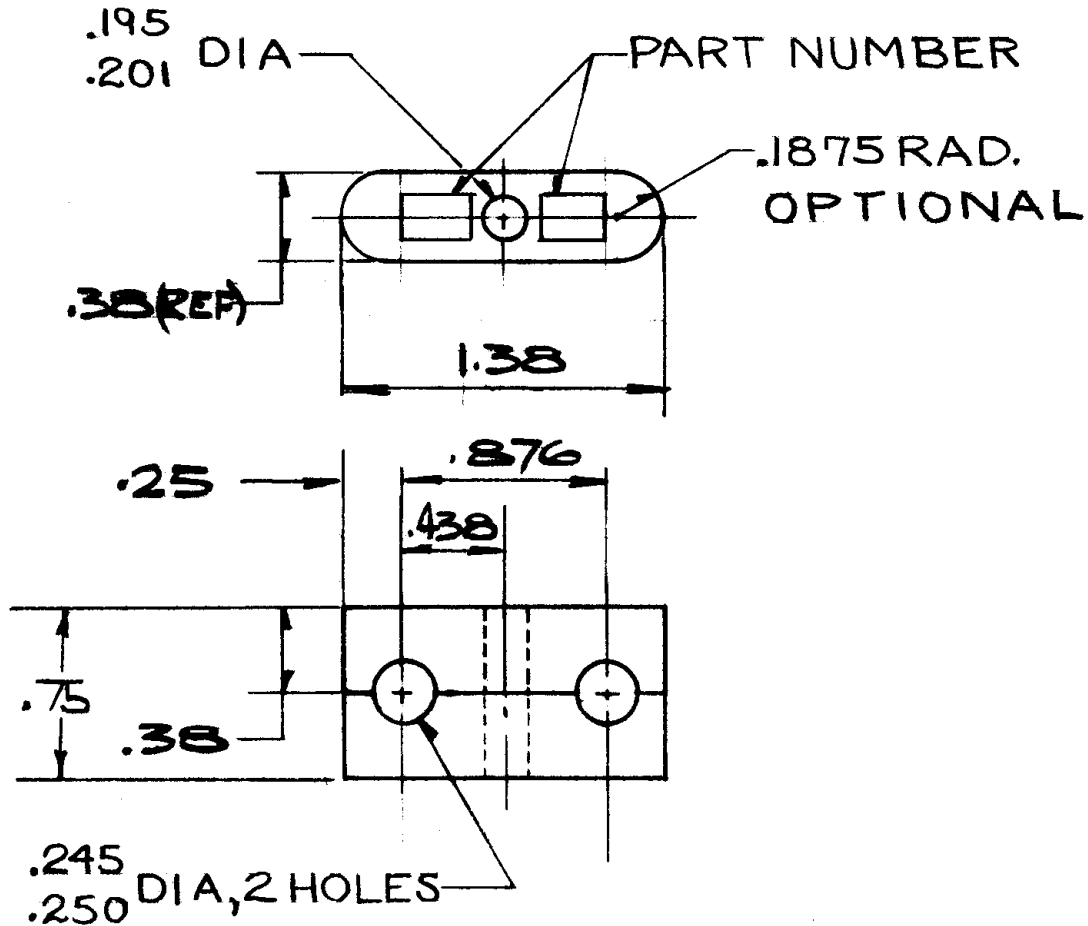

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-1
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-113 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 25
APPROVED	S. HAMID		

© REDRAWN

REV: 26 FEB 74  
REV: A - 24 AUG 76  
REV: B - 26 NOV 86  
REV: C - 30 JUN 98  
REV: 26 FEB 74

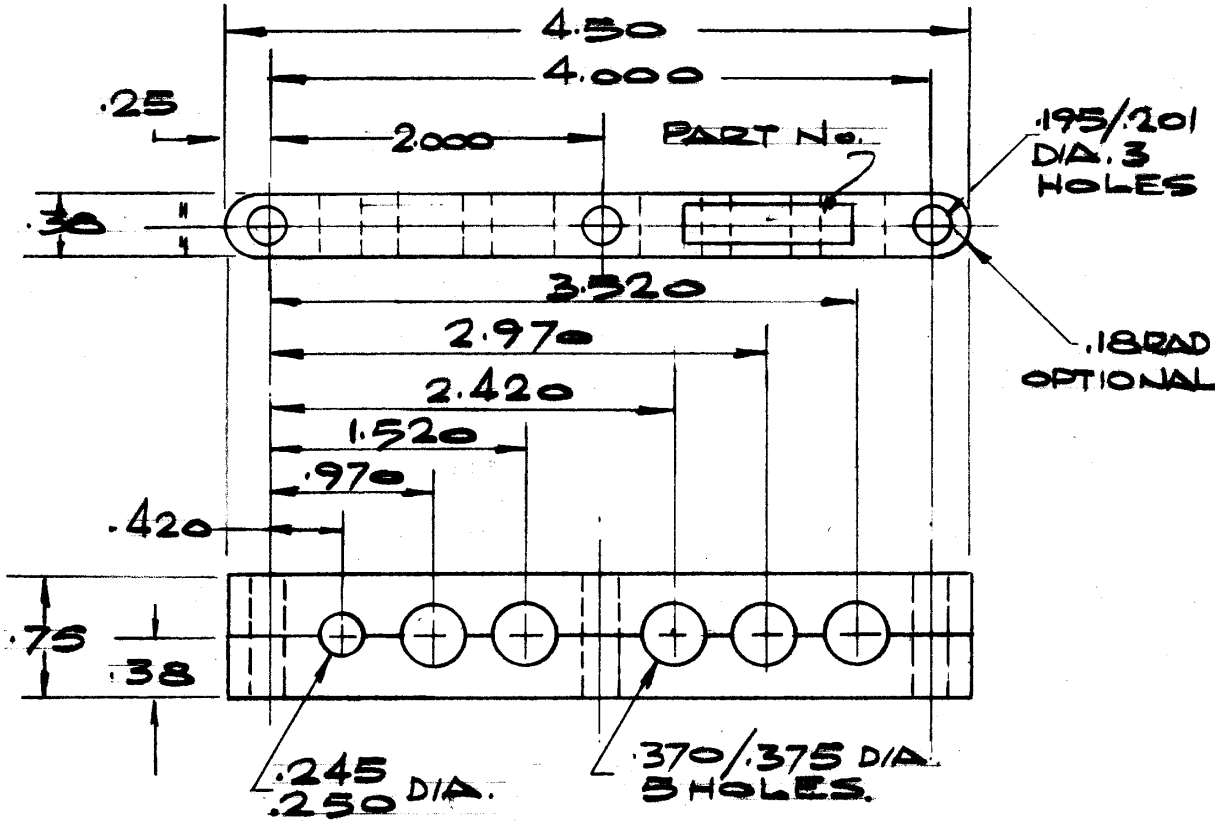

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-23
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-115 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 26

REDRAWN

REV:

REV:


REV:

REV:

REV: B - 30 JUN 98

REV: A - 24 AUG 76

APPROVED: 11 APR 74

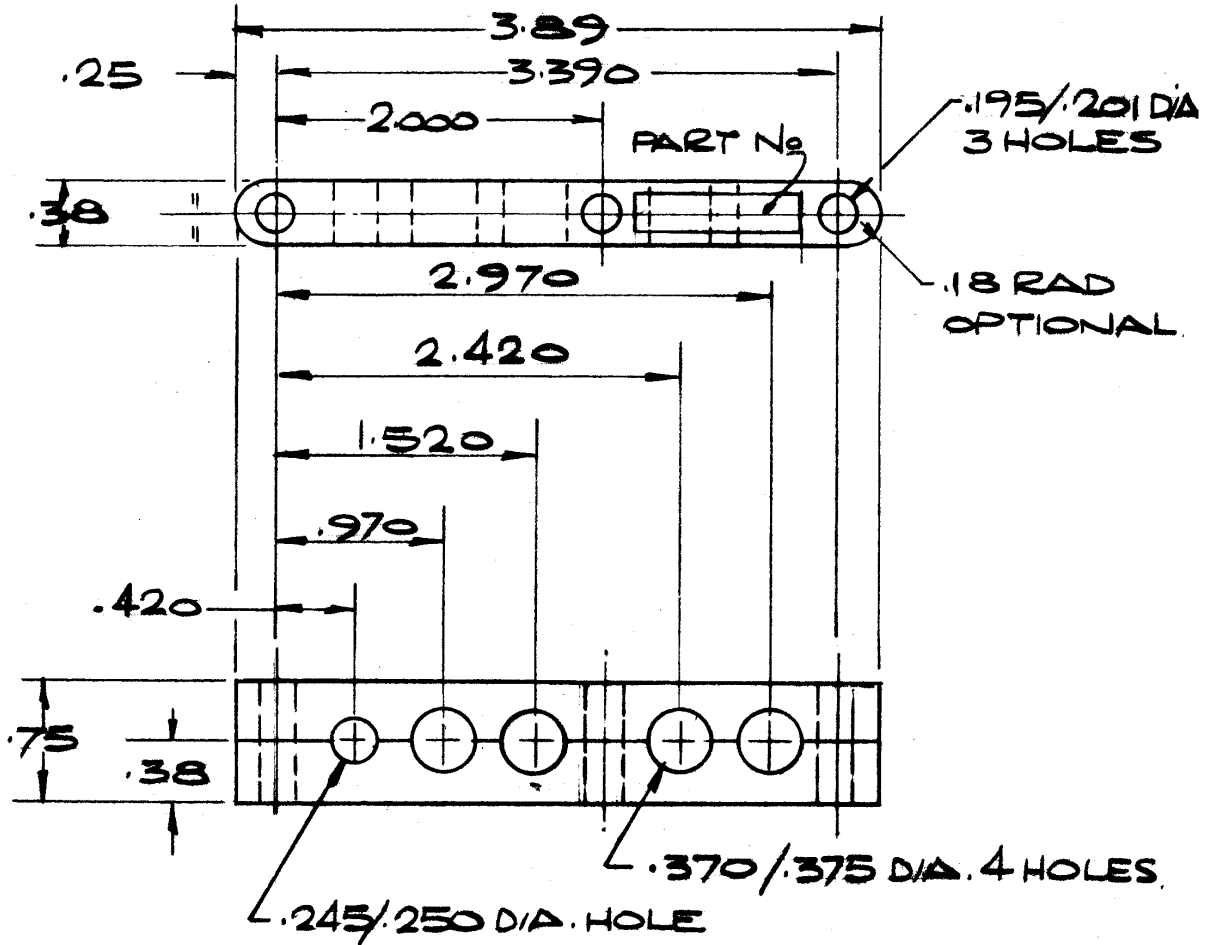

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-22
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-117 AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 27
APPROVED	S. HAMID		

REDRAWN

REV: 11 APR 74  
REV: A - 24 AUG 76  
REV: B - 30 JUN 98  
REV: 11 APR 74



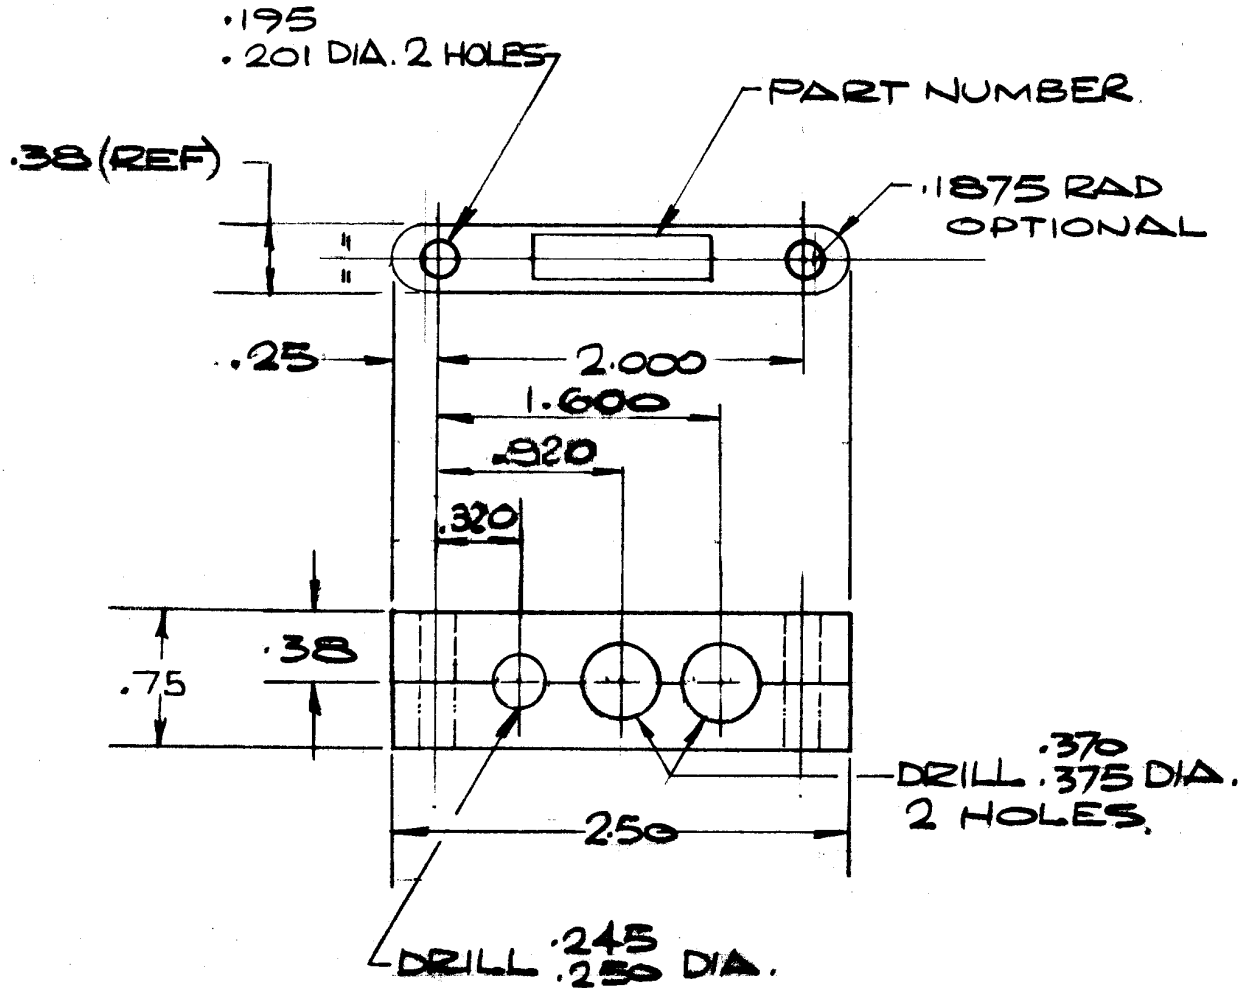

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-6
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-119 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 28
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: C - 30 JUN 98 REV: B - 26 NOV 86 REV: A - 24 AUG 76 APPROVED: 26 FEB 74

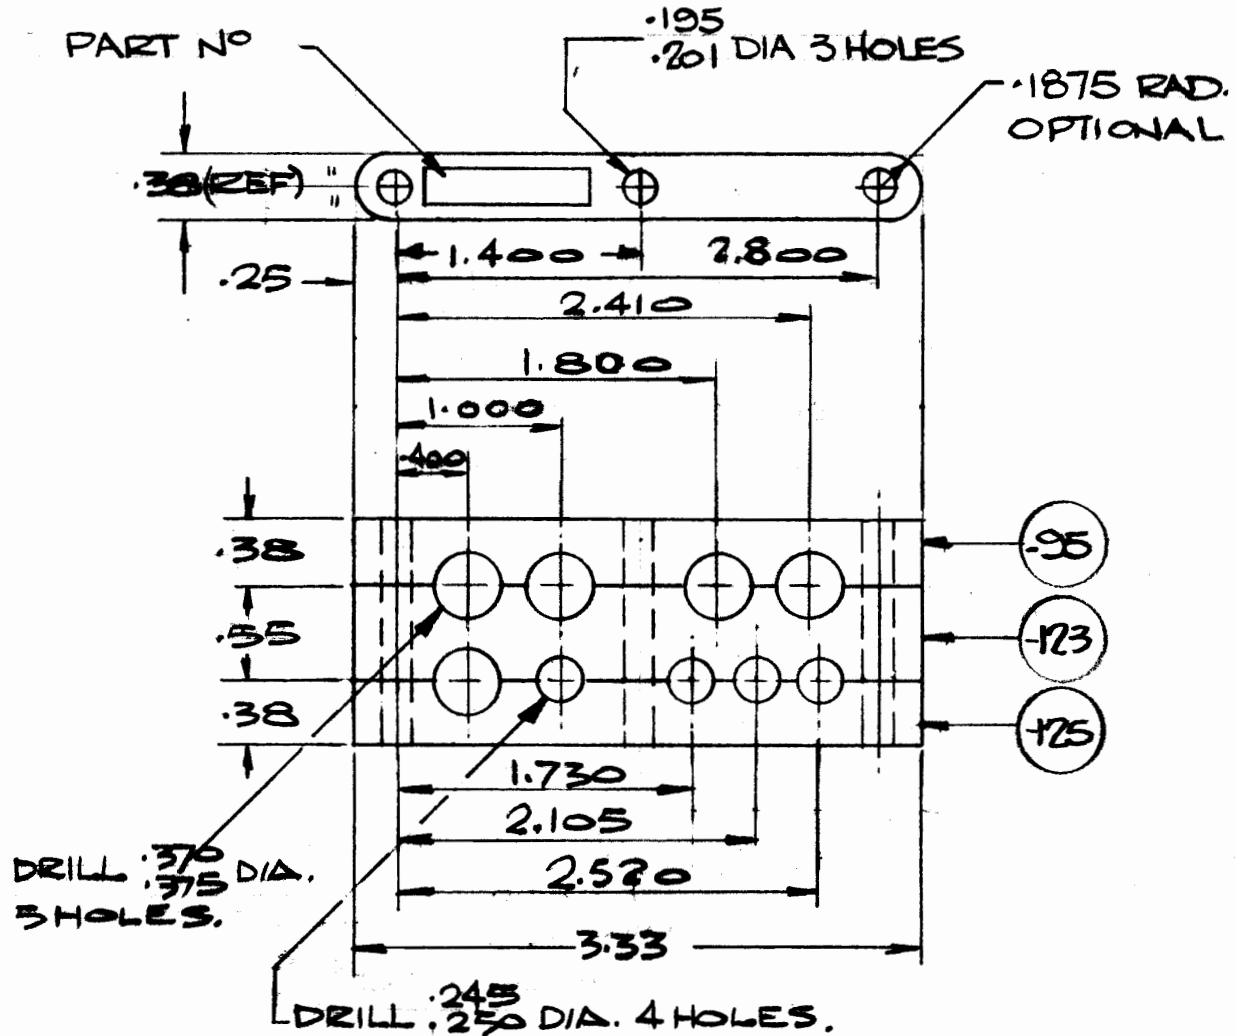

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-7
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-121** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 29

REDRAWN

REV:

REV:


REV:

REV:

REV: B - 30 JUN 98

REV: A - 24 AUG 76

APPROVED: 26 FEB 74

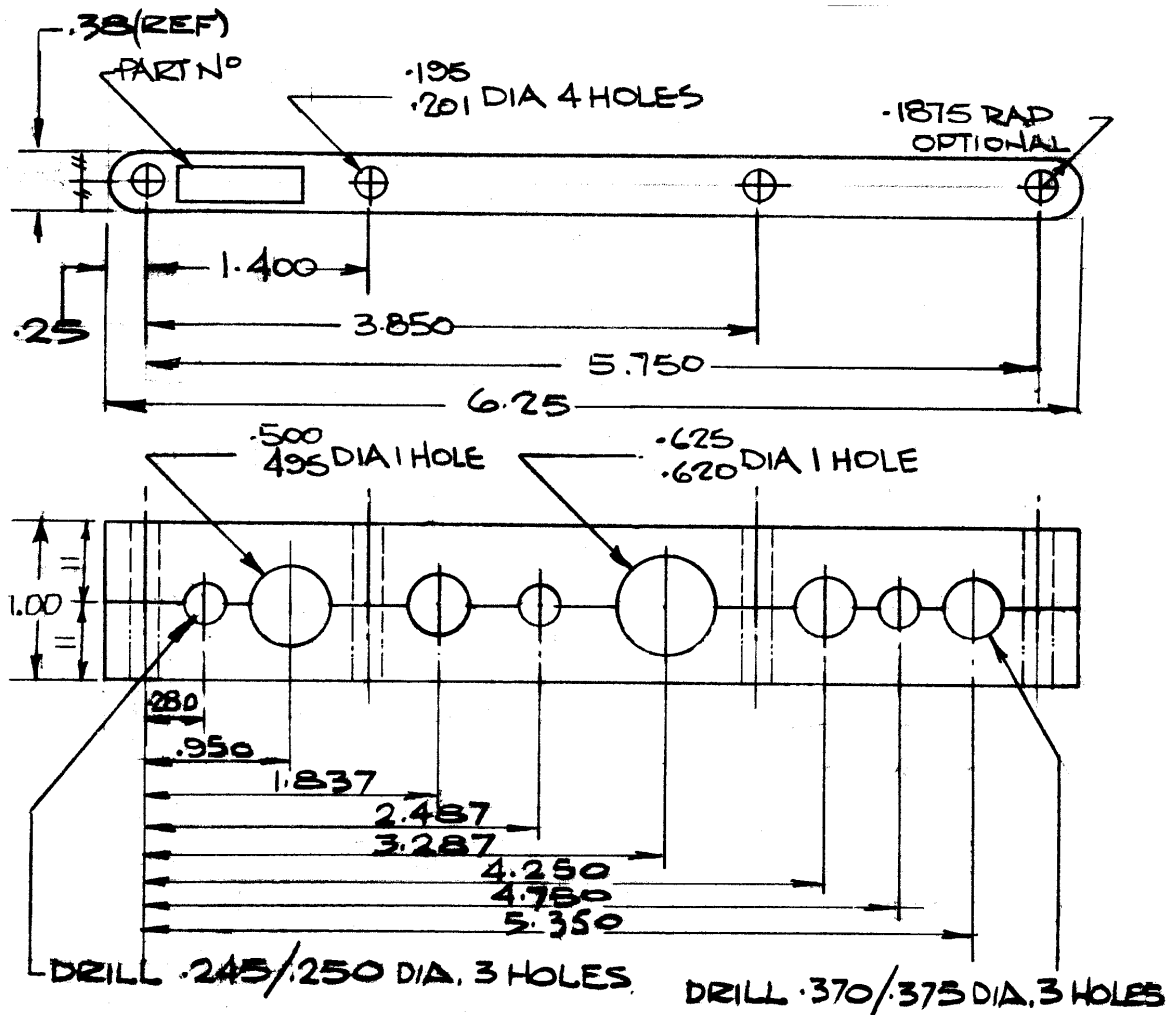

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-28
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-127 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 30
APPROVED	S. HAMID		

REDRAWN

REV: A - 18 SEP 74  
REV: B - 24 AUG 76  
REV: C - 26 NOV 86  
REV: D - 30 JUN 98  
APPROVED: 26 FEB 74

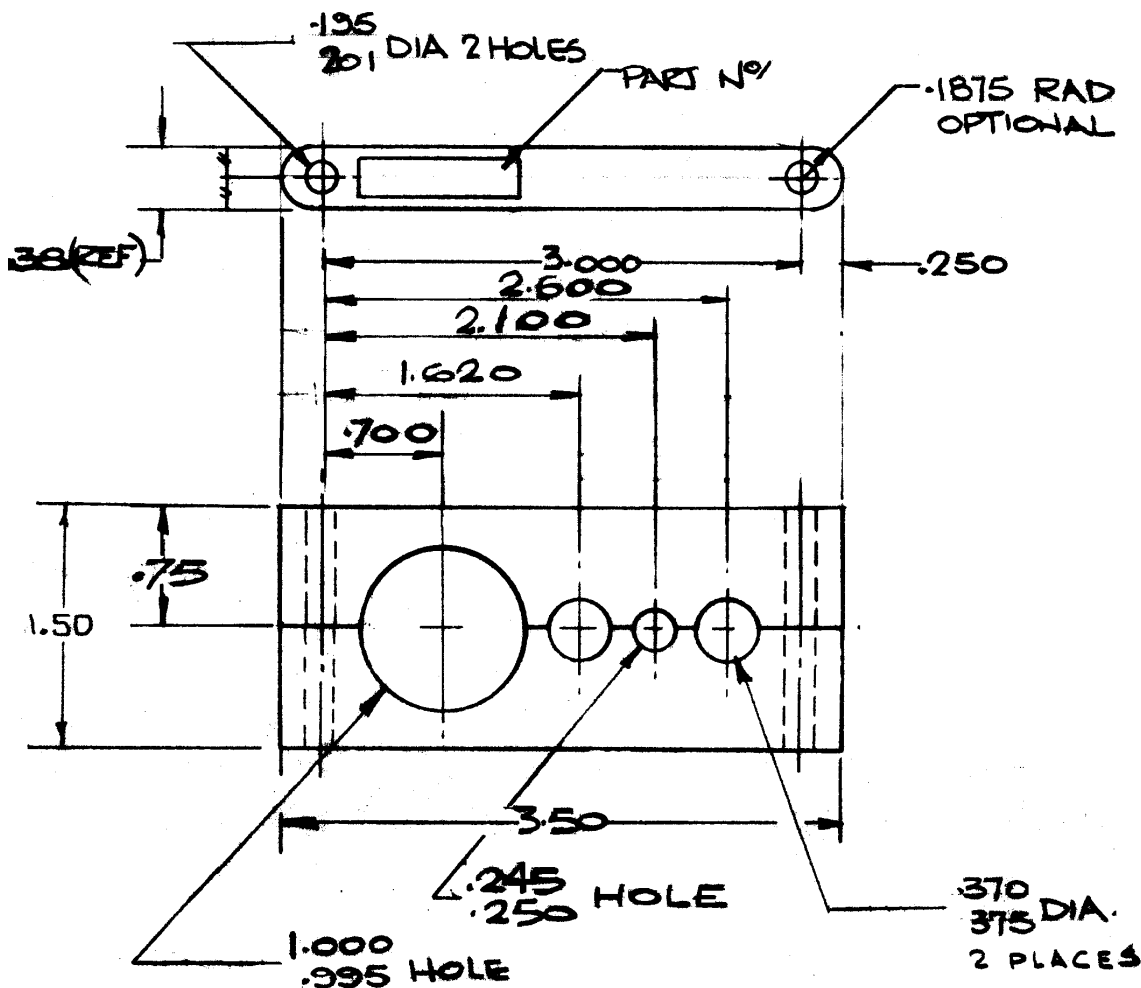

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-90
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-129 AS DRAWN**

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 31

© REDRAWN

REV:

REV:


REV:

REV: C - 30 JUN 98

REV: B - 26 NOV 86

REV: A - 24 AUG 76

APPROVED: 26 FEB 74

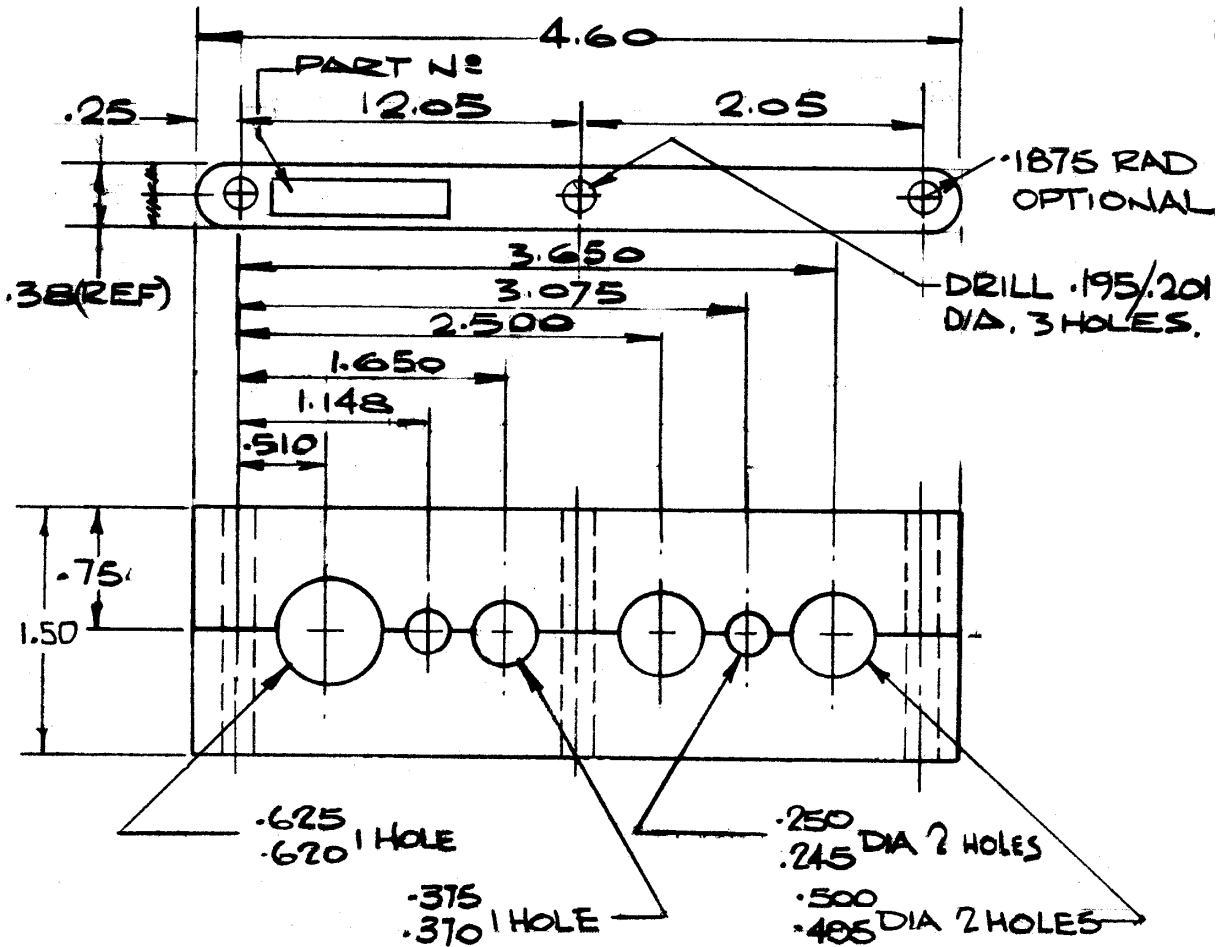

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-19
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-131 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 32
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: C - 30 JUN 98 REV: B - 26 NOV 86 REV: A - 24 AUG 76 APPROVED: 26 FEB 74

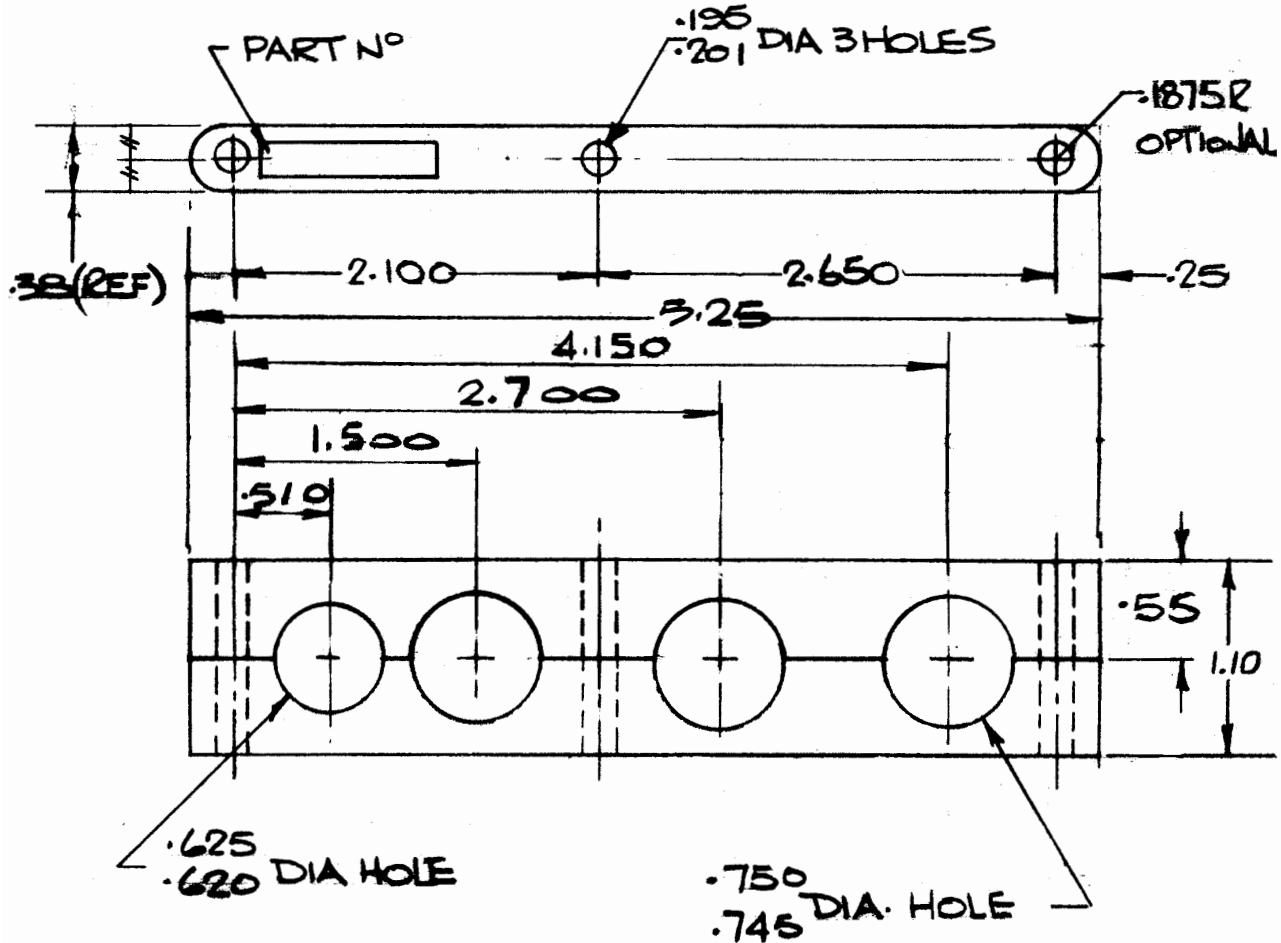

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-20
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-133 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 33
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: REV: C - 30 JUN 98 REV: B - 26 NOV 86 REV: A - 24 AUG 76 APPROVED: 26 FEB 74

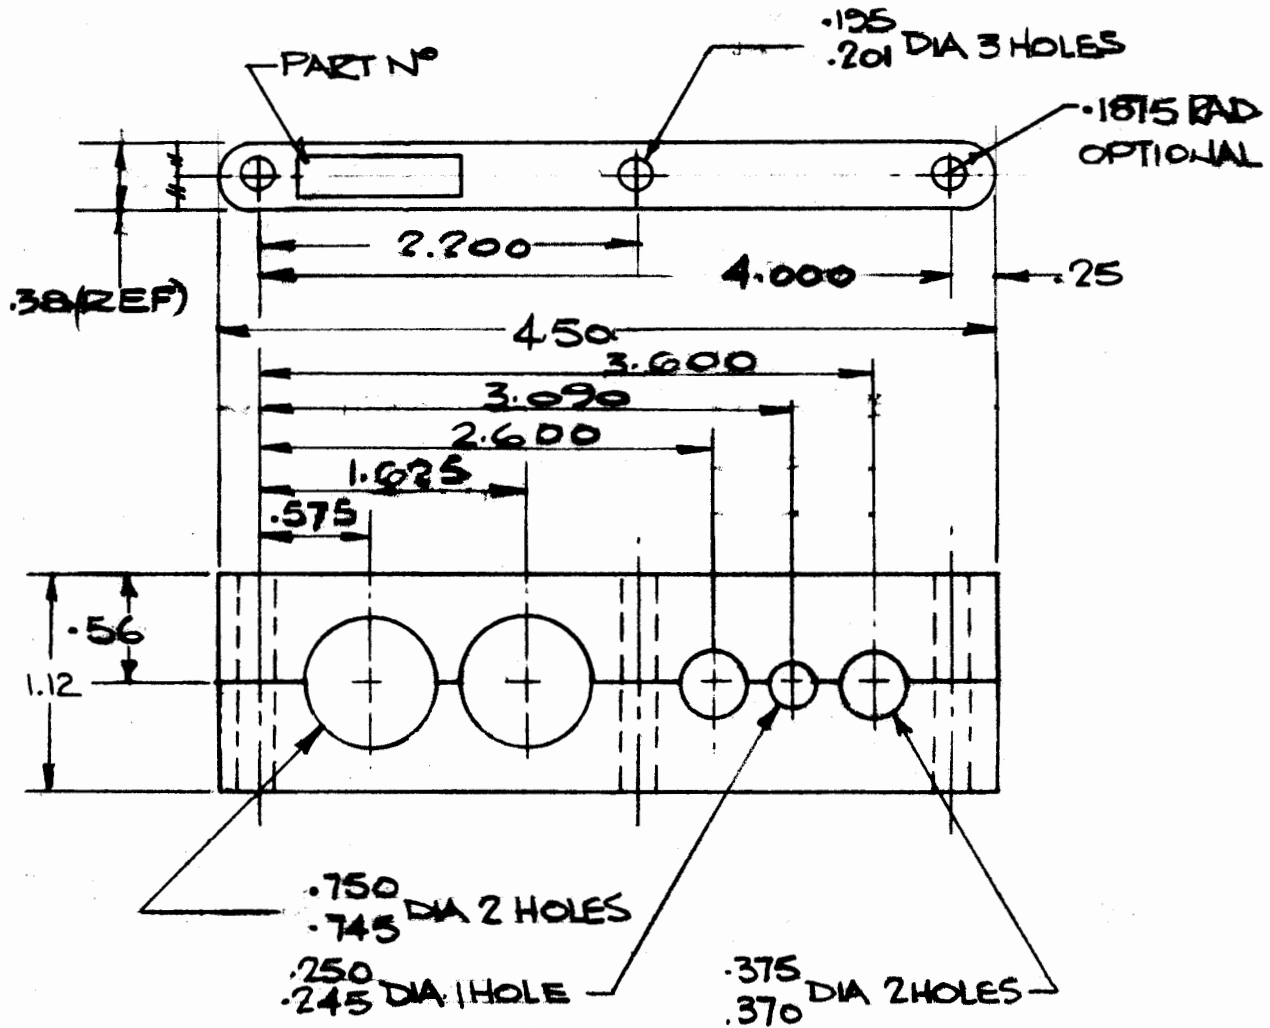

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-21
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-135 AS DRAWN**

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 34
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: C - 30 JUN 98 REV: B - 26 NOV 86 REV: A - 24 AUG 76 APPROVED: 26 FEB 74

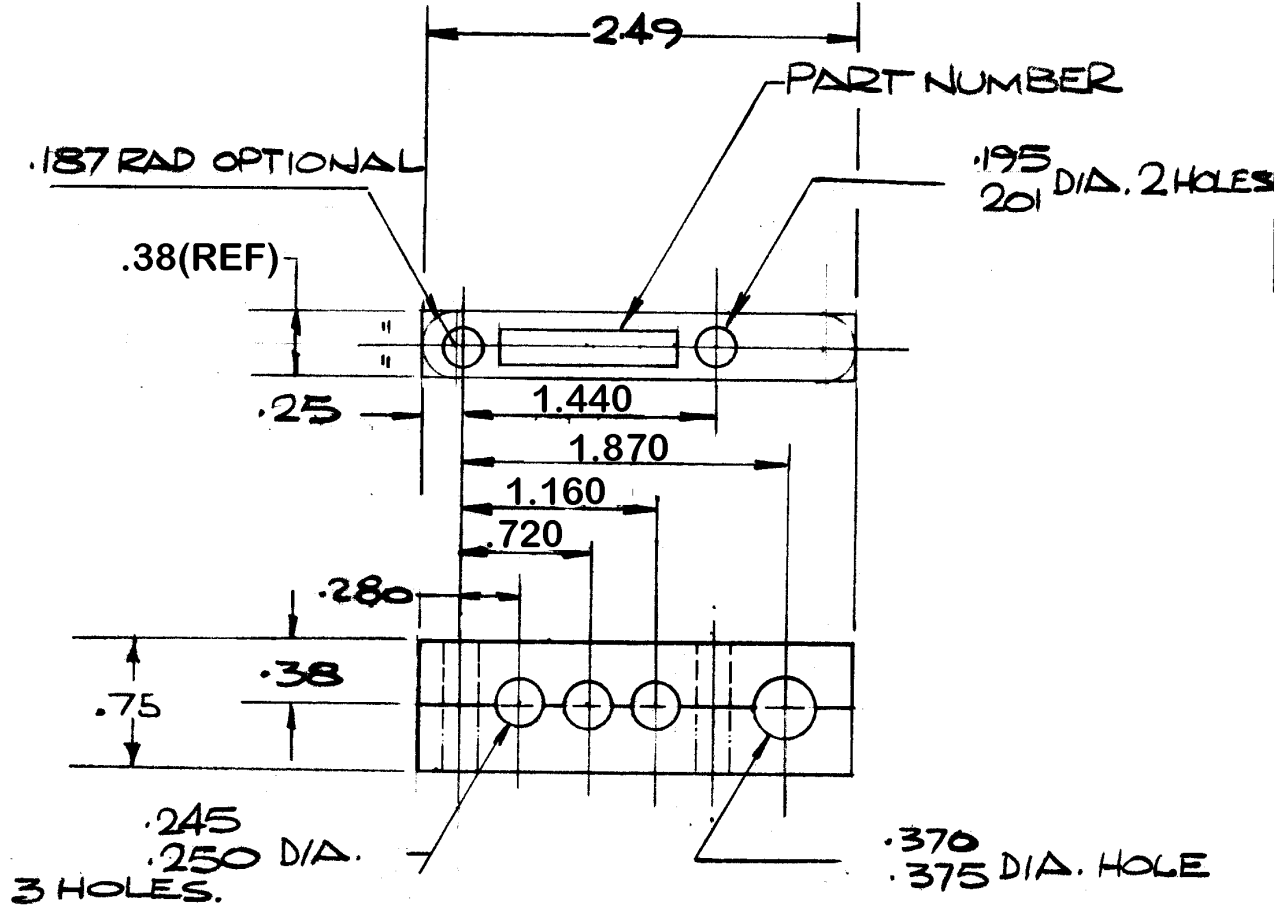

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-15
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-137 AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 35
APPROVED	S. HAMID		

© REDRAWN

REV: 26 FEB 74  
REV: A - 25 AUG 76  
REV: B - 27 NOV 86  
REV: C - 30 JUN 98  
REV: 26 FEB 74



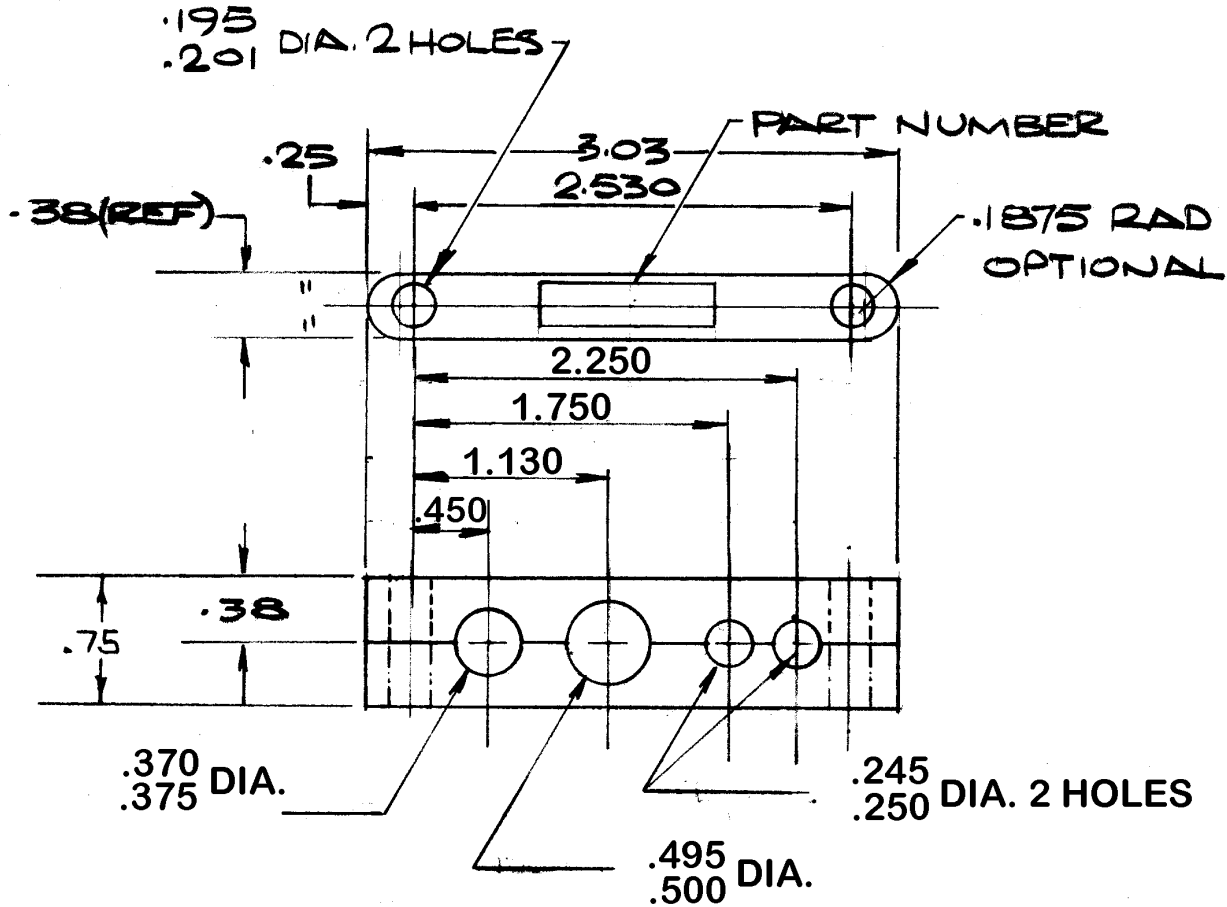

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-16
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-139 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 36
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: REV: C - 30 JUN 98 REV: B - 27 NOV 86 REV: A - 25 AUG 76 APPROVED: 26 FEB 74

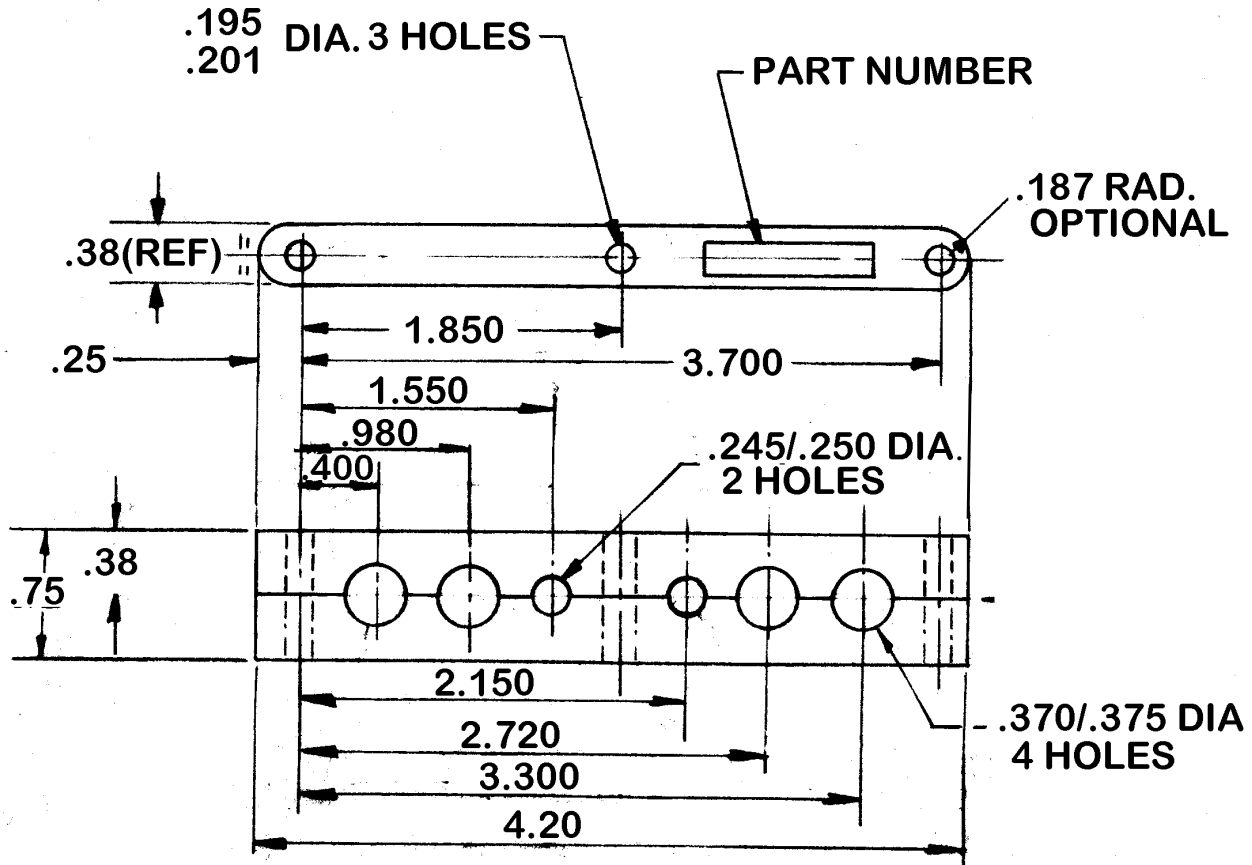

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-18
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-141 AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 37
APPROVED	S. HAMID		

REDRAWN

REV: D - 30 JUN 98  
REV: C - 27 NOV 86  
REV: B - 31 JAN 79  
REV: A - 25 AUG 76  
APPROVED: 26 FEB 74

APPROVED: 26 FEB 74	REV: A - 23 APR 74	REV: B - 25 AUG 76	REV: C - 26 NOV 86	REV: D - 30 JUN 98	REV:
---------------------	--------------------	--------------------	--------------------	--------------------	------

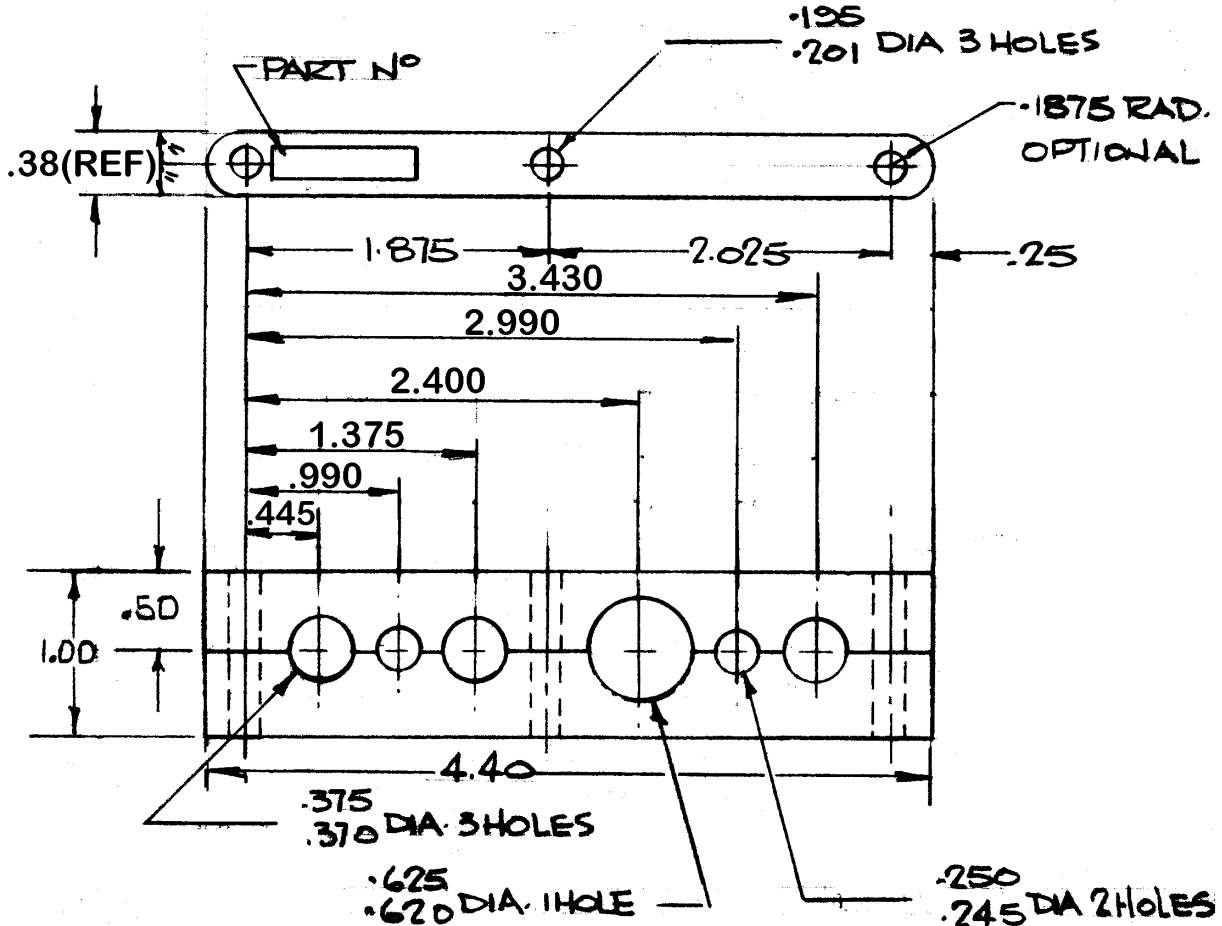

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-12
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-147 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 39
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: C - 30 JUN 98 REV: B - 27 NOV 86 REV: A - 24 AUG 76 APPROVED: 26 FEB 74

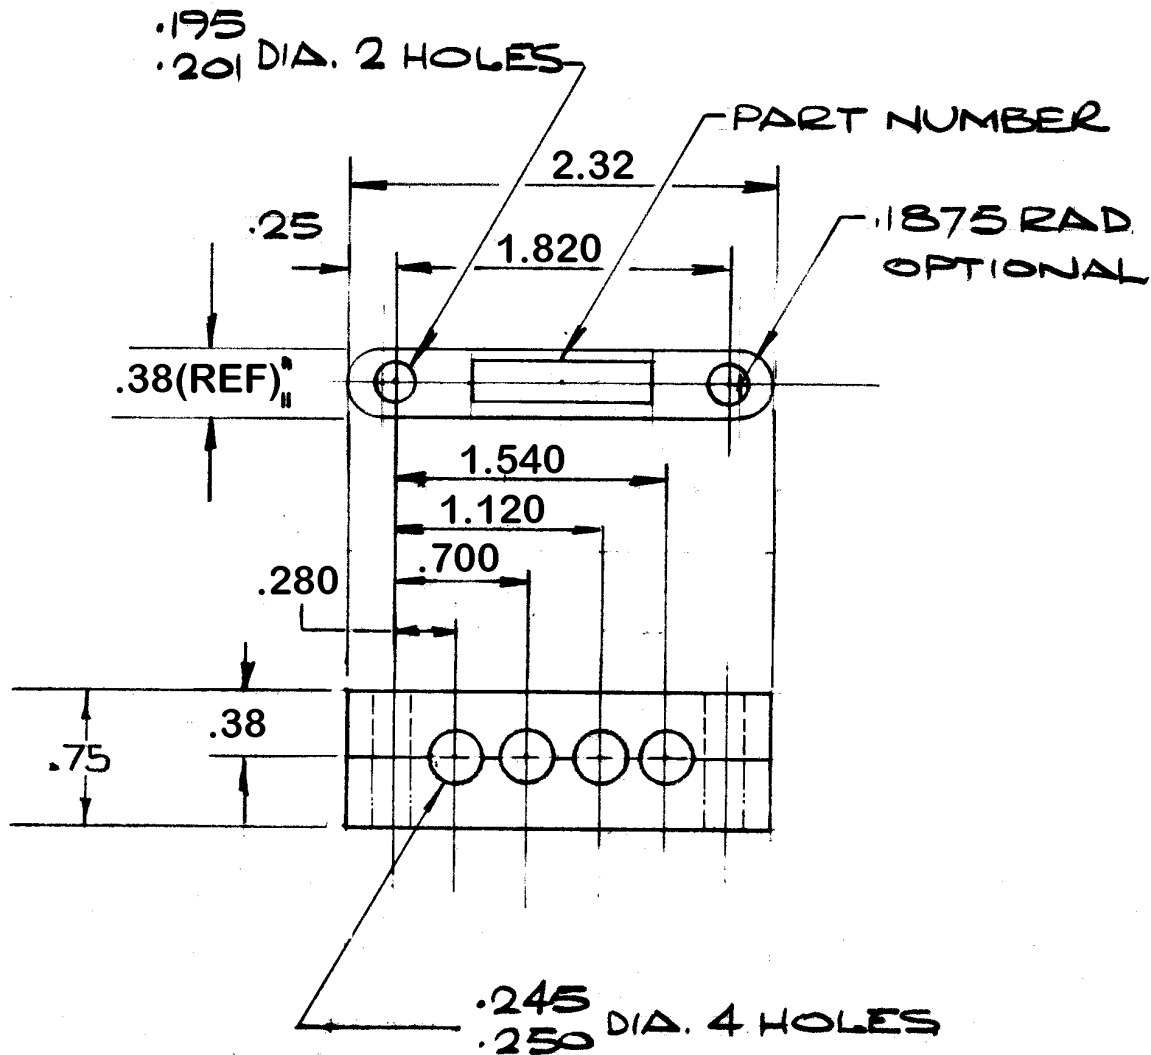

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-17
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-149 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 40
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: REV: C - 30 JUN 98 REV: B - 27 NOV 86 REV: A - 24 AUG 76 APPROVED: 26 FEB 74

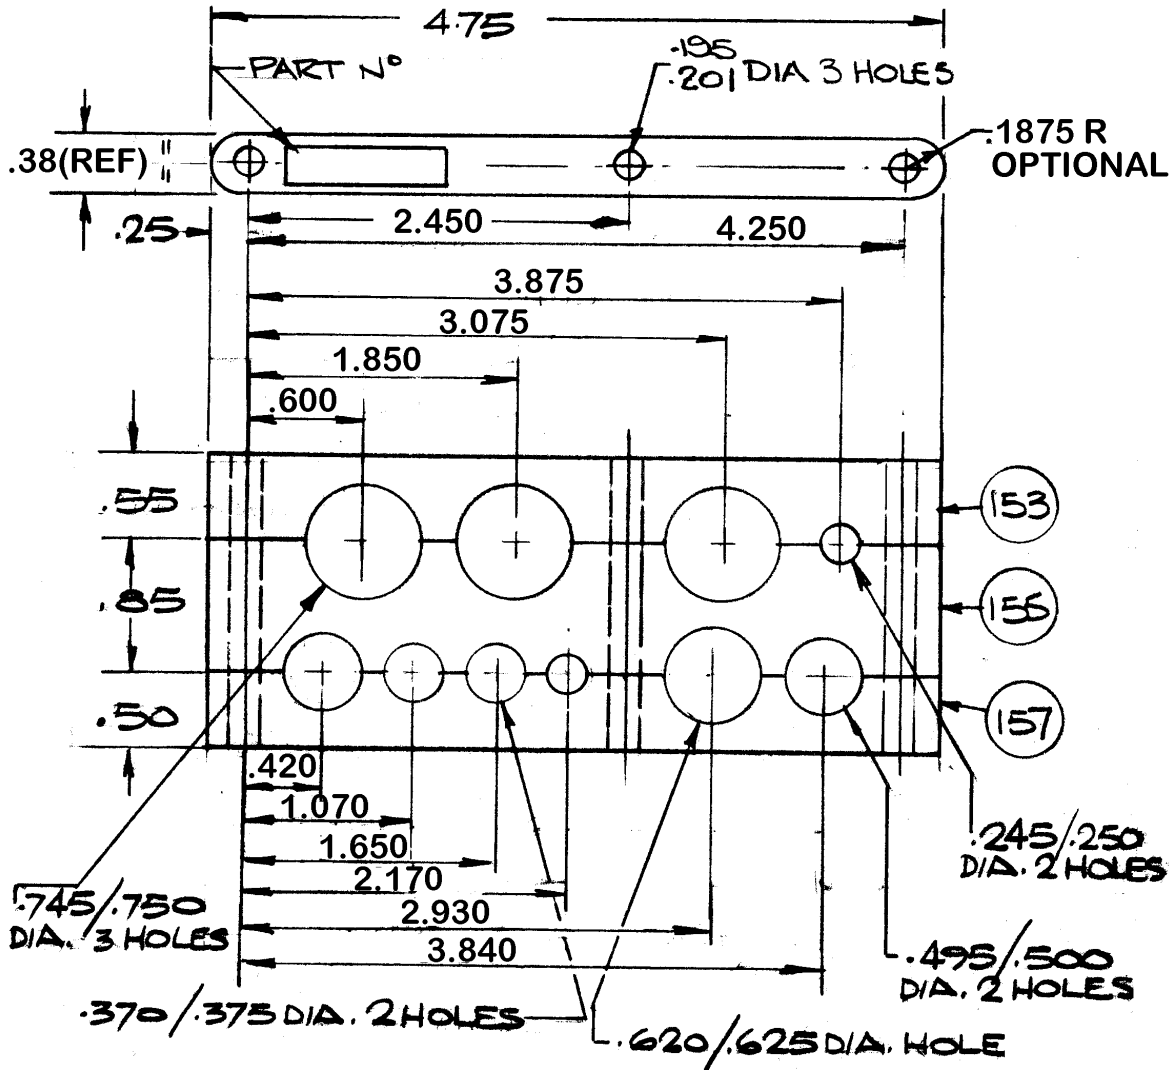

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-14
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-151** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 41
APPROVED	S. HAMID		

REDRAWN

REV: REV: REV: REV: REV: B - 30 JUN 98 REV: A - 24 AUG 76 REV: 26 FEB 74

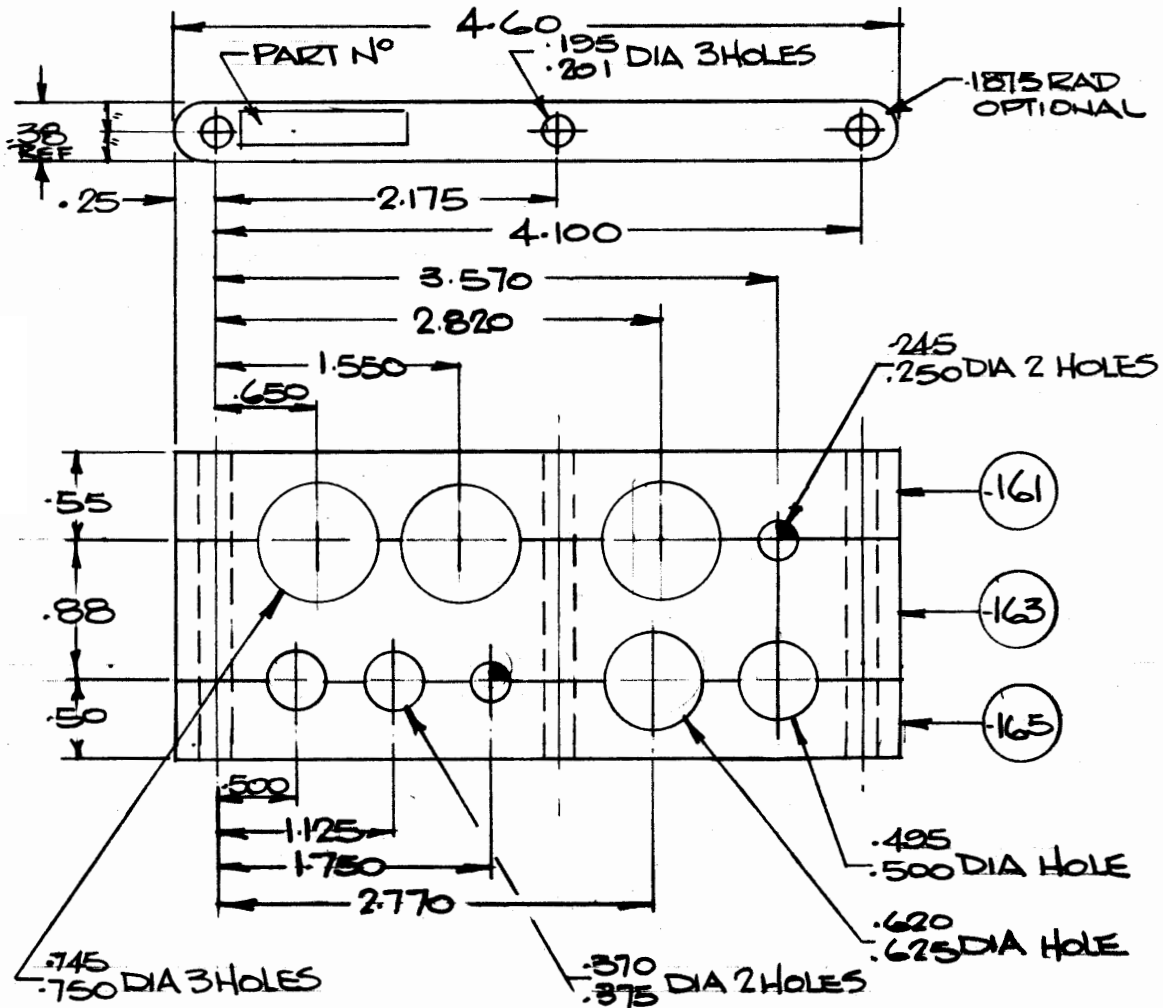

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-19
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-159** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 42
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: C - 30 JUN 98 REV: B - 24 AUG 76 REV: A - 30 MAY 74 APPROVED: 12 MAR 74

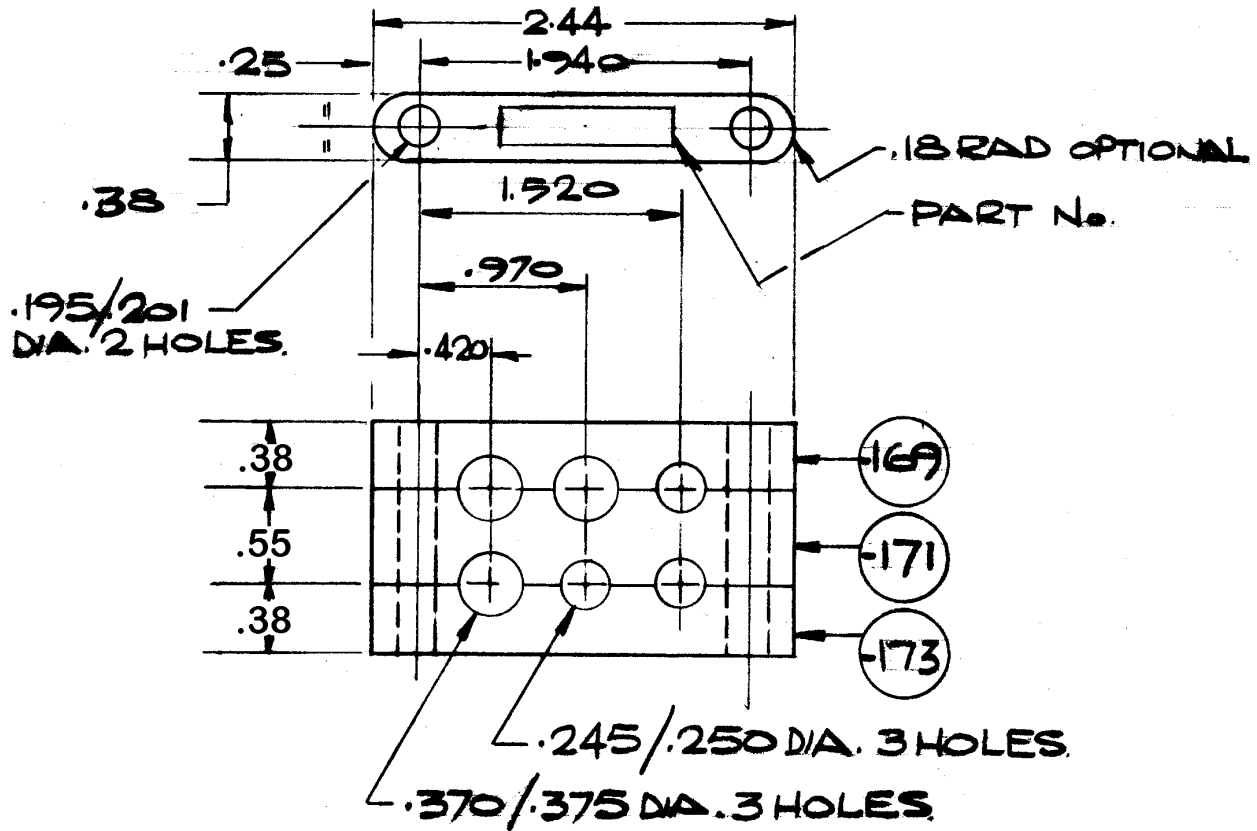

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-5
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-167** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 43
APPROVED	S. HAMID		

REDRAWN

REV:

REV:

REV:


REV:

REV: B - 30 JUN 98

REV: A - 25 AUG 76

APPROVED: 1 APR 74



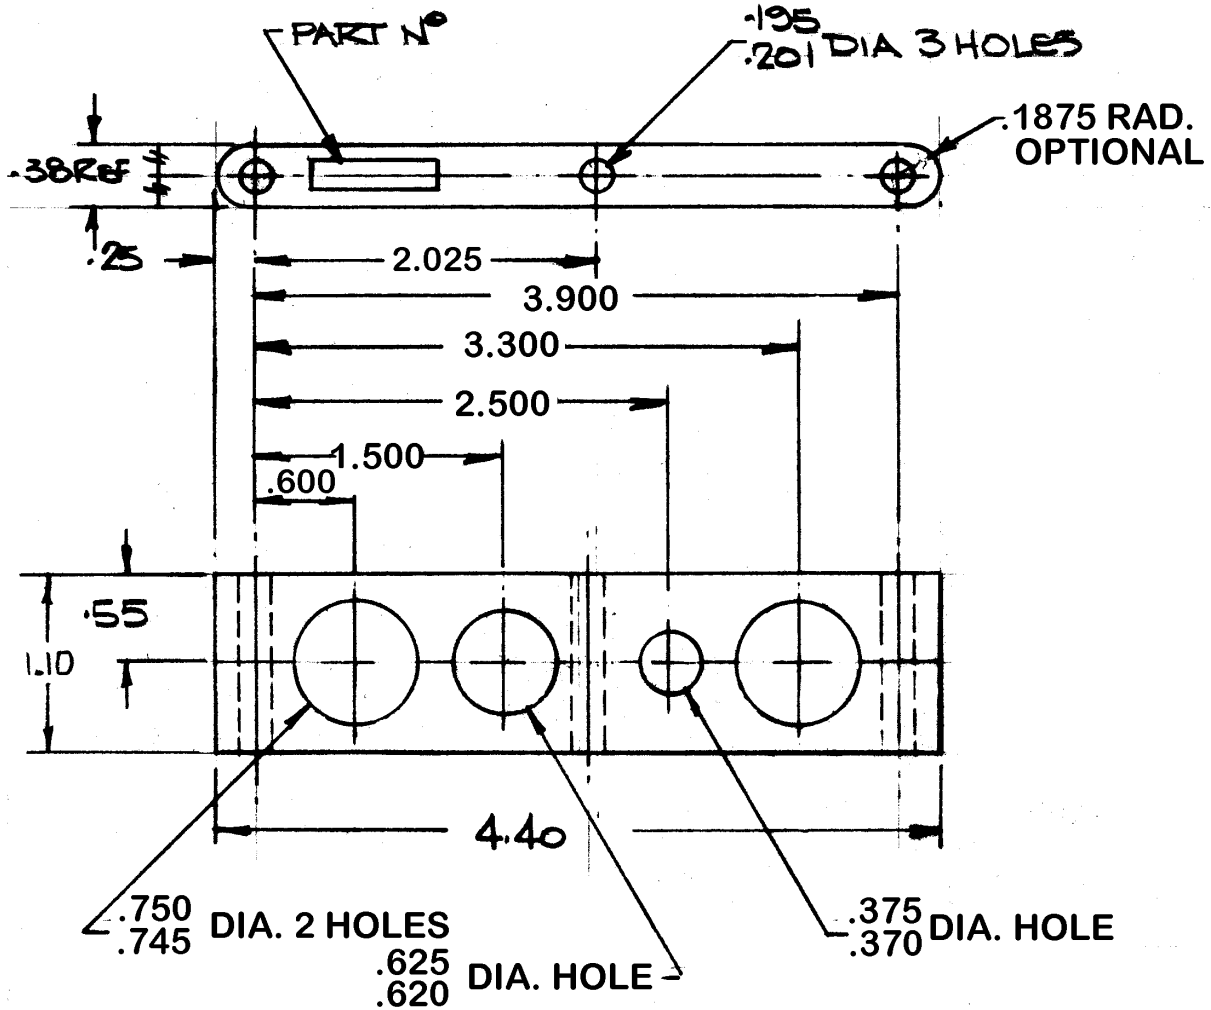

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-12
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-175 AS DRAWN**

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 44
APPROVED	S. HAMID		

© REDRAWN

REV: REV: REV: C - 30 JUN 98 REV: B - 27 NOV 86 REV: A - 25 AUG 76 APPROVED: 30 MAY 74

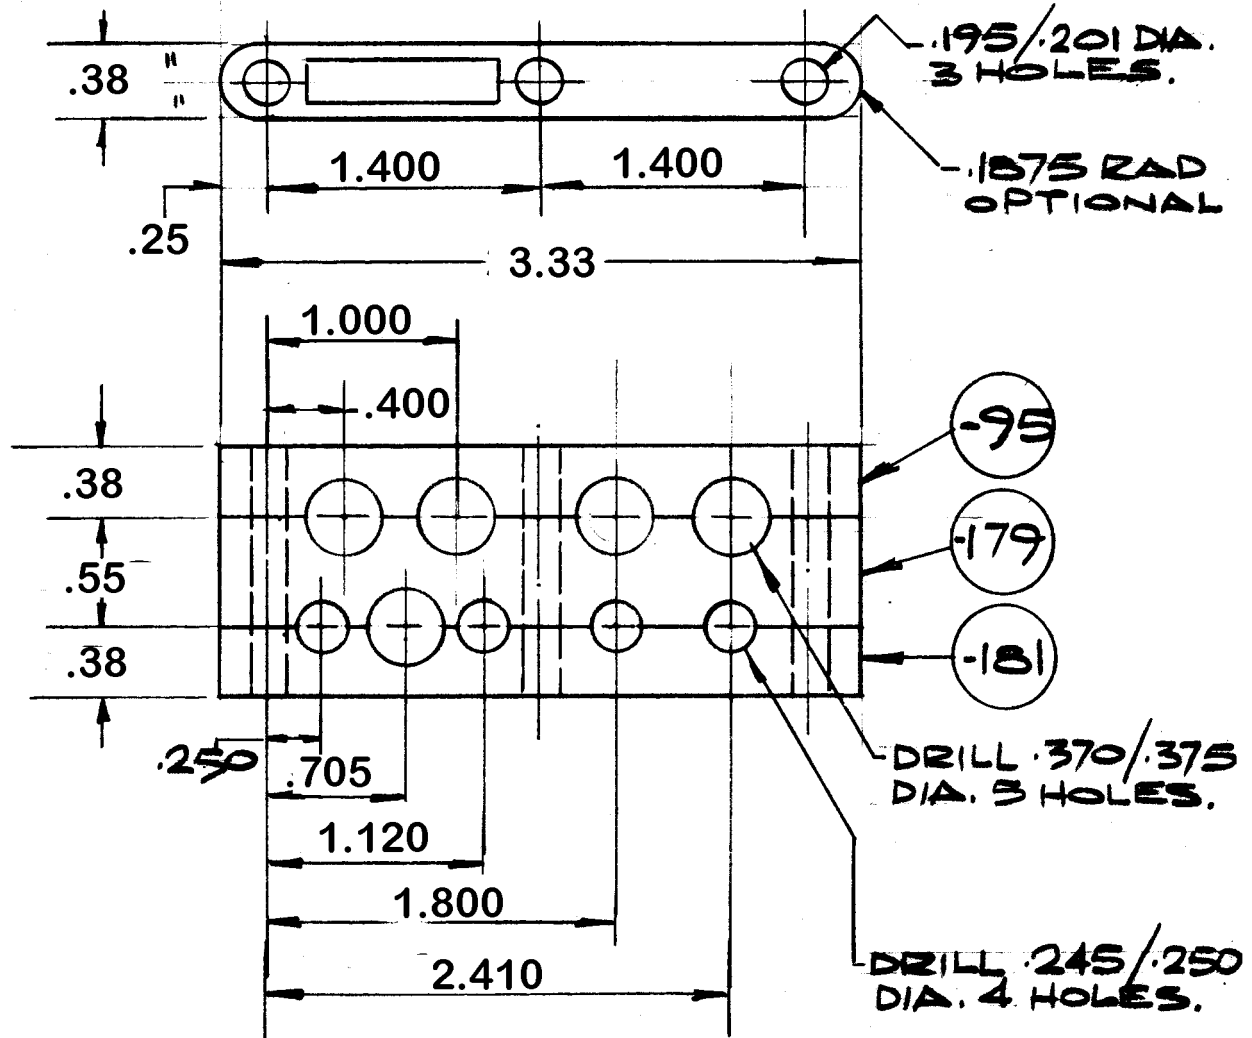

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-7
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-177 AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 45
APPROVED	S. HAMID		

REDRAWN

REV: REV: REV: REV: REV: B - 30 JUN 98 REV: A - 25 AUG 76 APPROVED: 24 JUN 74

VED: :

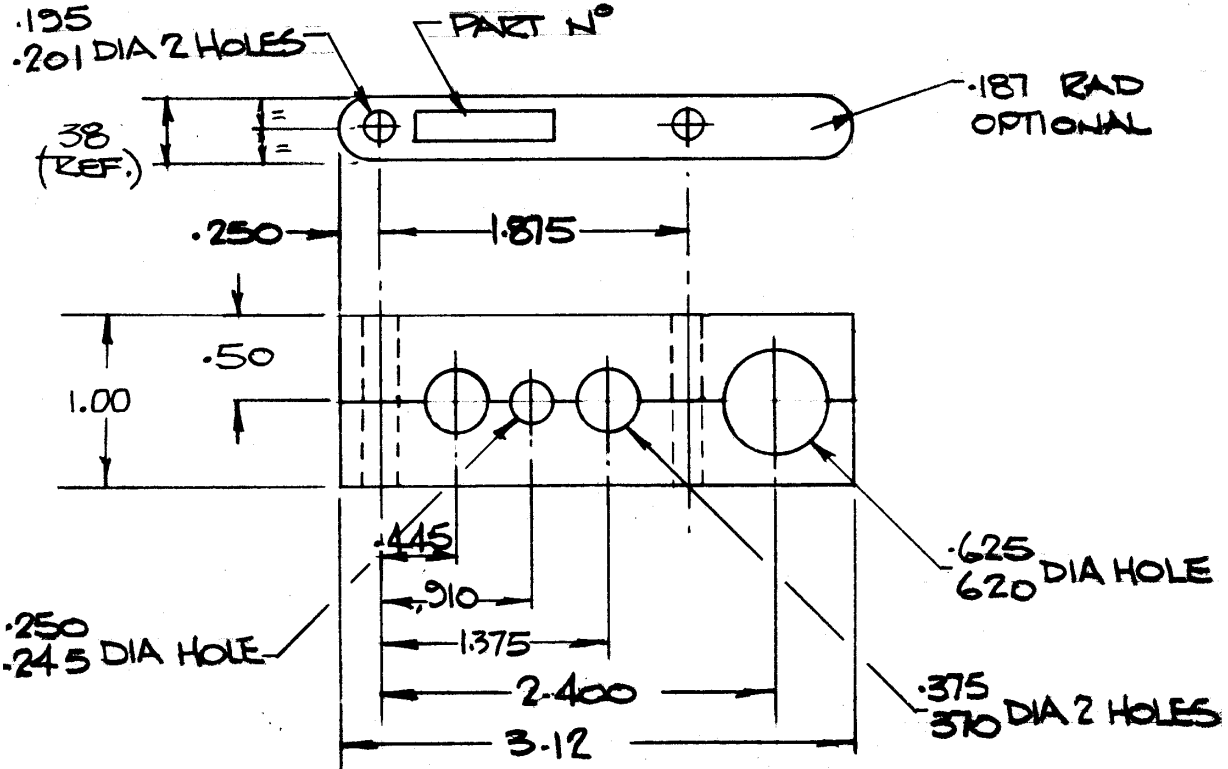

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-27
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-185 AS DRAWN**

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID


**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 47

© REDRAWN

REV: 12 SEP 74  
REV: A - 25 AUG 76  
REV: B - 27 NOV 86  
REV: C - 30 JUN 98  
REV: 12 SEP 74

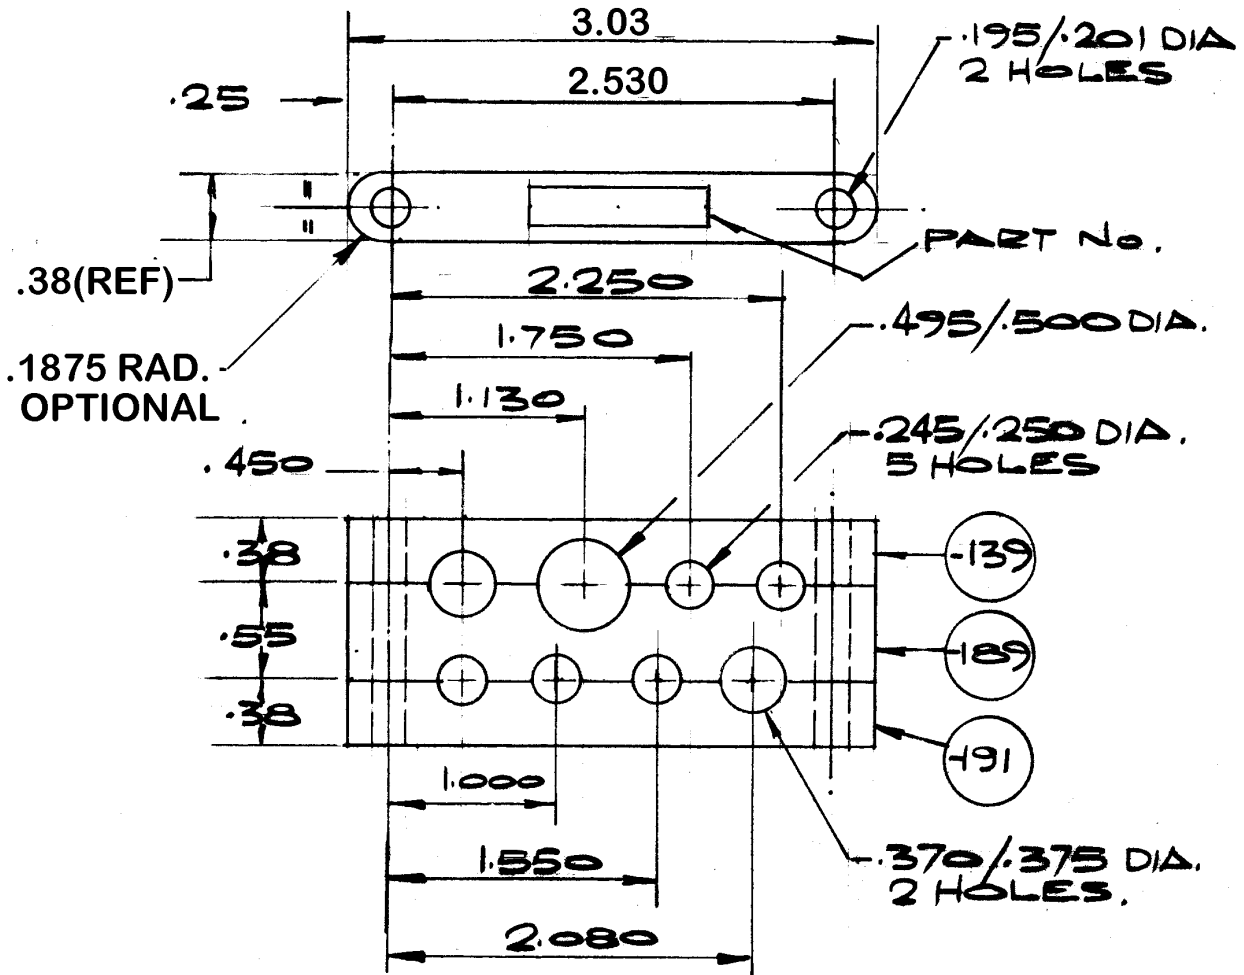

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-16
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


-187 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 48
APPROVED	S. HAMID		

REDRAWN

REV: REV: REV: REV: REV: B - 30 JUN 98 REV: A - 25 AUG 76 REV: 8 SEP 74

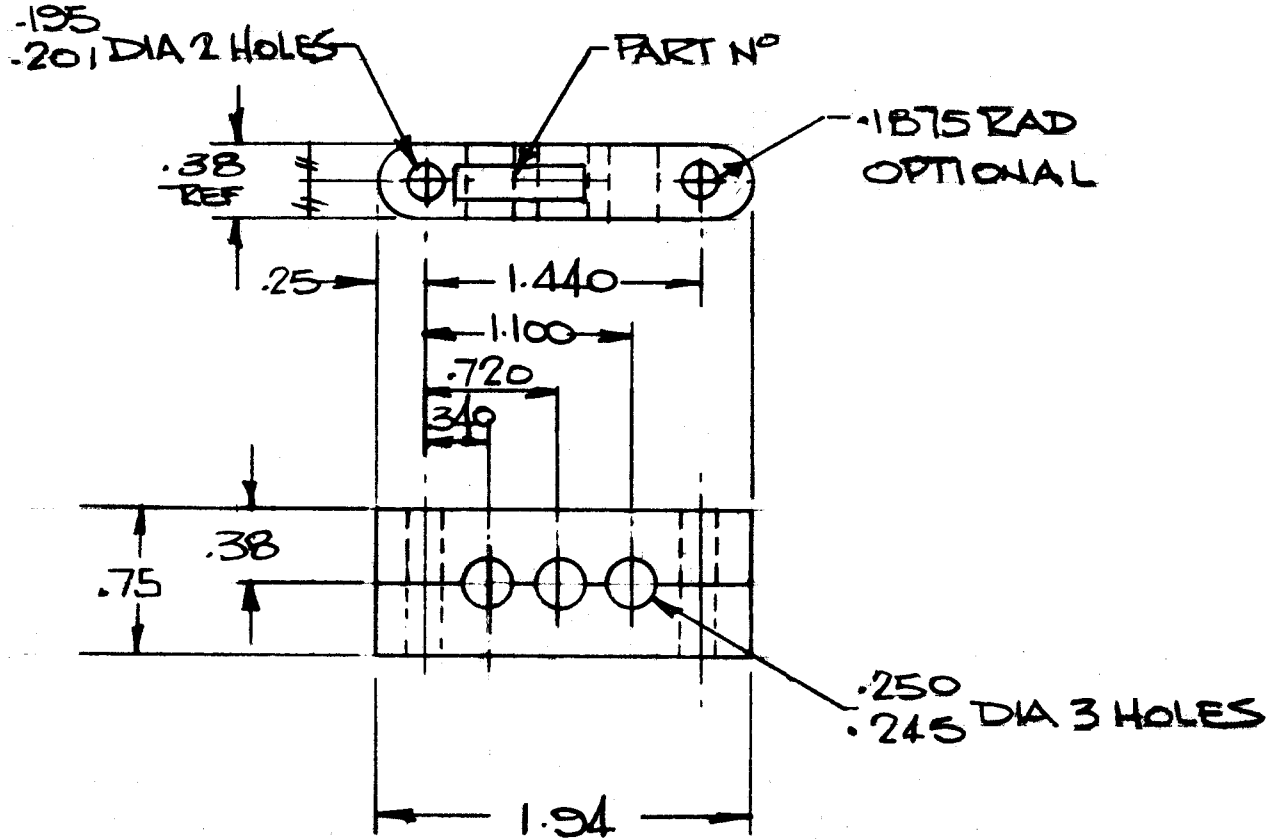

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS:  $\cdot 0.02$  RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm \cdot 0.010$
5. USE WITH CHANNEL SUPPORT CSP313-4
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-193** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 49

© REDRAWN

REV:

REV:


REV:

REV: C - 30 JUN 98

REV: B - 27 NOV 86

REV: A - 25 AUG 76

APPROVED: 8 SEP 74

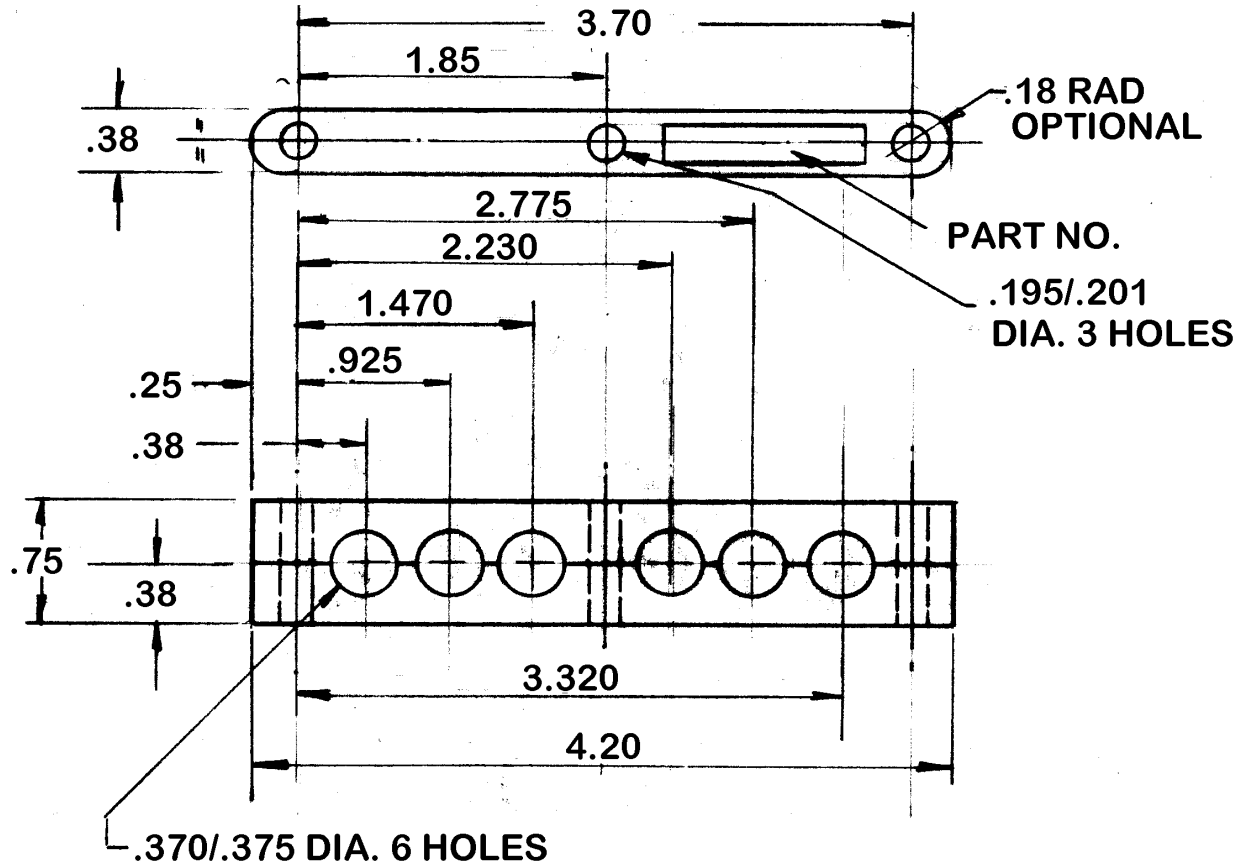

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-18
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-195 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID


**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 50

REDRAWN

REV: REV: REV: REV: B - 30 JUN 98 REV: A - 25 AUG 76 APPROVED: 26 NOV 75

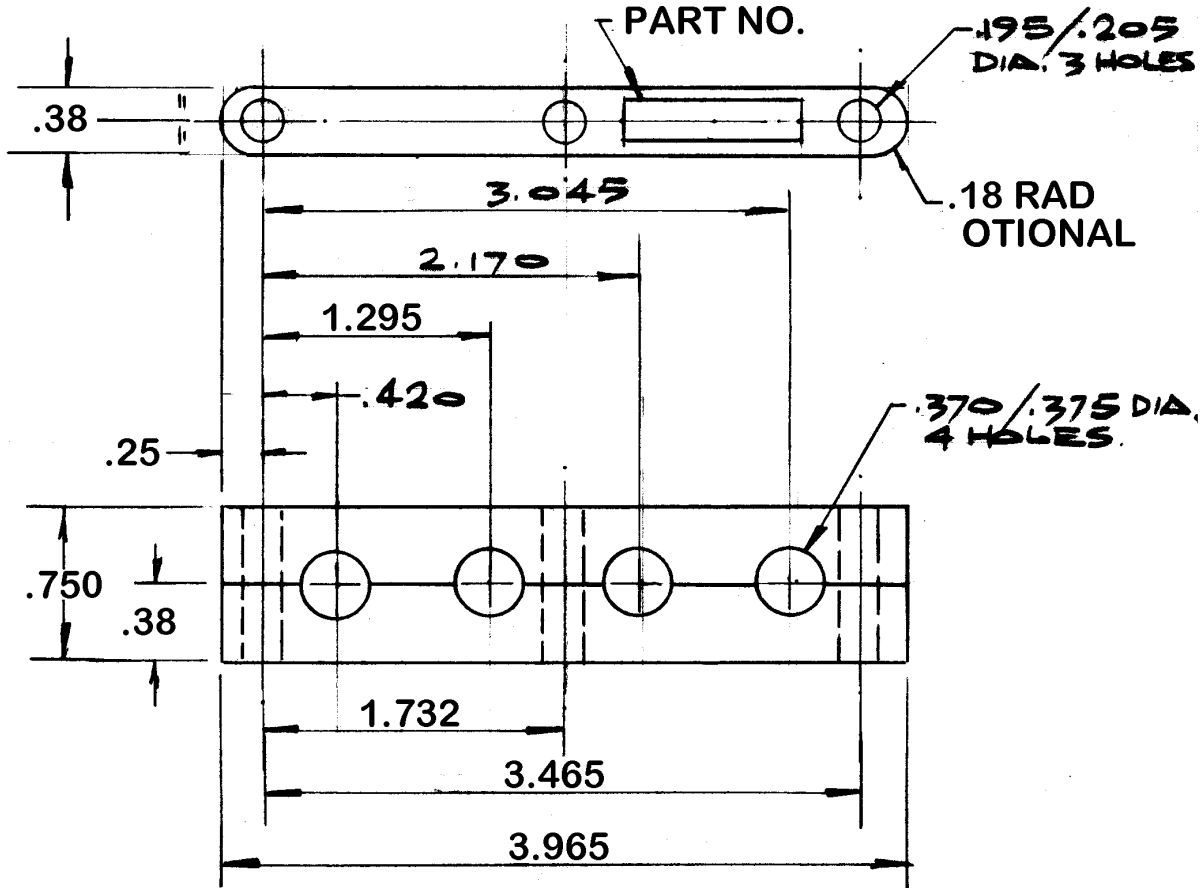

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-29
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

(-197) AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY


DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 51
APPROVED	S. HAMID		

REDRAWN

REV: REV: REV: REV: B - 30 JUN 98 REV: A - 25 AUG 76 REV: 26 NOV 75



## APPR

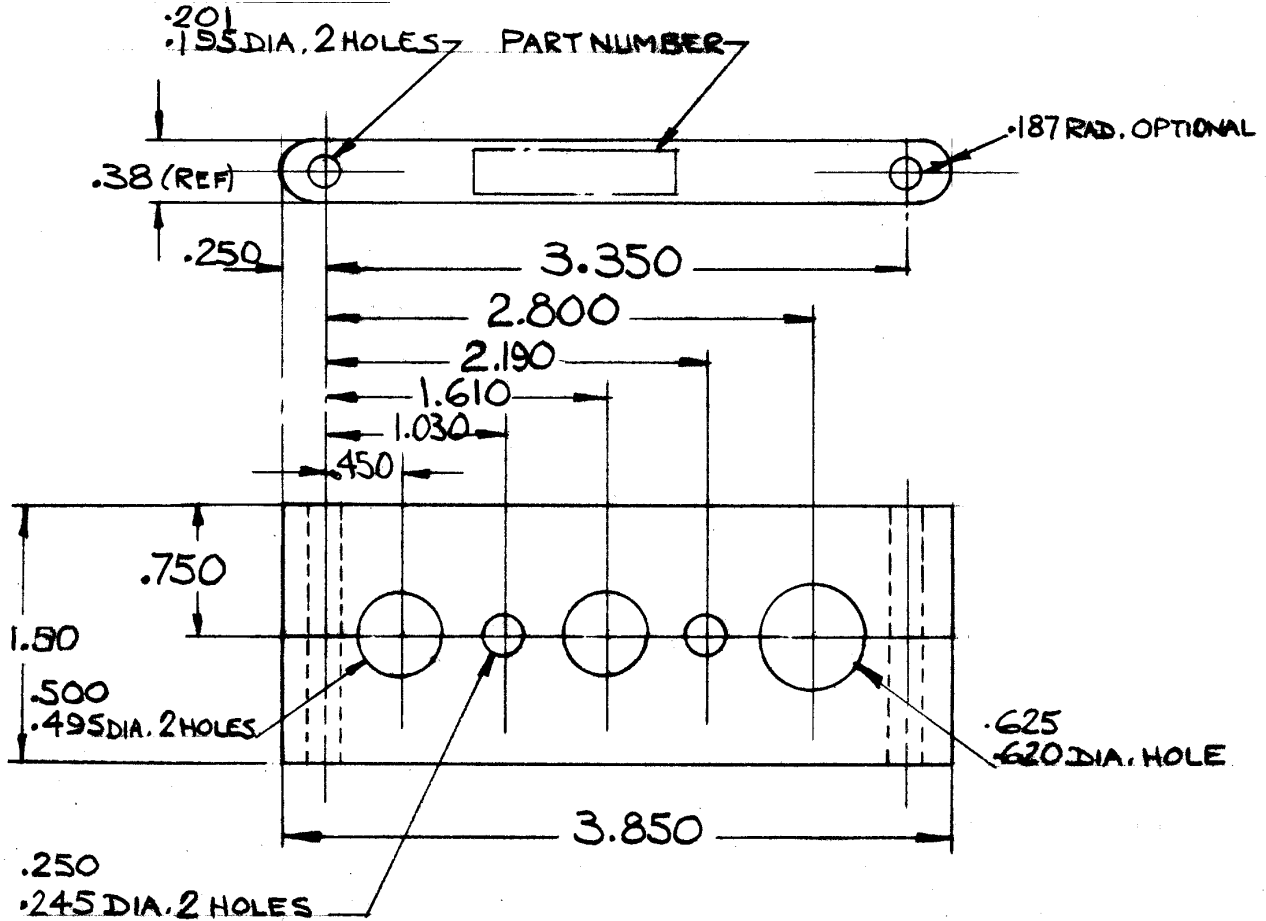

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT 72970028-101
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-201** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 53
APPROVED	S. HAMID		

REDRAWN

REV:

REV:


REV:

REV:

REV: B - 30 JUN 98

REV: A - 27 NOV 86

APPROVED: 25 JAN 77

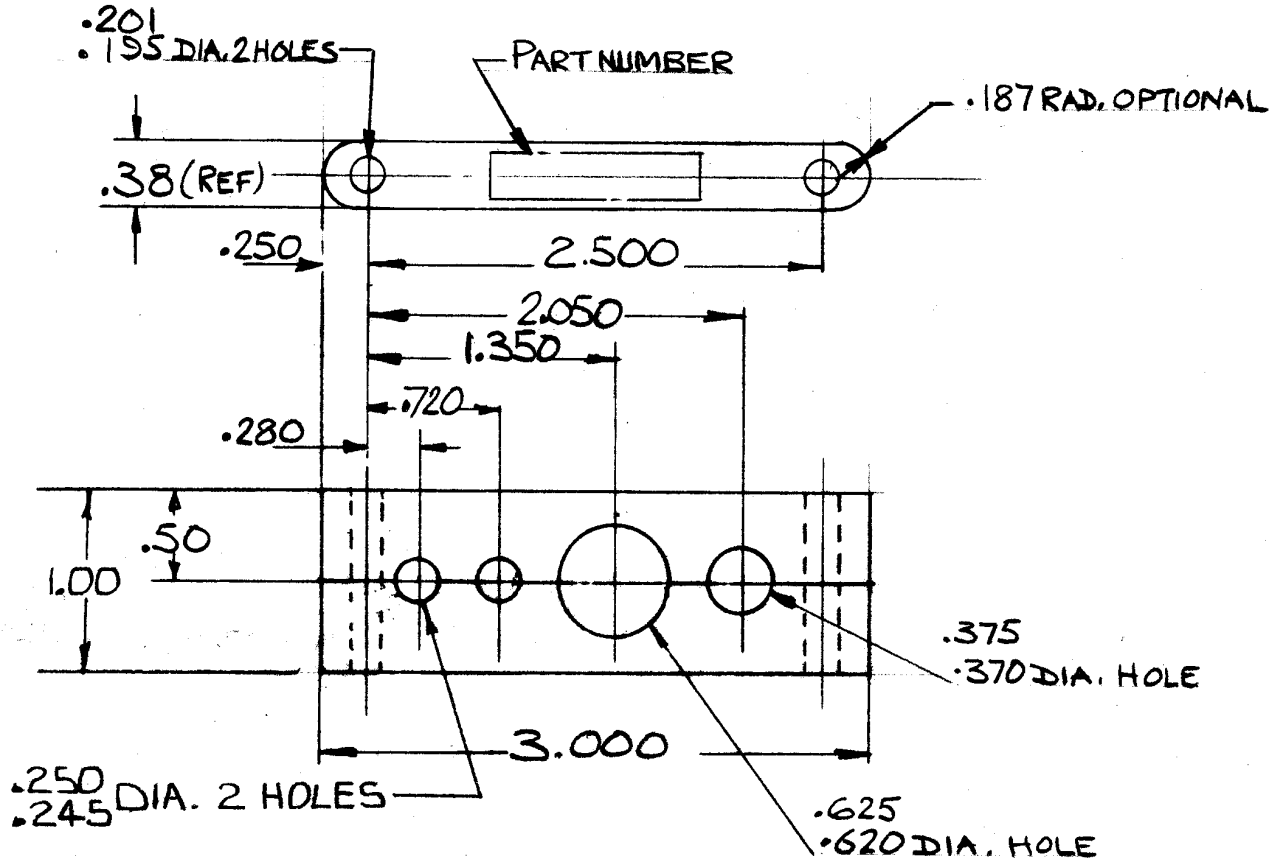

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-33
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-203** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 54

REDRAWN

REV:

REV:

REV:

REV:

REV: B - 30 JUN 98


REV: A - 27 NOV 86

APPROVED: 25 JAN 77

APPF

APPROVED: 25 JAN 77



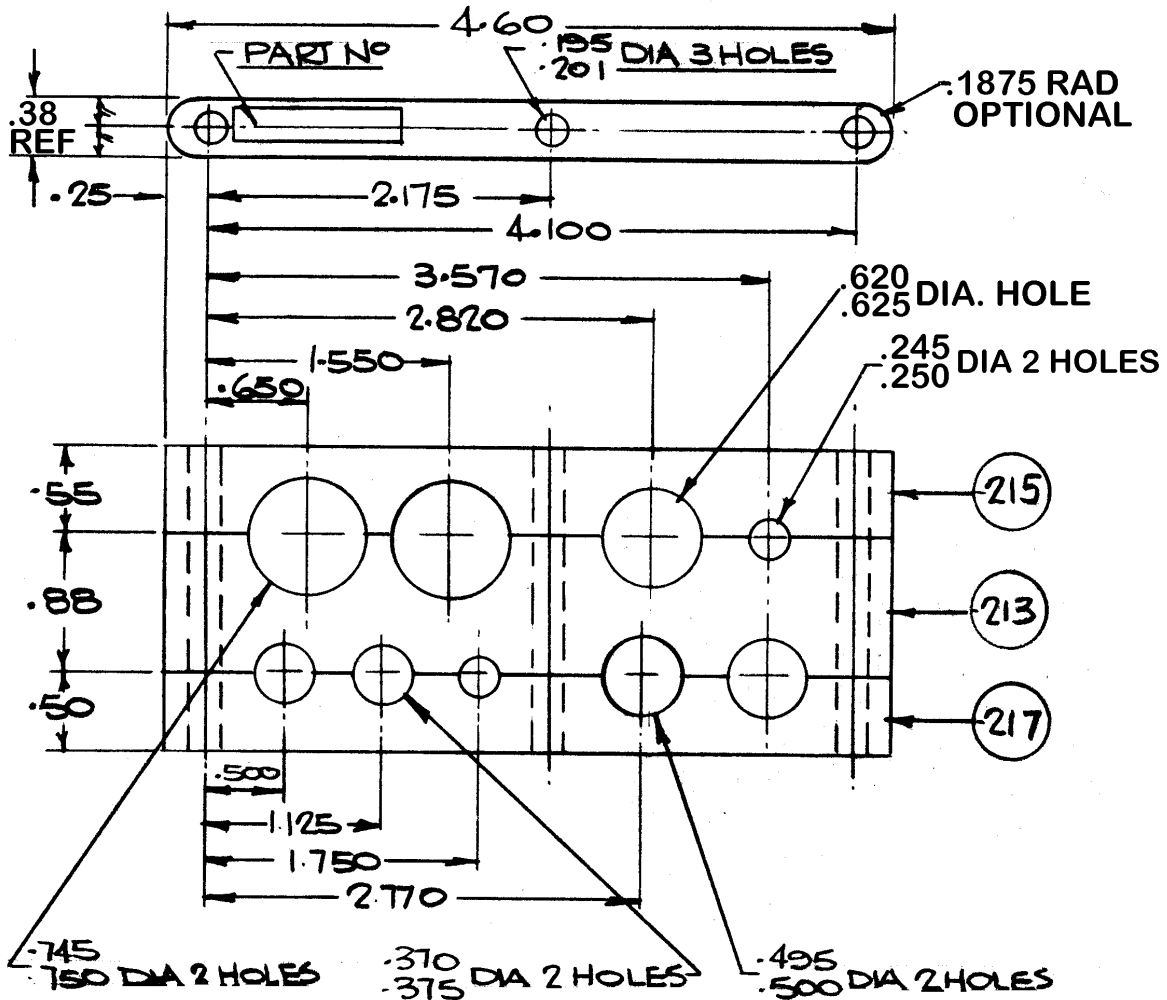

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-19
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-211** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 58
APPROVED	S. HAMID		

Ⓐ REDRAWN

REV: REV: REV: REV: REV: REV: REV: A - 30 JUN 98 REV: 25 JAN 77

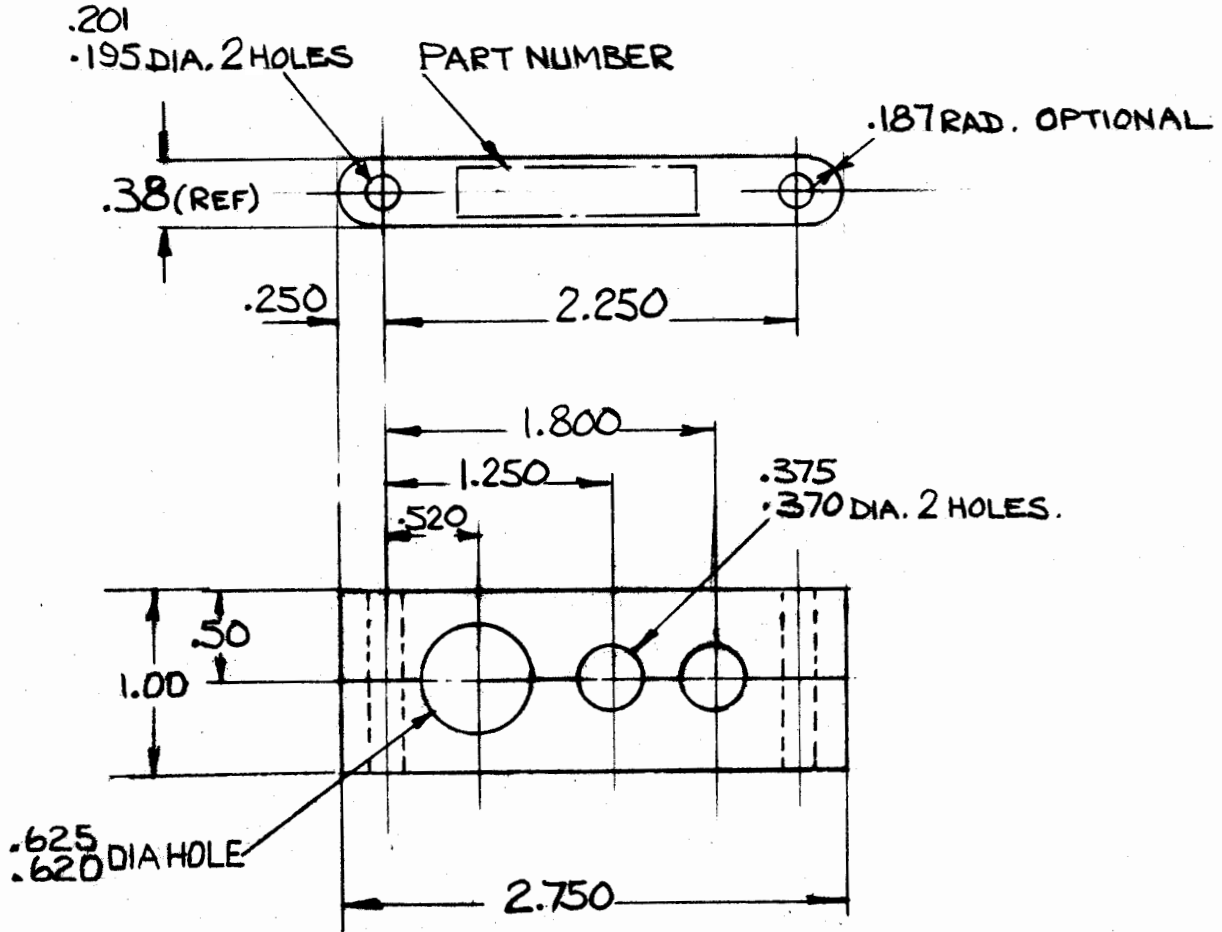

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-31
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-219** AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 59
APPROVED	S. HAMID		

REDRAWN

REV: REV: REV: REV: B - 30 JUN 98 REV: A - 27 NOV 86 APPROVED: 25 JAN 77



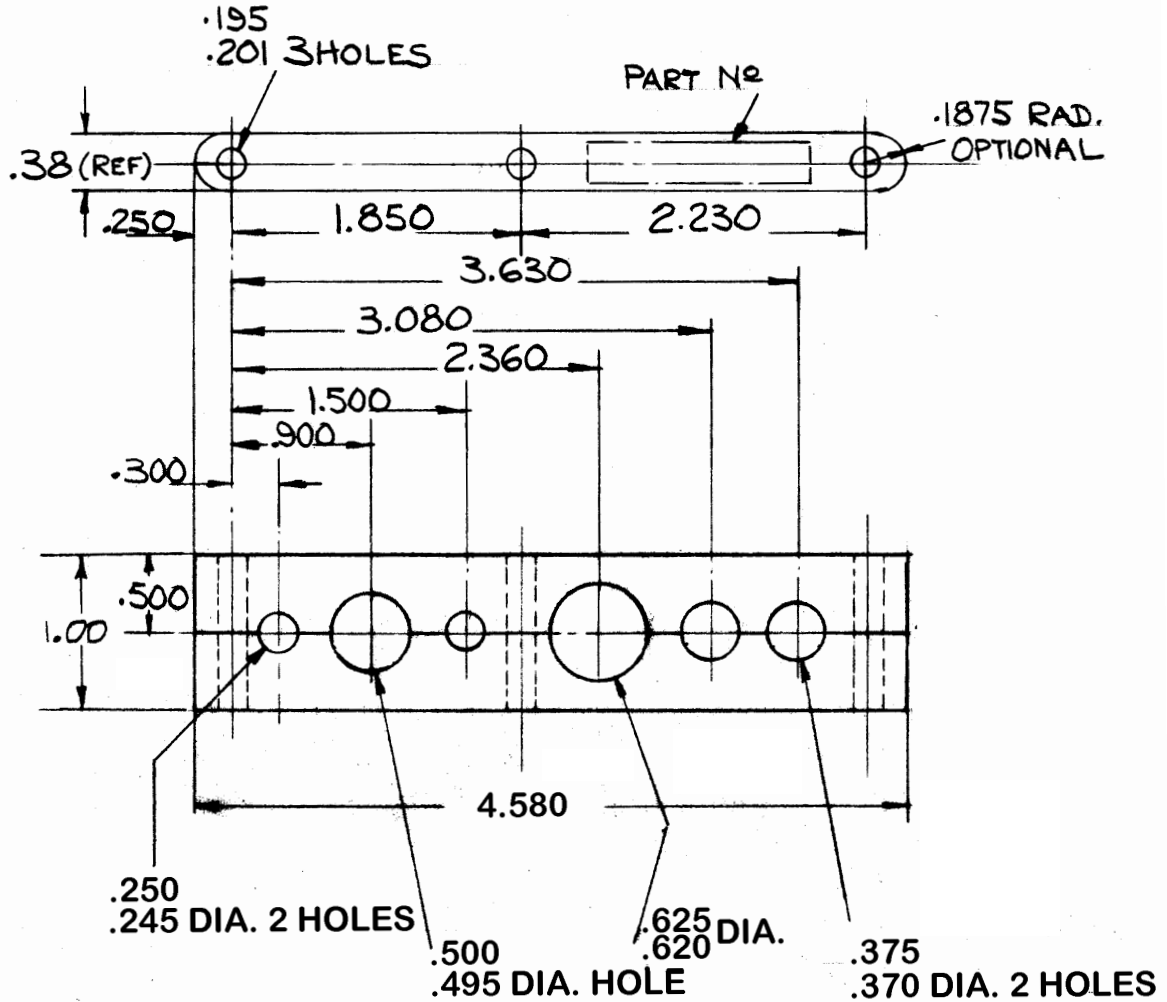

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-30
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-221 AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 60
APPROVED	S. HAMID		

REDRAWN

REV: REV: REV: REV: REV: REV: A - 27 NOV 86 REV: B - 30 JUN 98 REV: 25 JAN 77

APPROVED: 25 JAN 77	REV: A - 27 NOV 86	REV: B - 30 JUN 98	REV:	REV:
---------------------	--------------------	--------------------	------	------

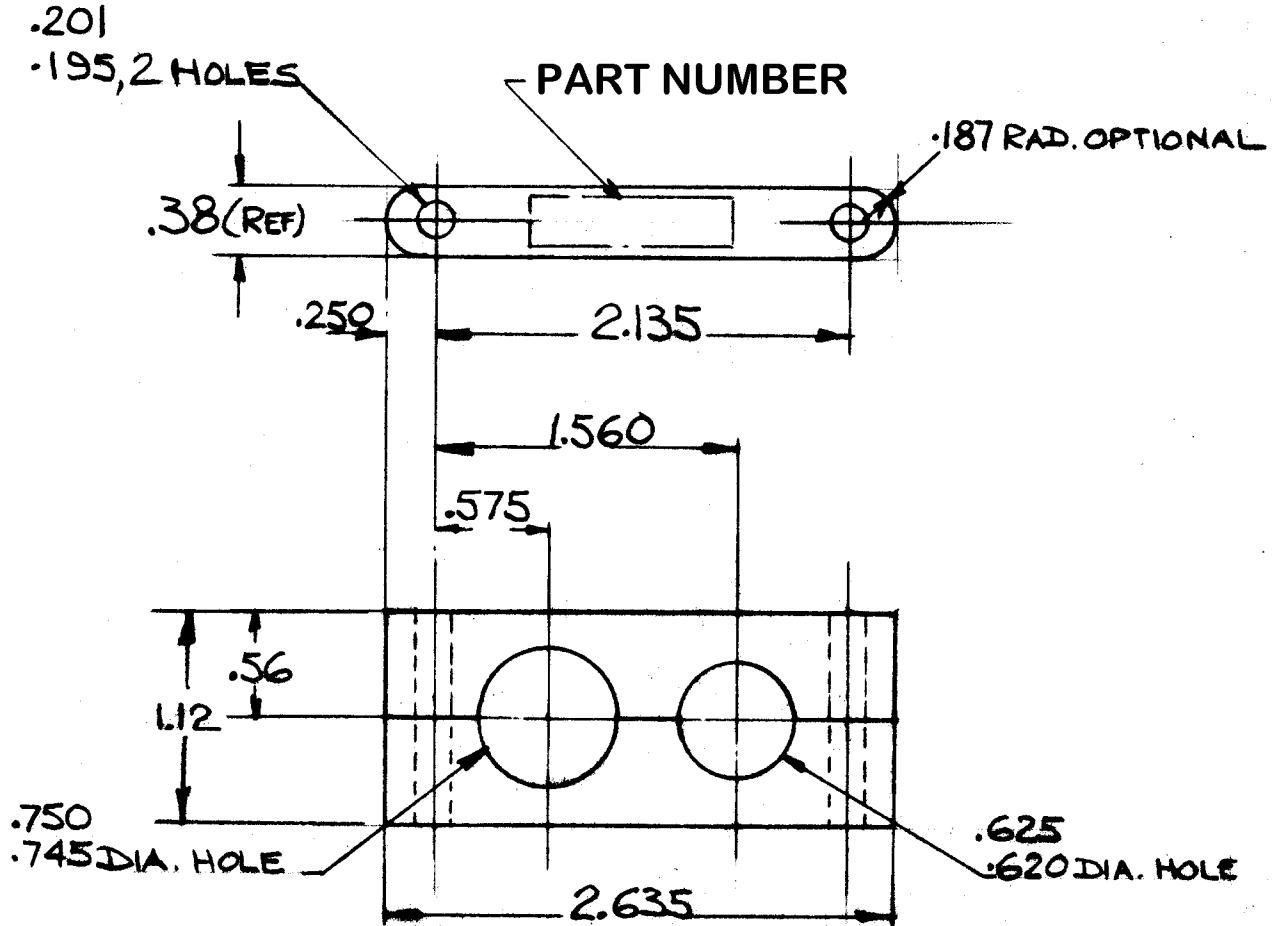

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-32
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-225** AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 62
APPROVED	S. HAMID		

REDRAWN

REV: 25 JAN 77  
REV: A - 27 NOV 86  
REV: B - 30 JUN 98  
REV: 25 JAN 77



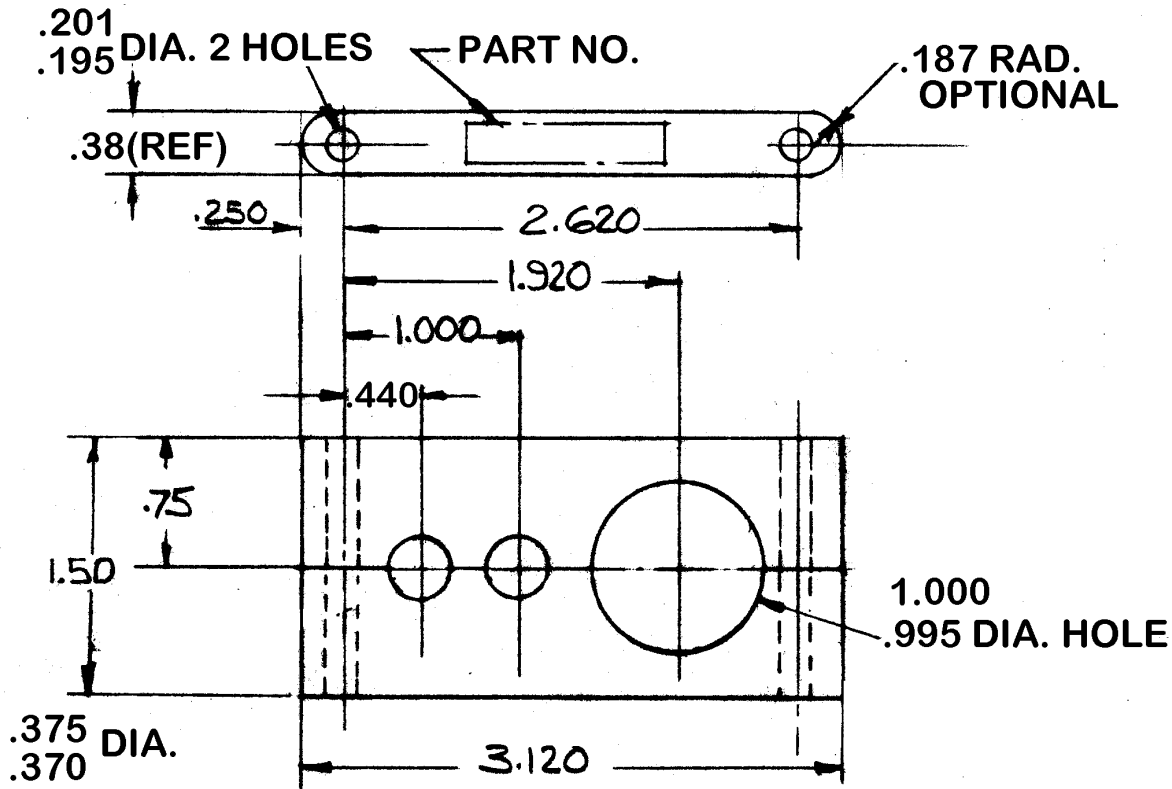

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT 72970028-101
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-229 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY


DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 64
APPROVED	S. HAMID		

REDRAWN

REV: 25 JAN 77  
REV: A - 27 NOV 86  
REV: B - 30 JUN 98  
REV: 25 JAN 77

APPROVED: 25 JAN 77

APPROVED: 25 JAN 77	REV: A - 28 NOV 86	REV: B - 30 JUN 98	REV:	REV:
---------------------	--------------------	--------------------	------	------

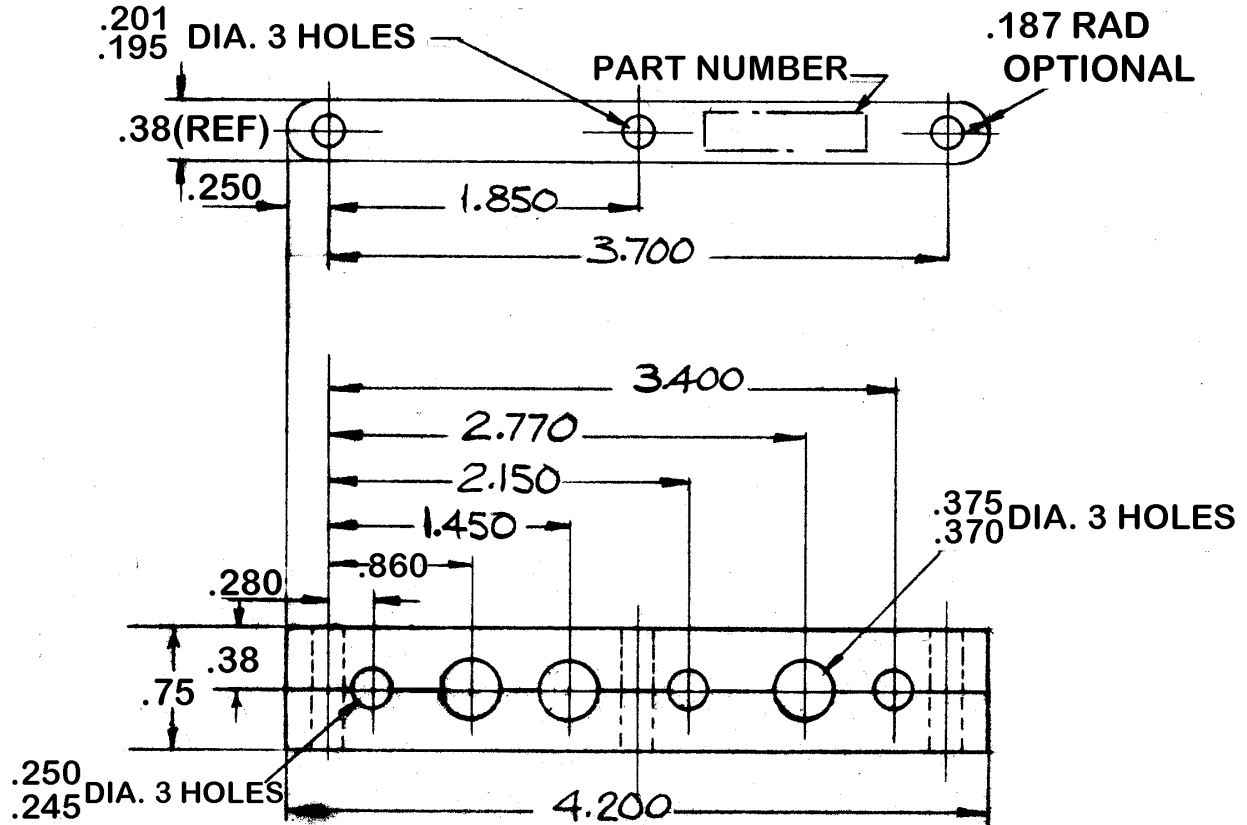

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-18
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-235 AS  
DRAWN**


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: <b>67</b>
APPROVED	S. HAMID		

REDRAWN

REV: REV: REV: REV: B - 30 JUN 98 REV: A - 28 NOV 86 APPROVED: 25 JAN 77



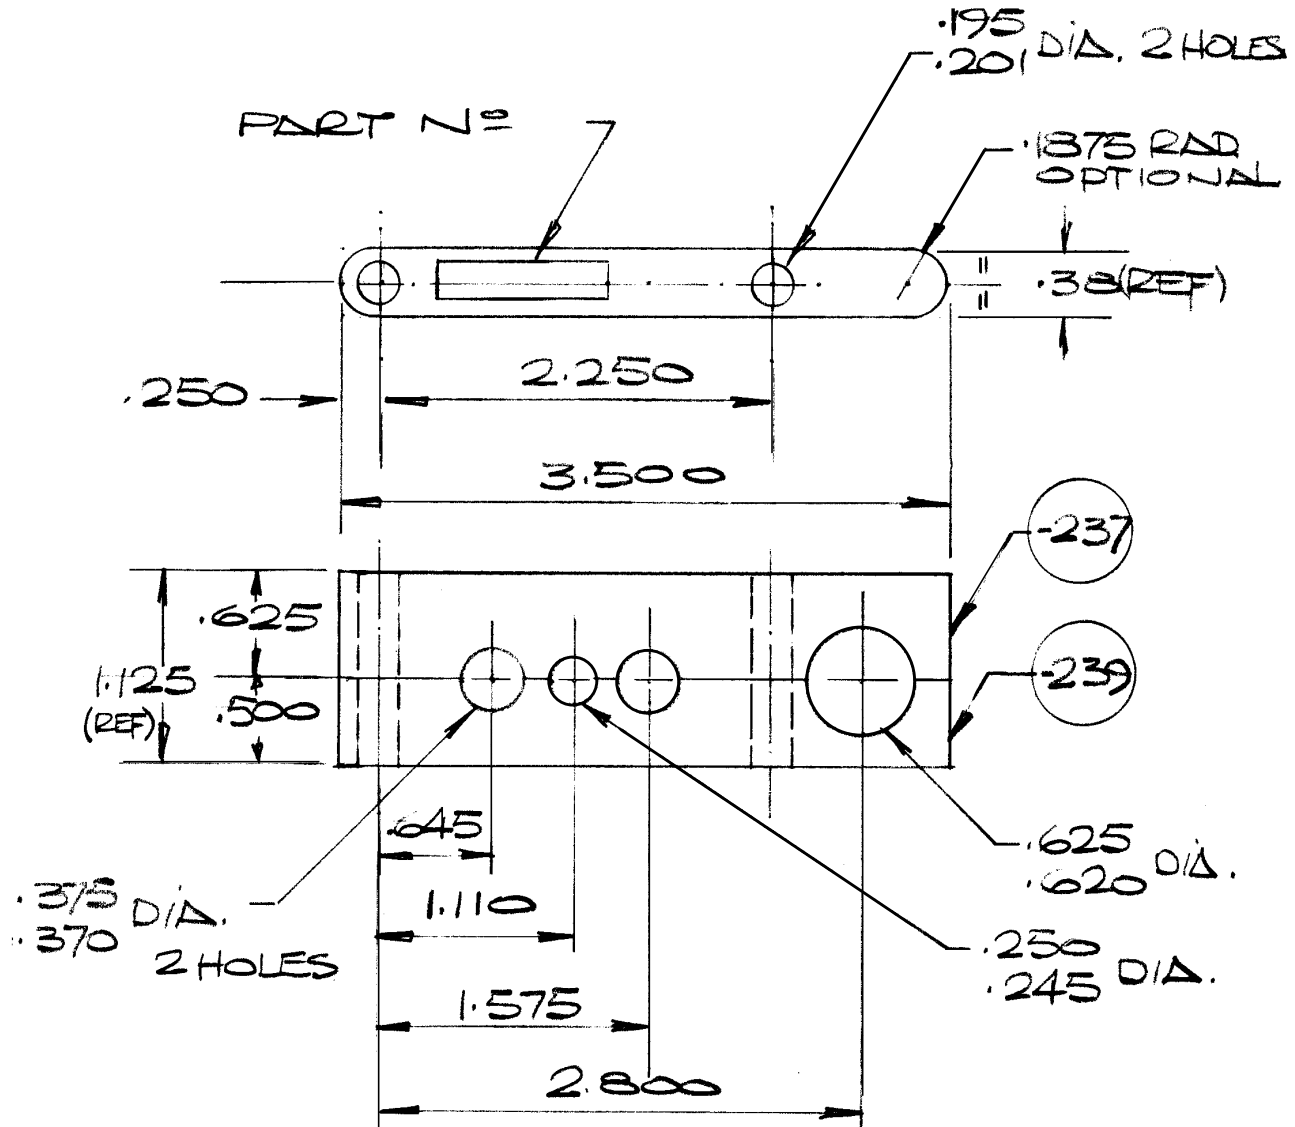

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-34
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-241 AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 68
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: A - 30 JUN 98 REV: 1 SEP 79 APPROVED:

**(B) REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED**

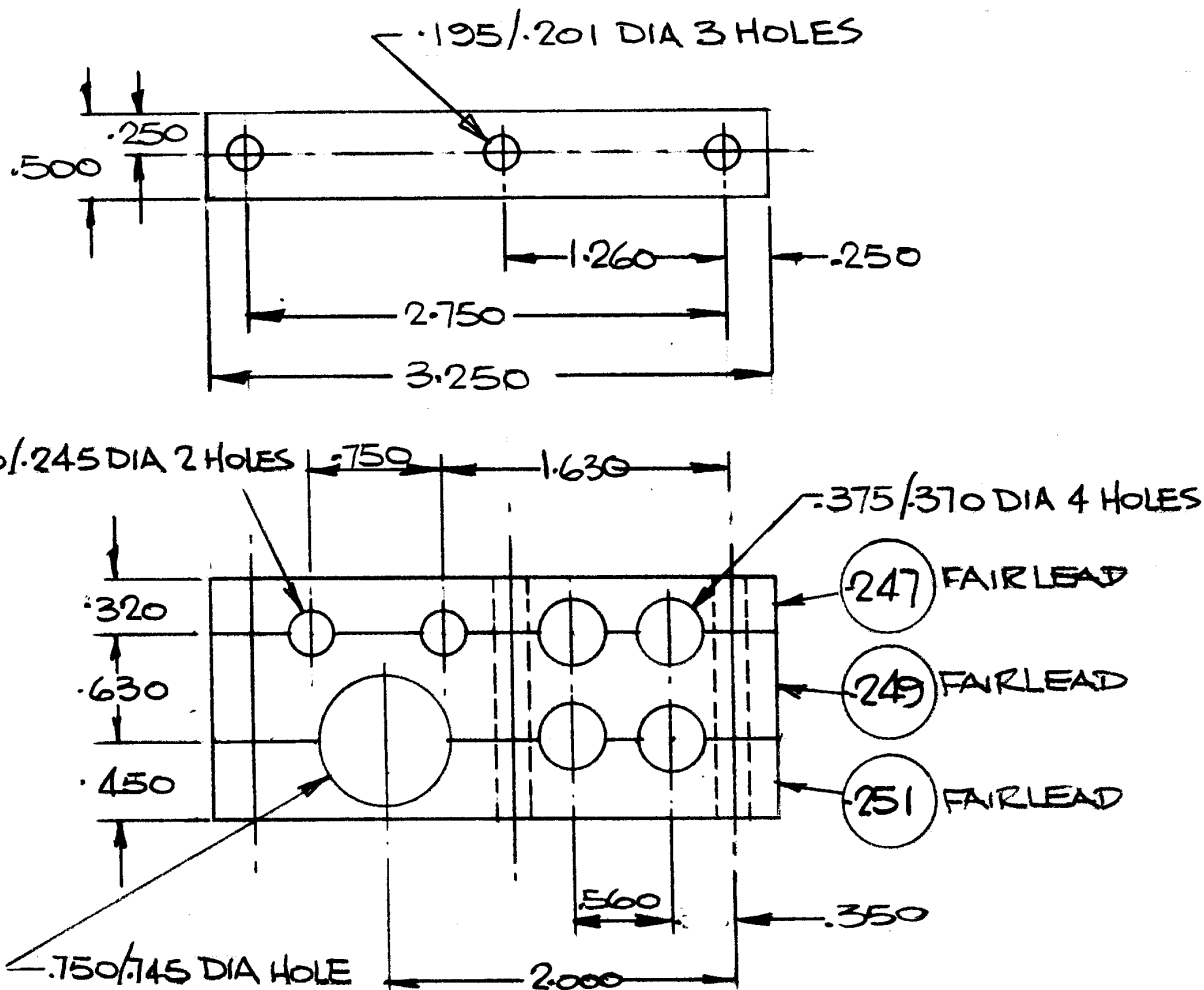

**NOTES:**

1. MATERIAL: 1/2" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-2
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-245** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 70
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV:

REV:


REV:

REV:

REV:

REV: A - 30 JUN 98

APPROVED: 3 MAR 80

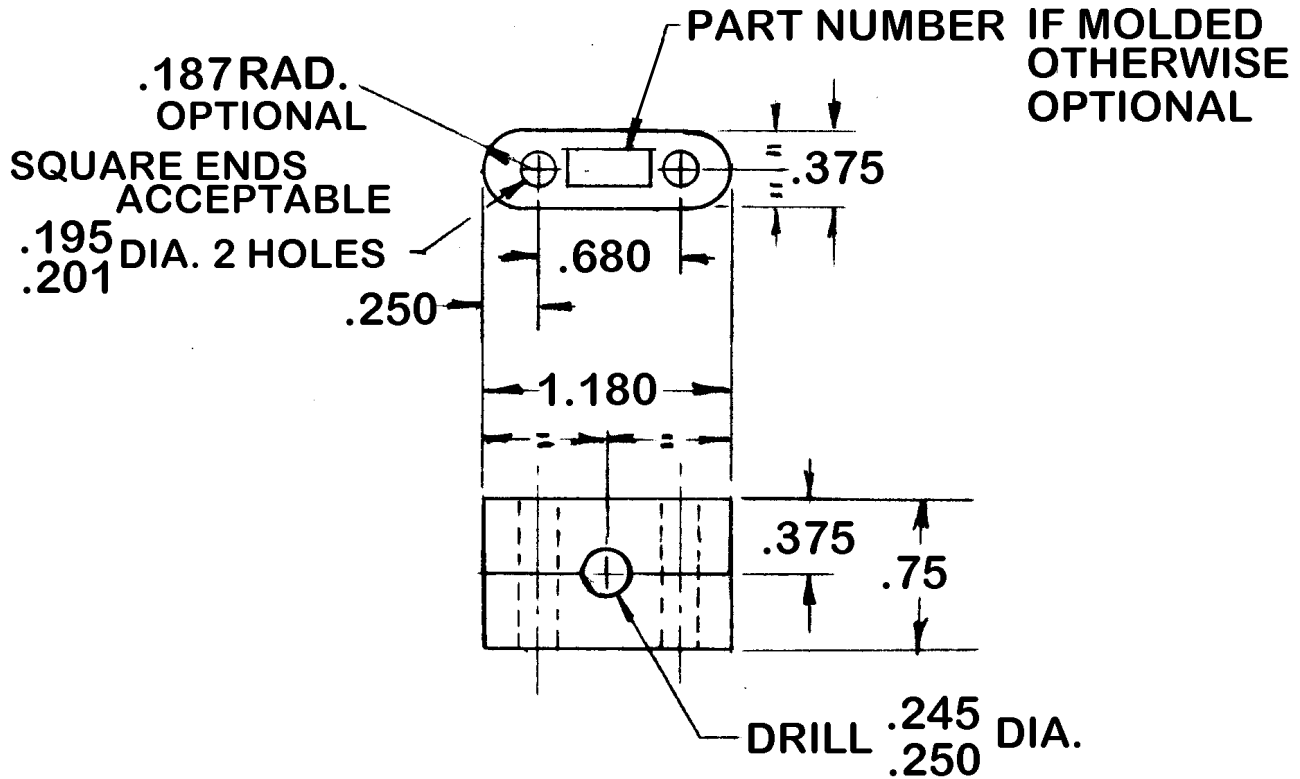

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-39
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-253** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 71
APPROVED	S. HAMID		

© REDRAWN

REV: 19 MAY 81  
REV: A - 28 NOV 86  
REV: B - 26 NOV 92  
REV: C - 30 JUN 98  
REV: 19 MAY 81

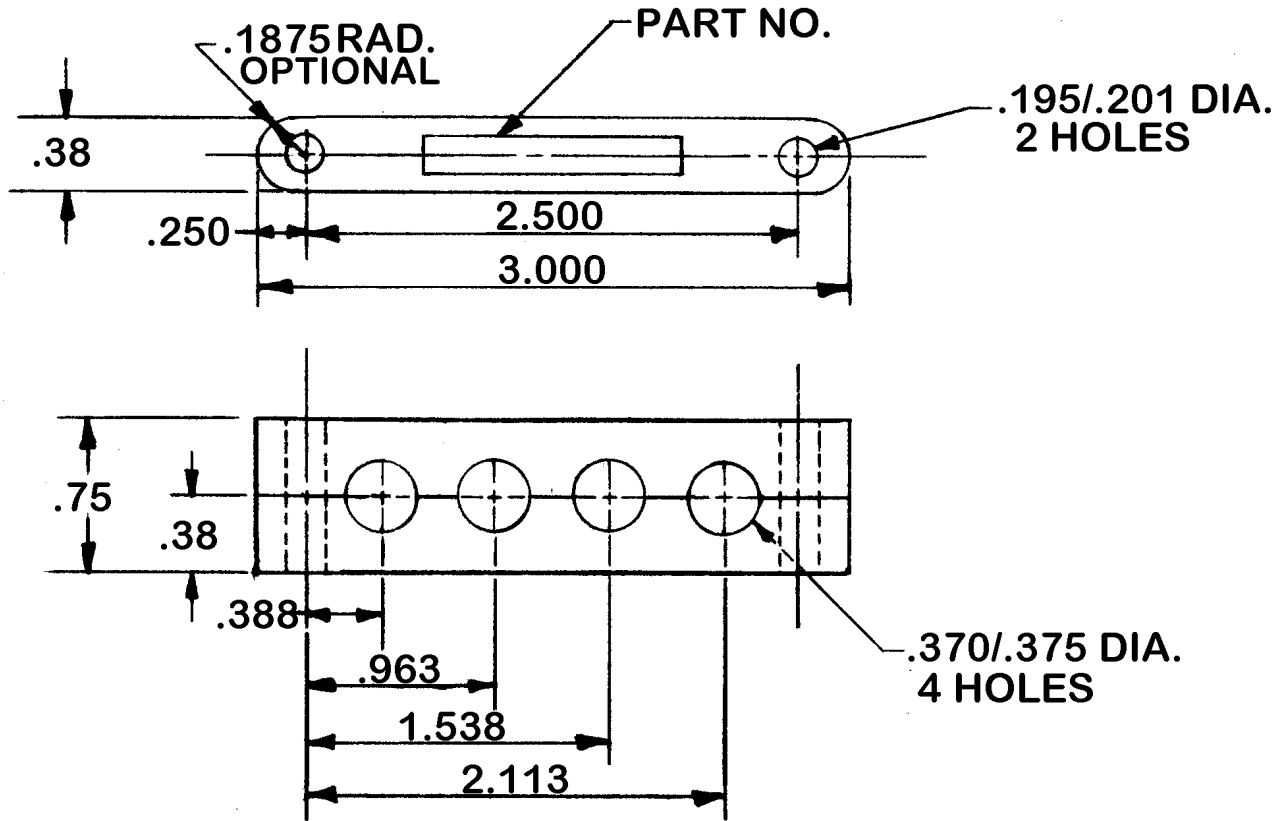

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-33
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-255** AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 72
APPROVED	S. HAMID		

REDRAWN

REV: 7 OCT 81  
REV: A - 26 NOV 92  
REV: B - 30 JUN 98  
REV: 7 OCT 81

VED:

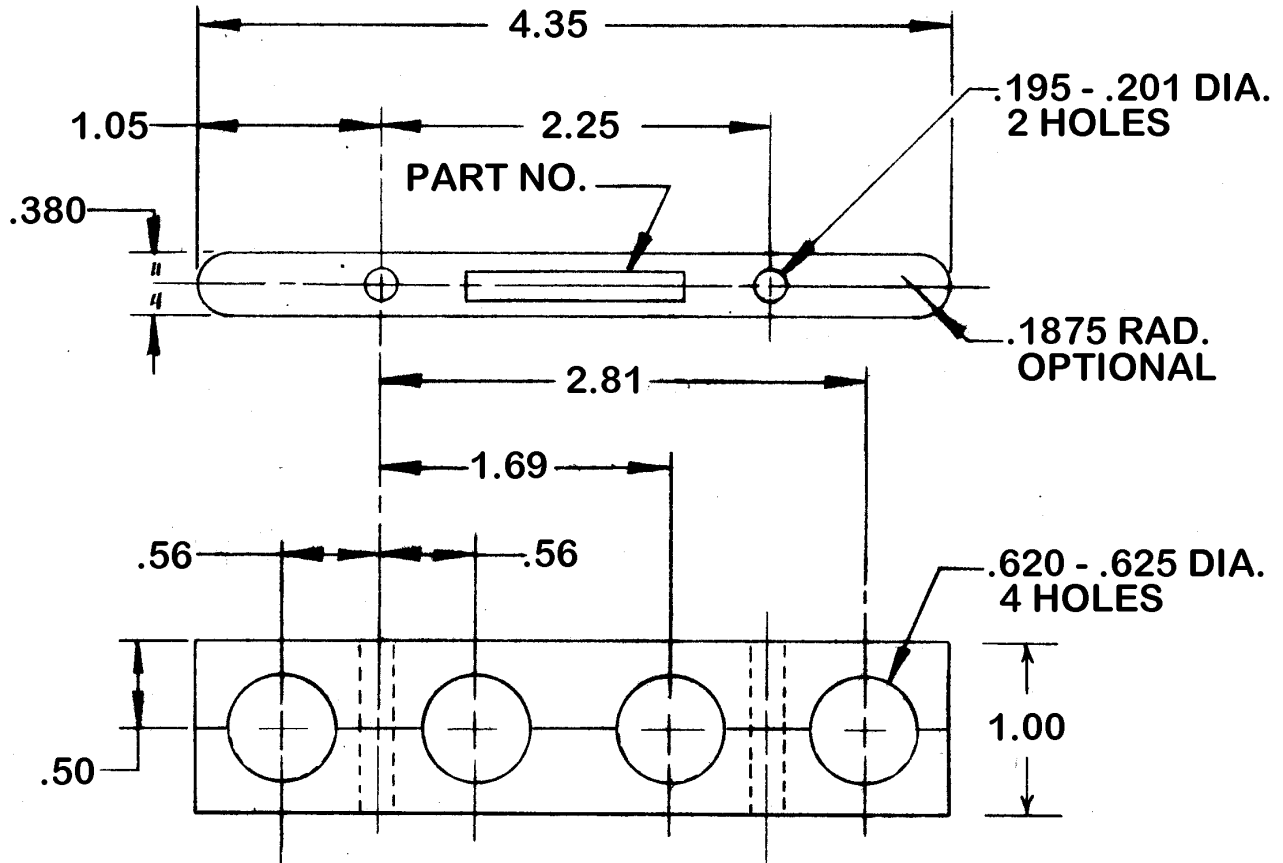

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-66
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-259** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 74
APPROVED	S. HAMID		

REDRAWN

REV:

REV:


REV:

REV:

REV: B - 30 JUN 98

REV: A - 6 JUN 84

APPROVED: 11 NOV 81

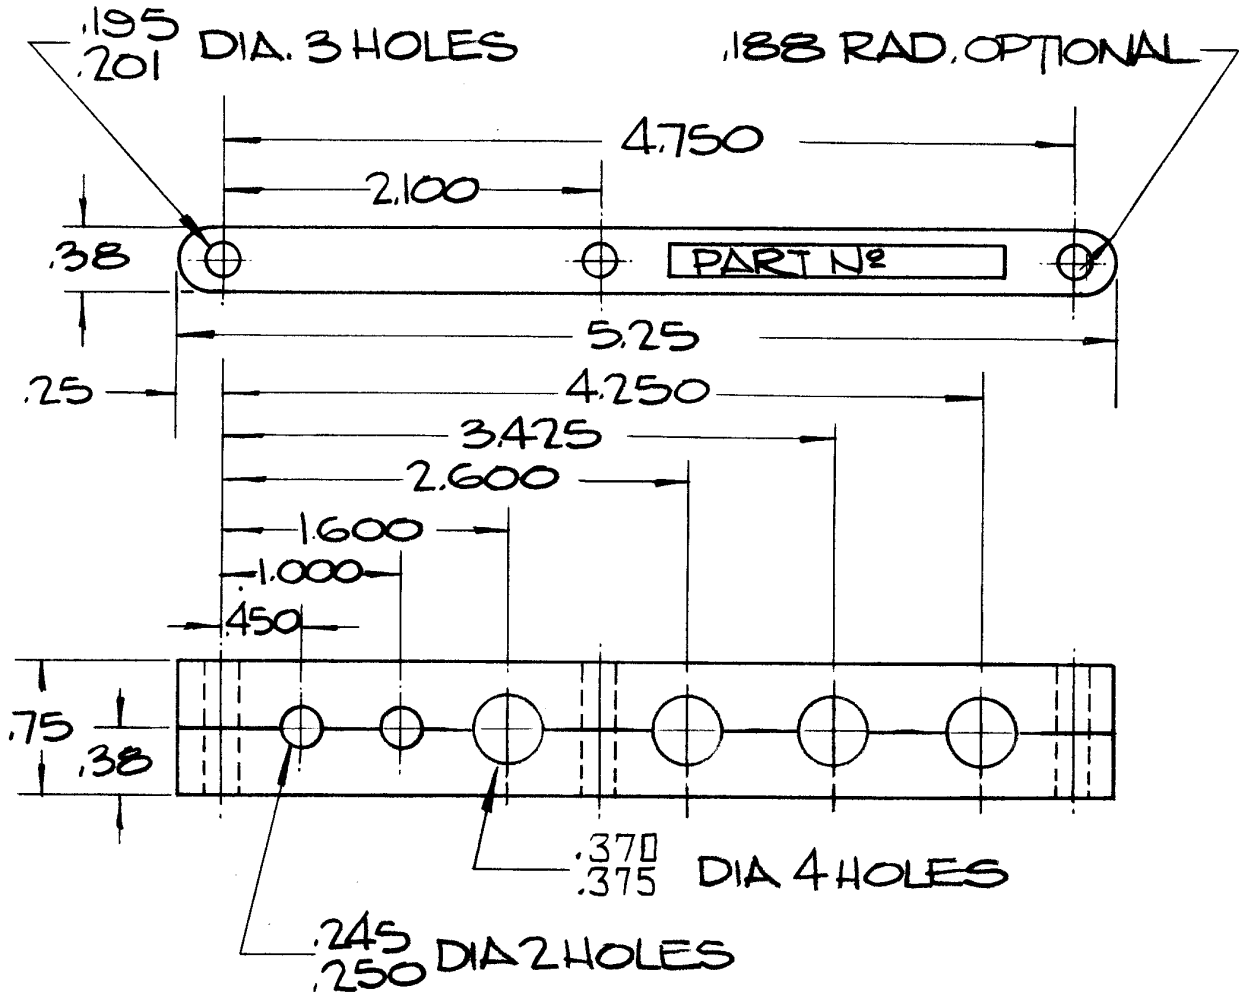

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-20
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-261 AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 75
APPROVED	S. HAMID		

REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: B - 30 JUN 98 REV: A - 18 MAY 82 APPROVED: 10 FEB 82



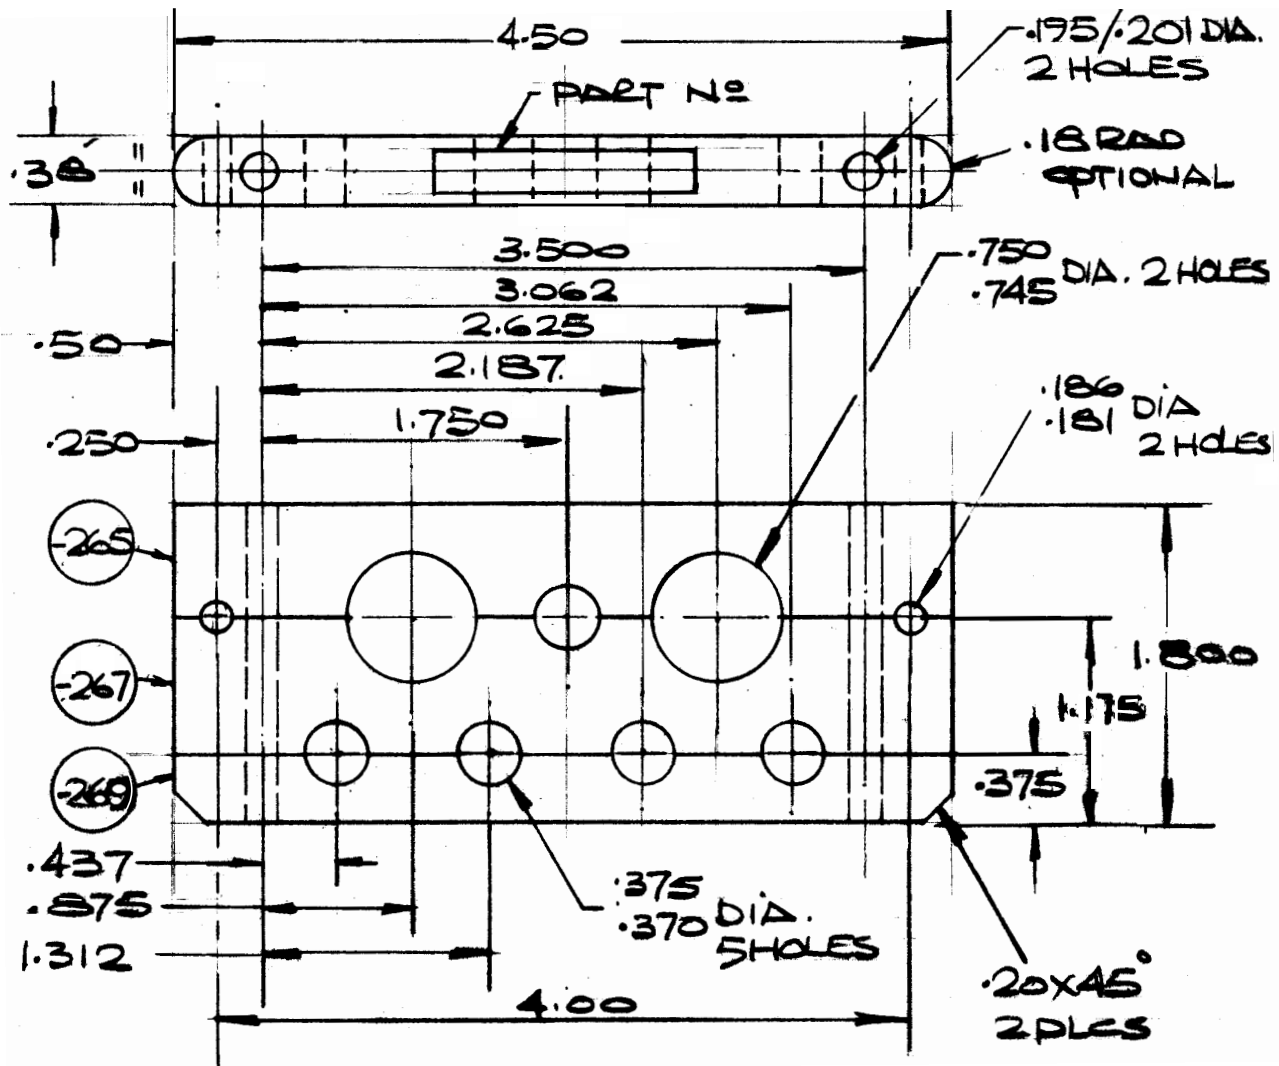

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-42
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-263 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 76
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: REV: A - 30 JUN 98 APPROVED: 22 MAR 82

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**  
**CAGE CODE 71867**  
**CSP STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

*This Page Is Intentionally Left Blank*

REV:

REV:

REV:

REV:

REV:

REV:

APPROVED: 30 JUN 98

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**  
**SHEET: 77**

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		SHEET: <b>78</b>
STRESSED	---		
APPROVED	S. HAMID		

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**  
**CAGE CODE 71867**  
**CSP STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

*This Page Is Intentionally Left Blank*

REV:

REV:

REV:

REV:

REV:

REV:

APPROVED: 30 JUN 98

REV:

REV:


REV:

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 79

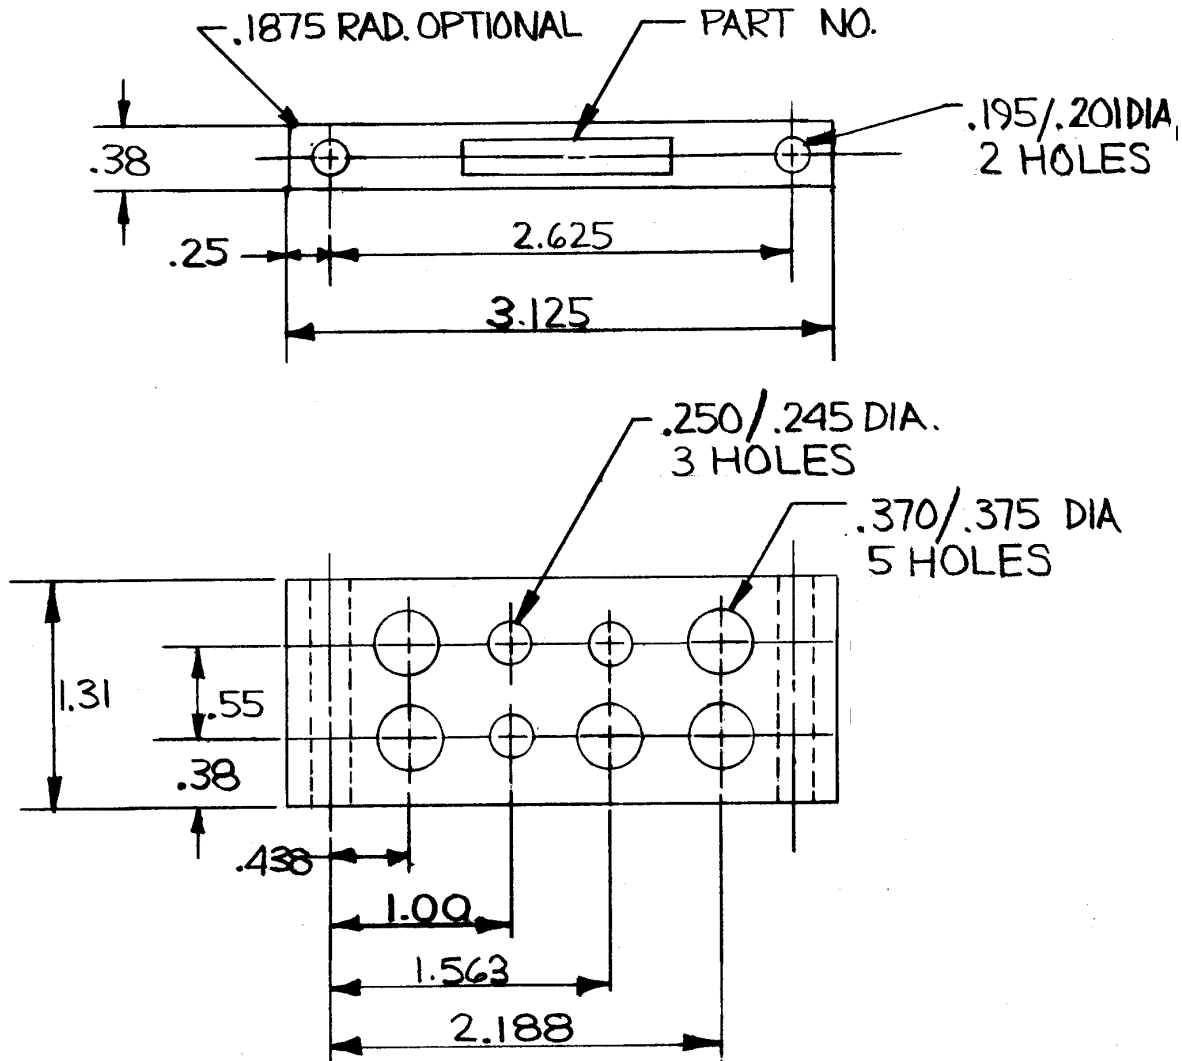

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-46
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


(-271) AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 80
APPROVED	S. HAMID		

(A) REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: A - 30 JUN 98 REV: 28 APR 82

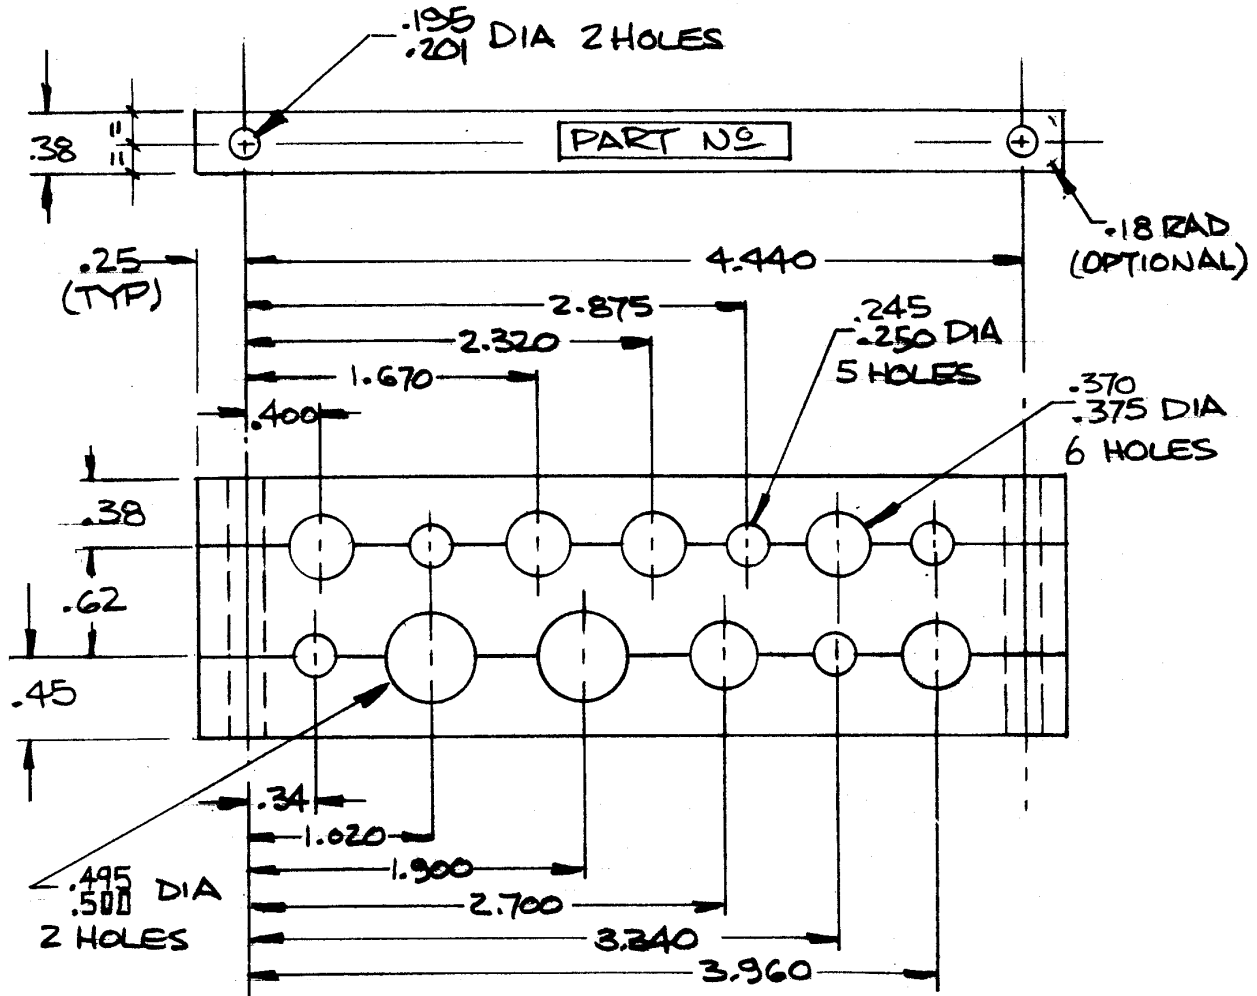

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-47
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-273** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 81
APPROVED	S. HAMID		

REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: B - 30 JUN 98 REV: A - 19 MAY 82 REV: 28 APR 82

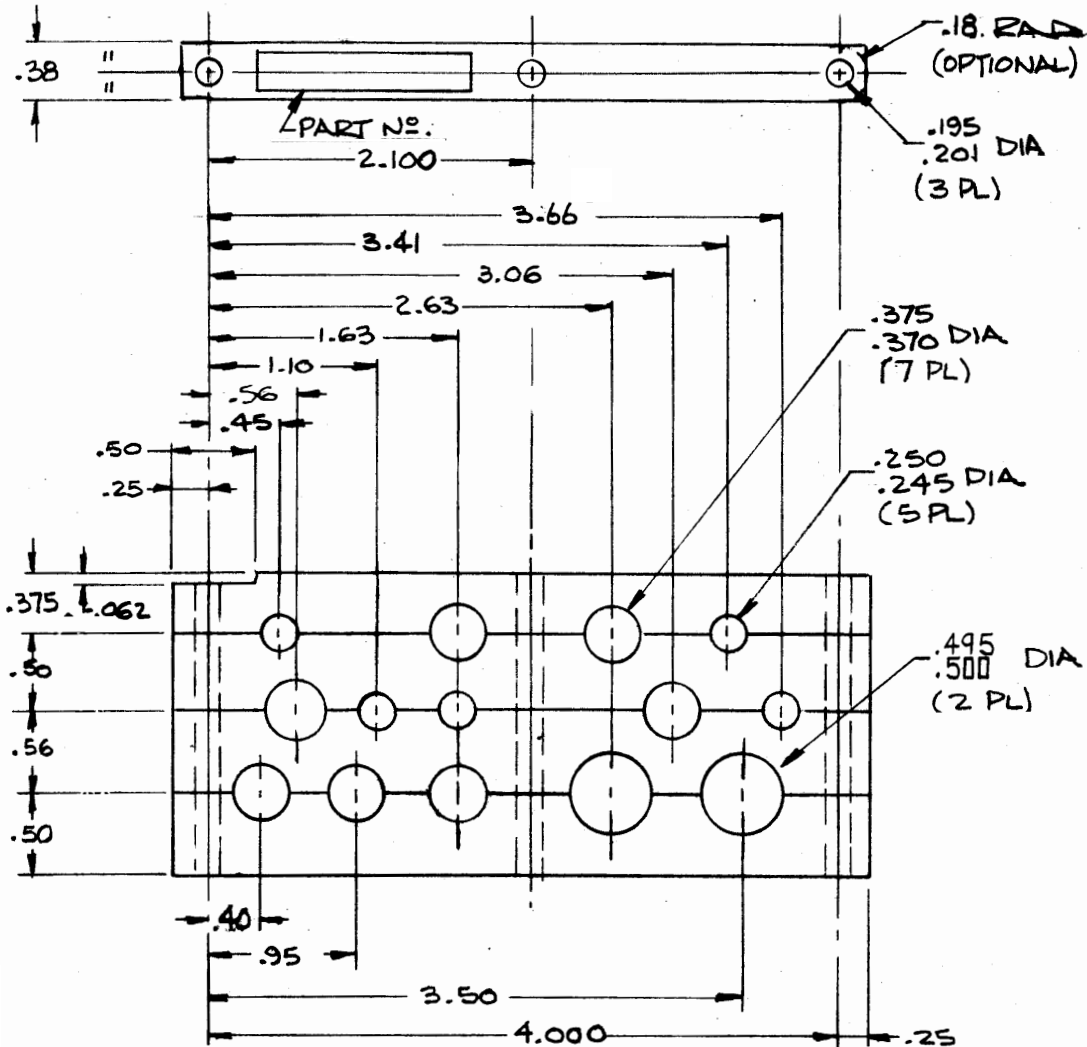

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP375-1 OR CSP313-43
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-274 AS DRAWN**


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 82
APPROVED	S. HAMID		





**APPROVED:**

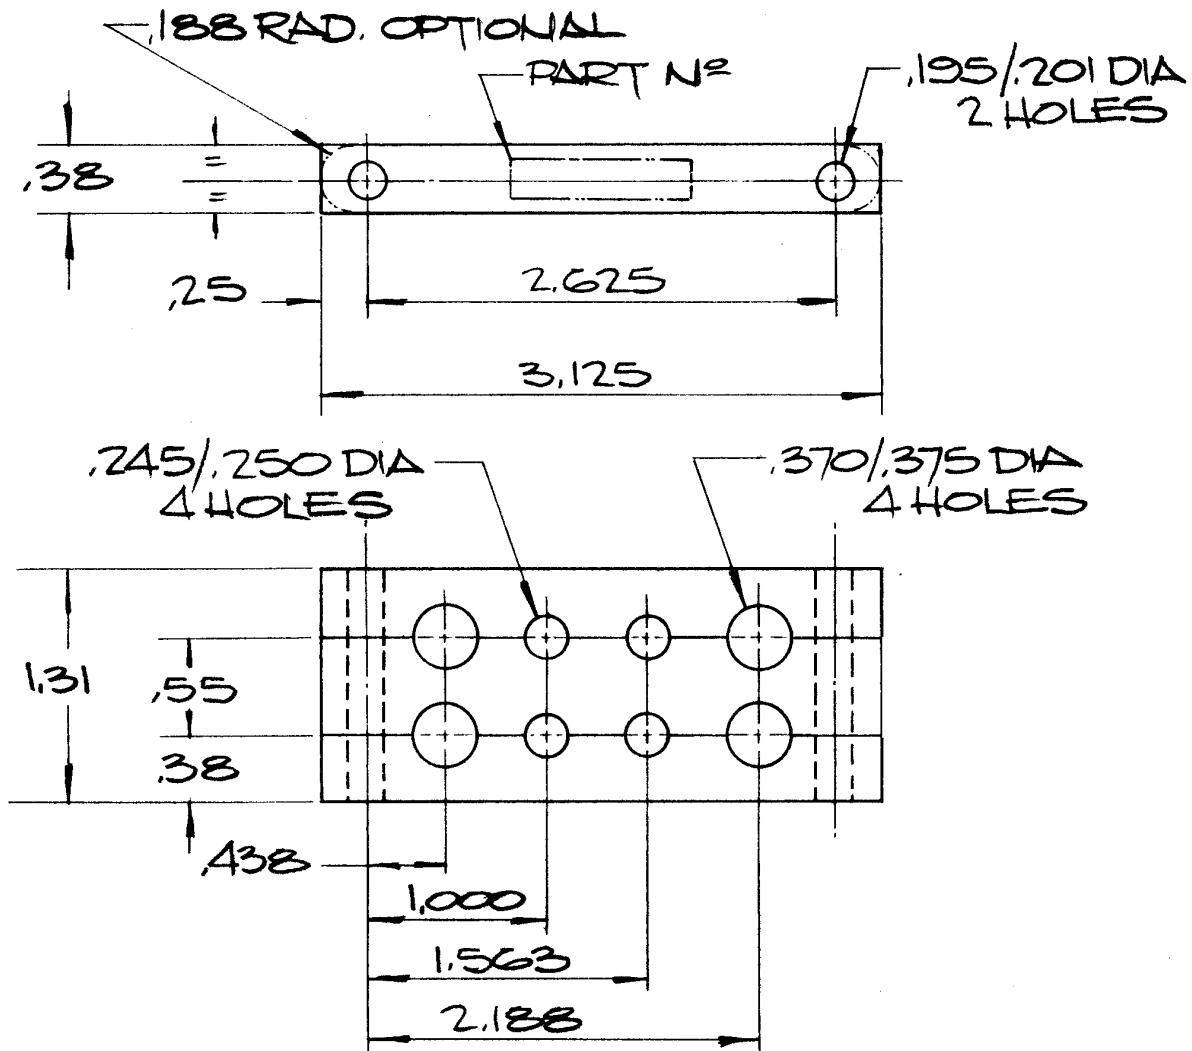

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-46
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-279** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 85
APPROVED	S. HAMID		

(A) REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: A - 30 JUN 98 APPROVED: 3 MAY 82

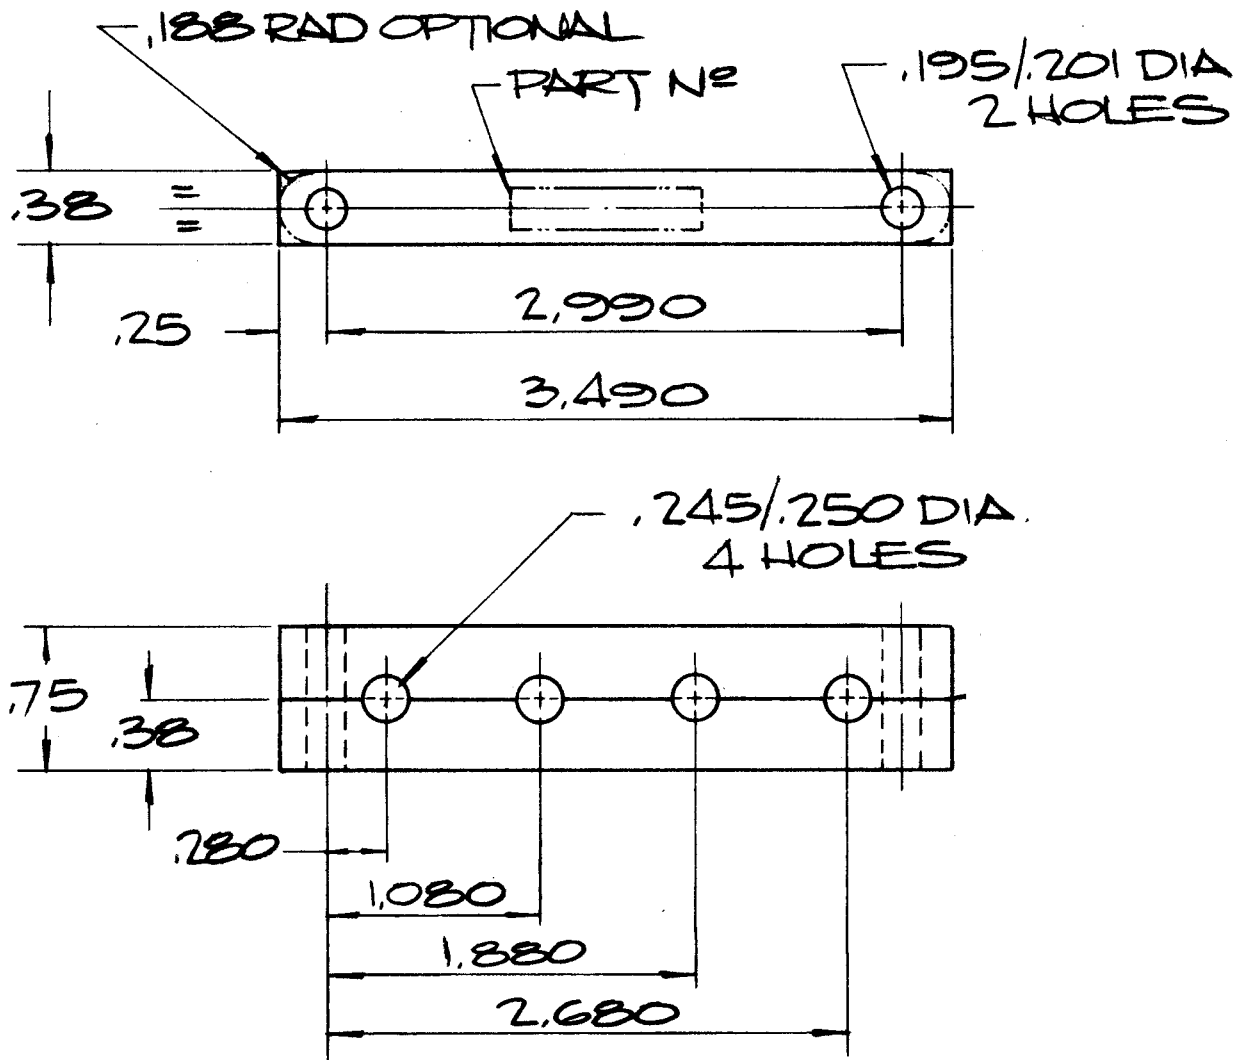

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-26
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-281** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY


DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 86
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: A - 30 JUN 98 APPROVED: 3 MAY 82

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED



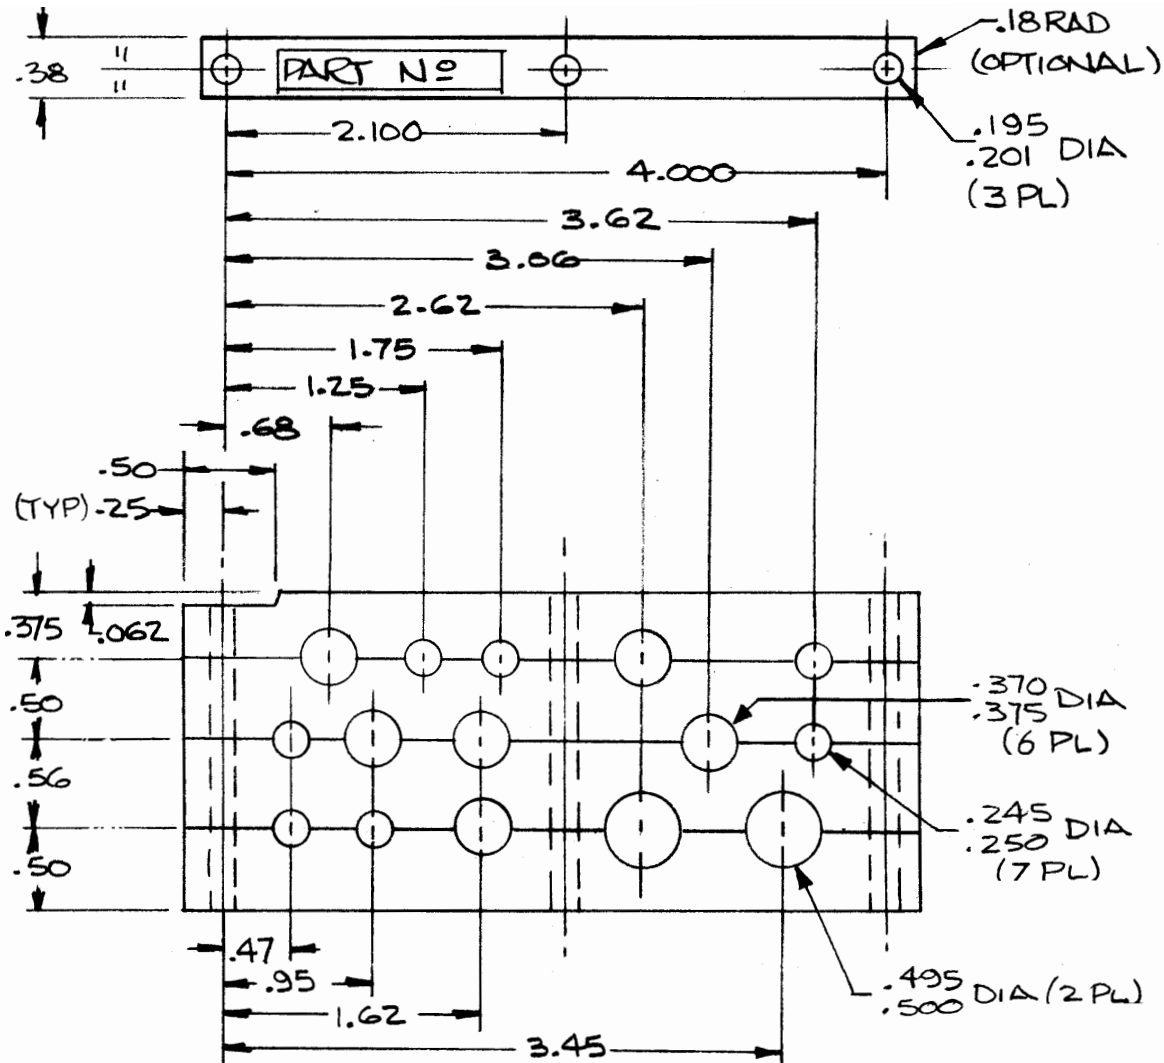

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP375-1 OR CSP313-43
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-287** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 89
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: REV: REV: A - 30 JUN 98 APPROVED: 21 JUN 82

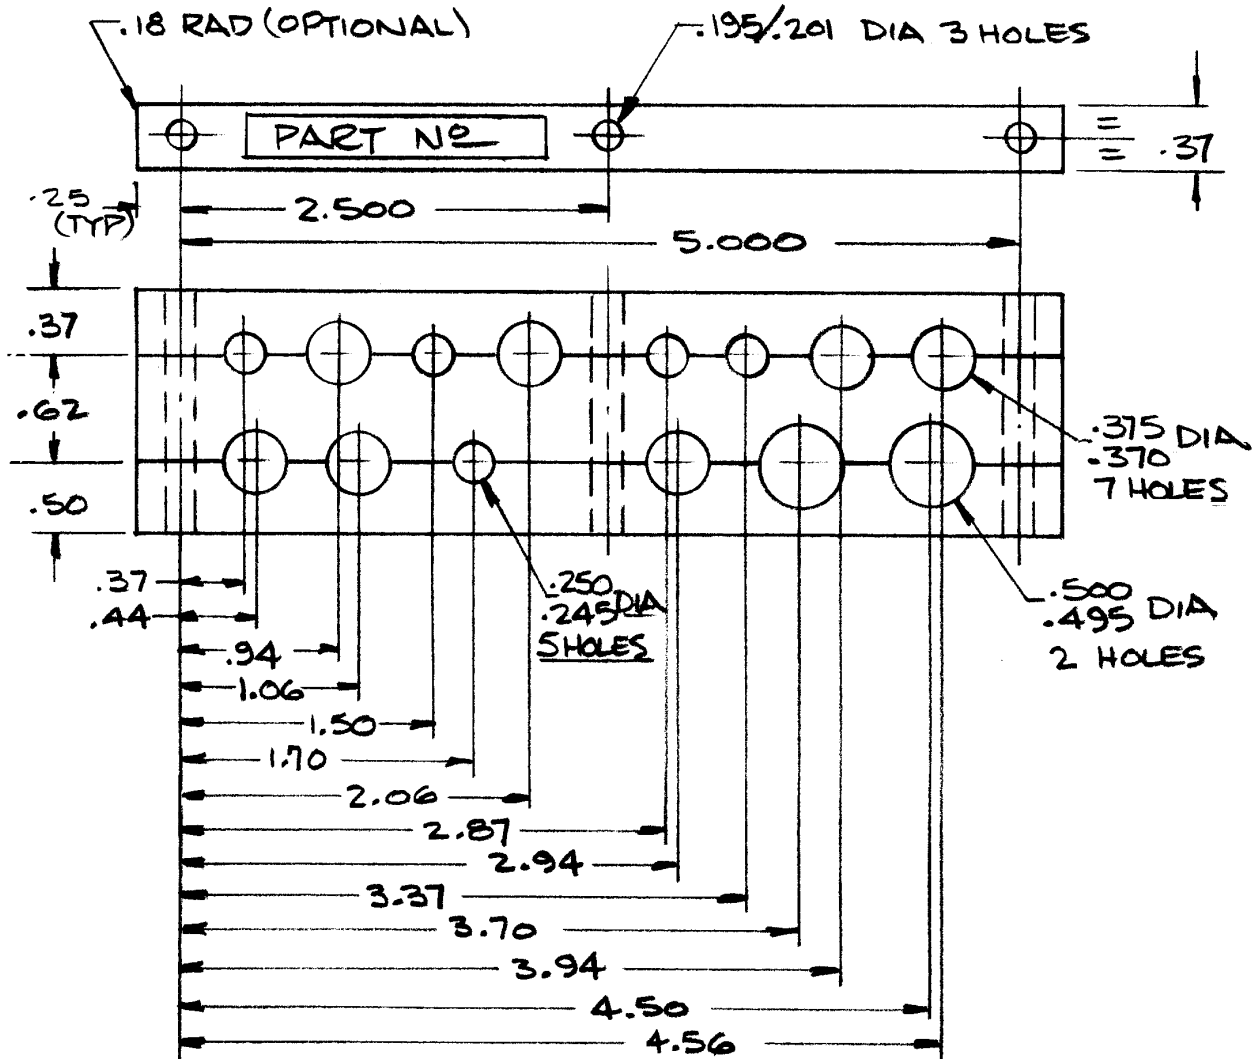

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-55
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-289** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 90
APPROVED	S. HAMID		

(A) REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: REV: A - 30 JUN 98 APPROVED: 5 JUL 82

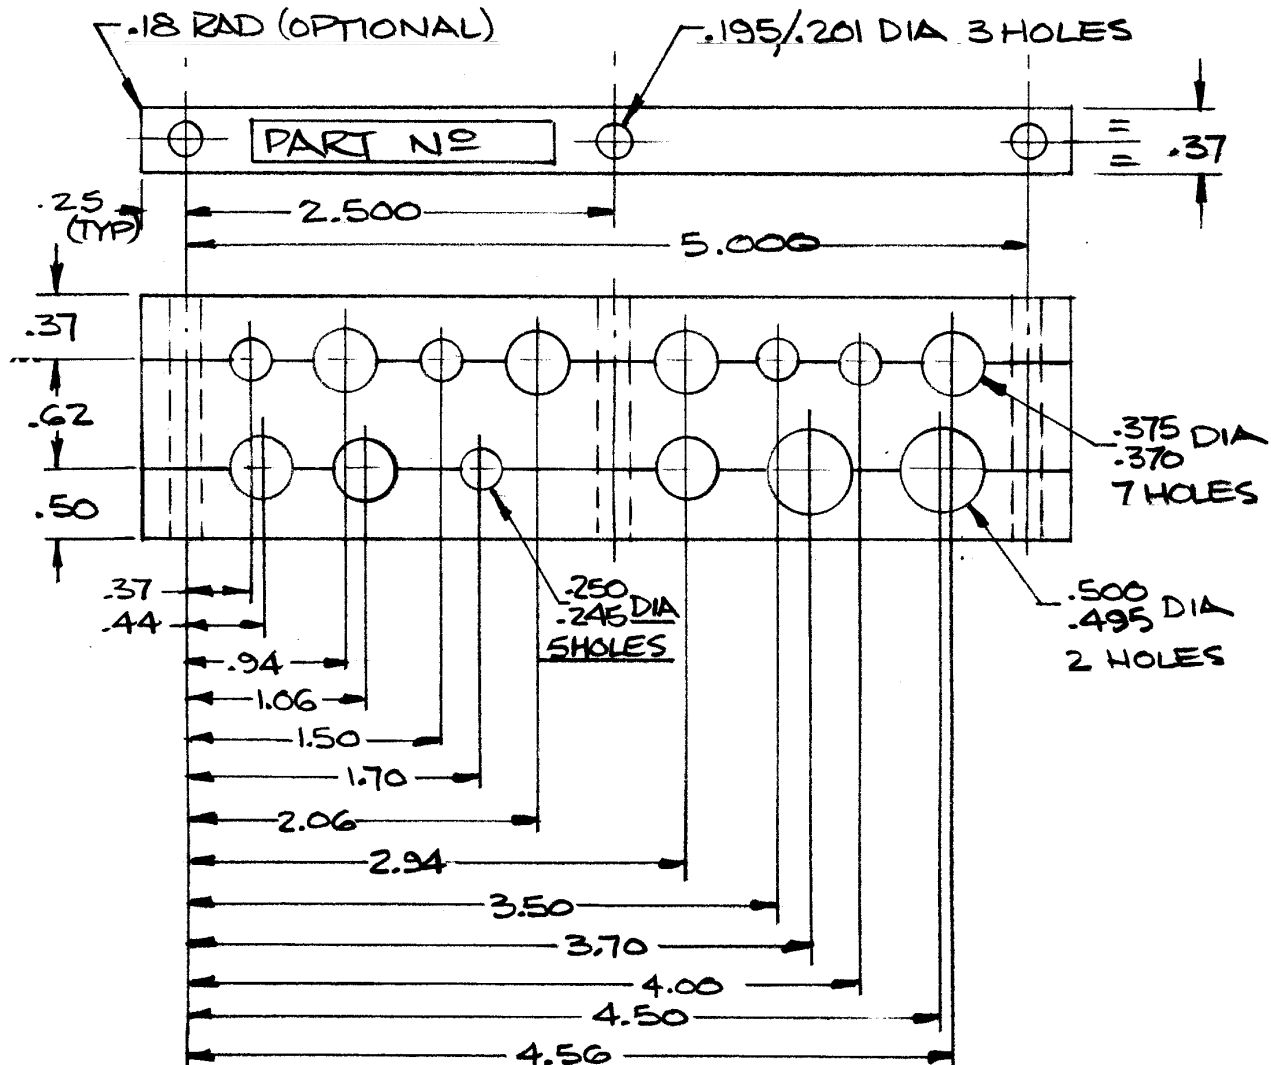

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-55
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-291** AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 91
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: REV: A - 30 JUN 98 APPROVED: 5 JUL 82



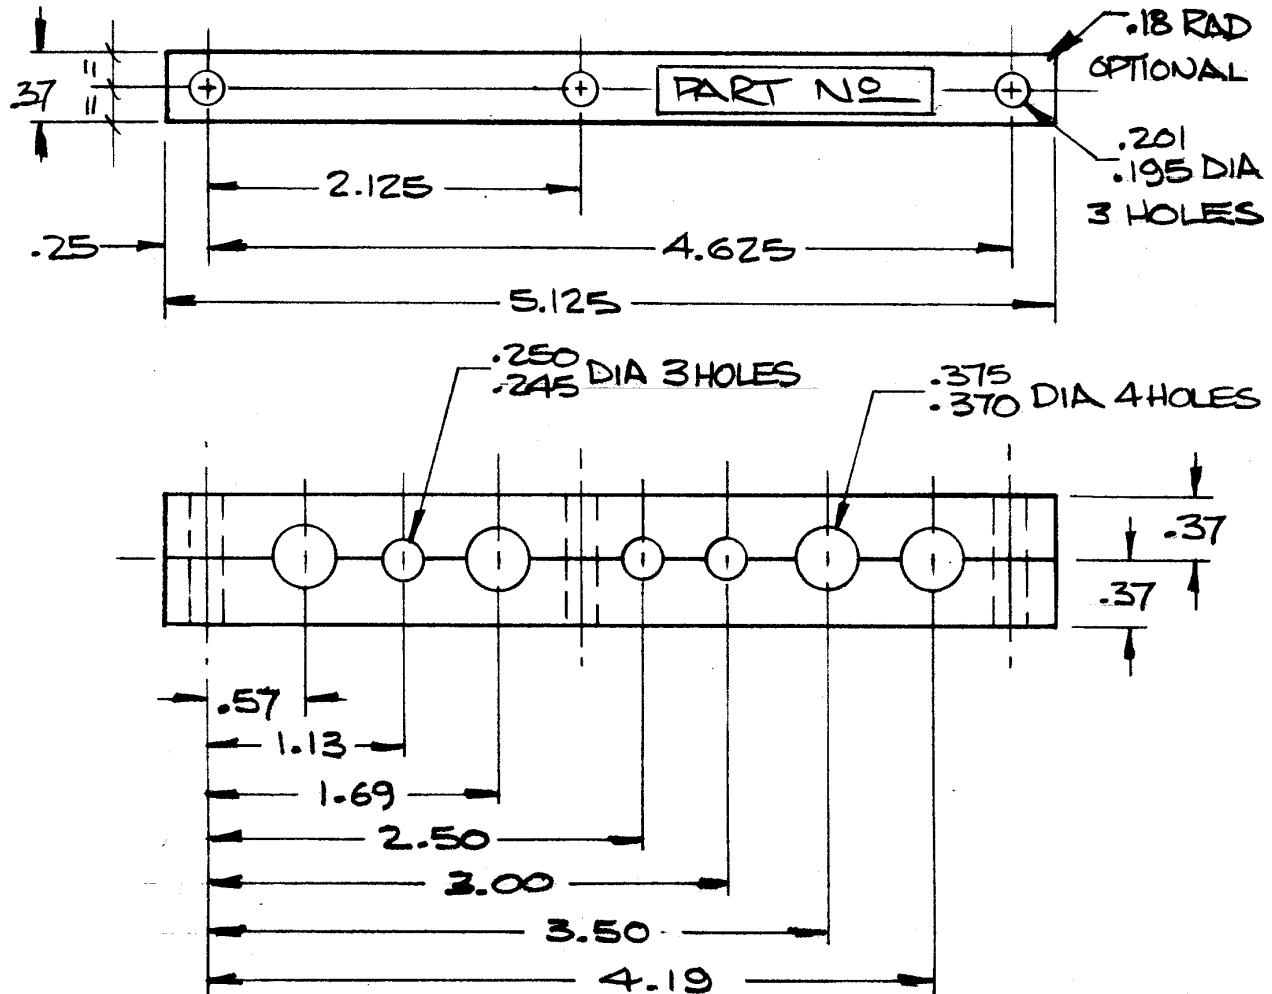

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-56
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-292** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 92
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: A - 30 JUN 98 APPROVED: 24 AUG 82

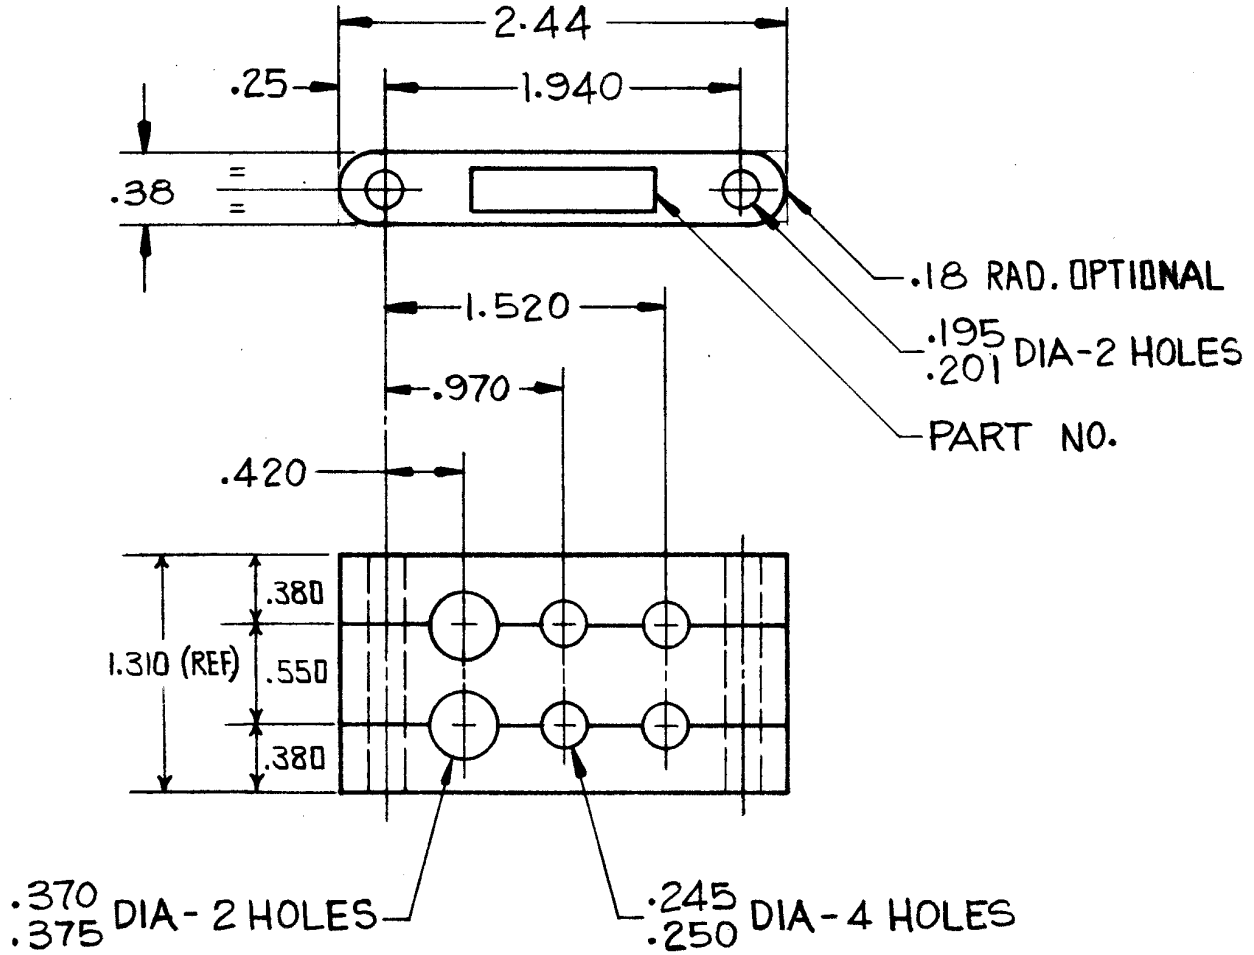

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-5
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-293 AS  
DRAWN


SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 93
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: A - 30 JUN 98 APPROVED: 3 FEB 83

APP

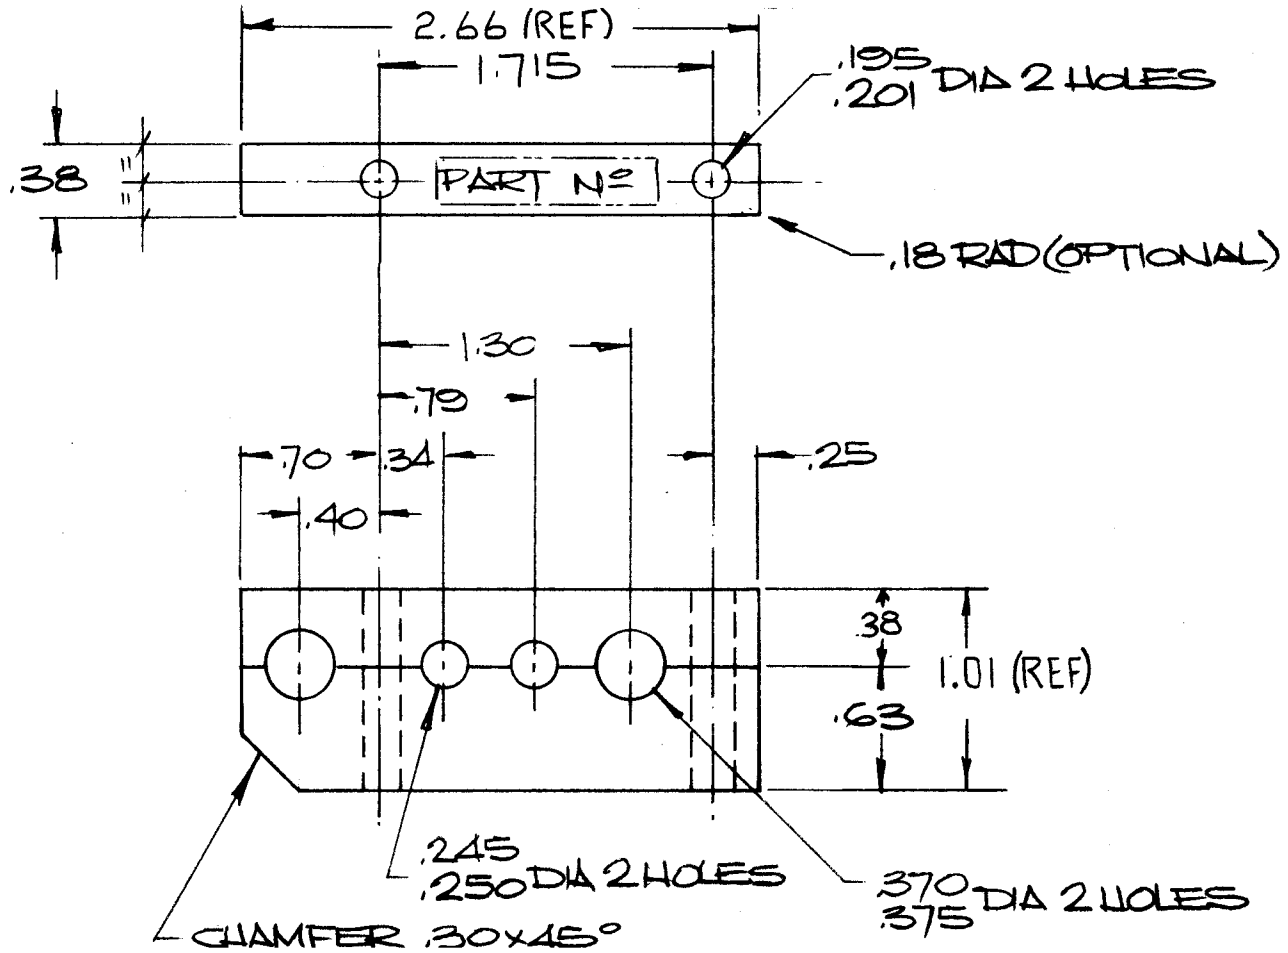

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-49
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-295** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 95
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV:

REV:


REV:

REV:

REV:

REV: A - 30 JUN 98

APPROVED: 4 JUL 83

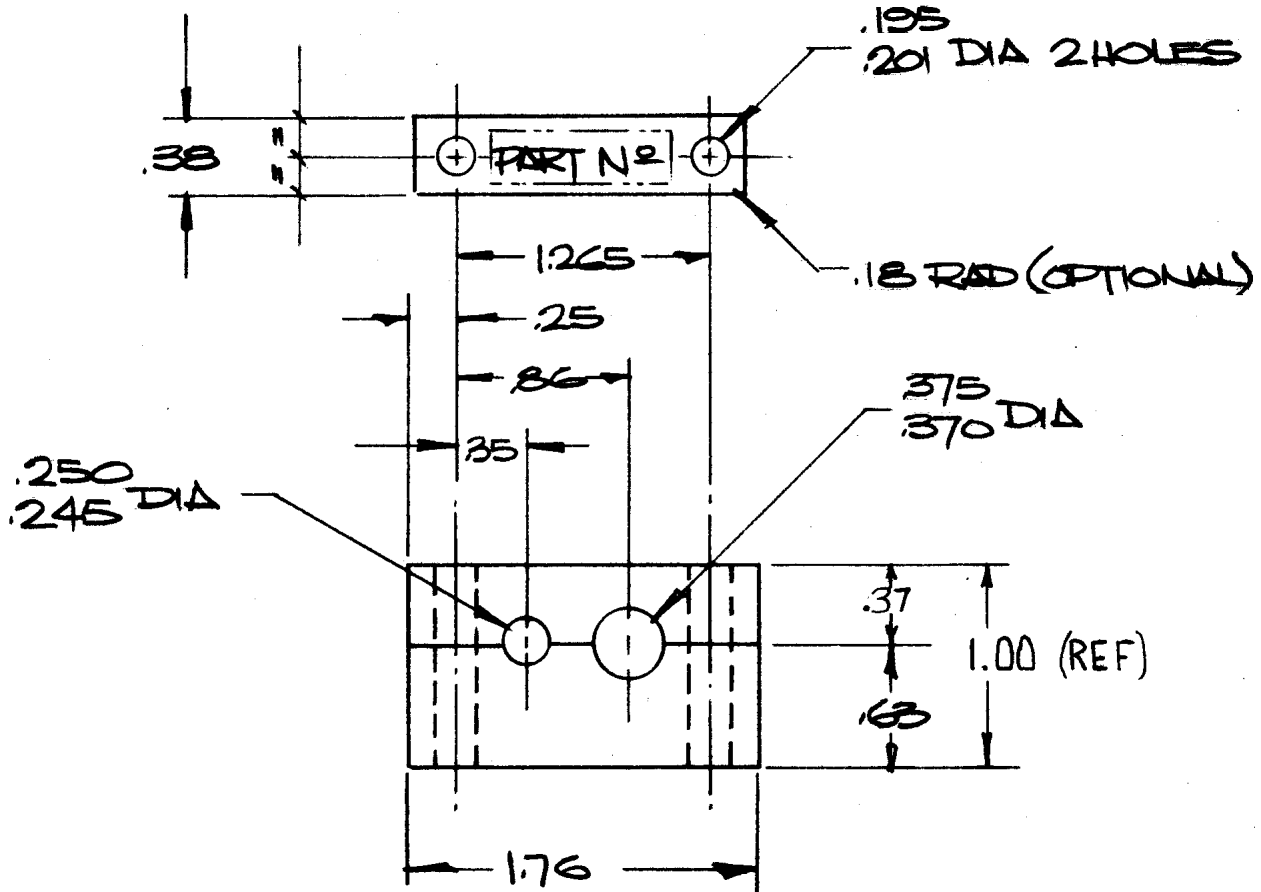

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-48
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-296 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 96
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV:

REV:


REV:

REV:

REV:

REV: A - 30 JUN 98

APPROVED: 4 JUL 83

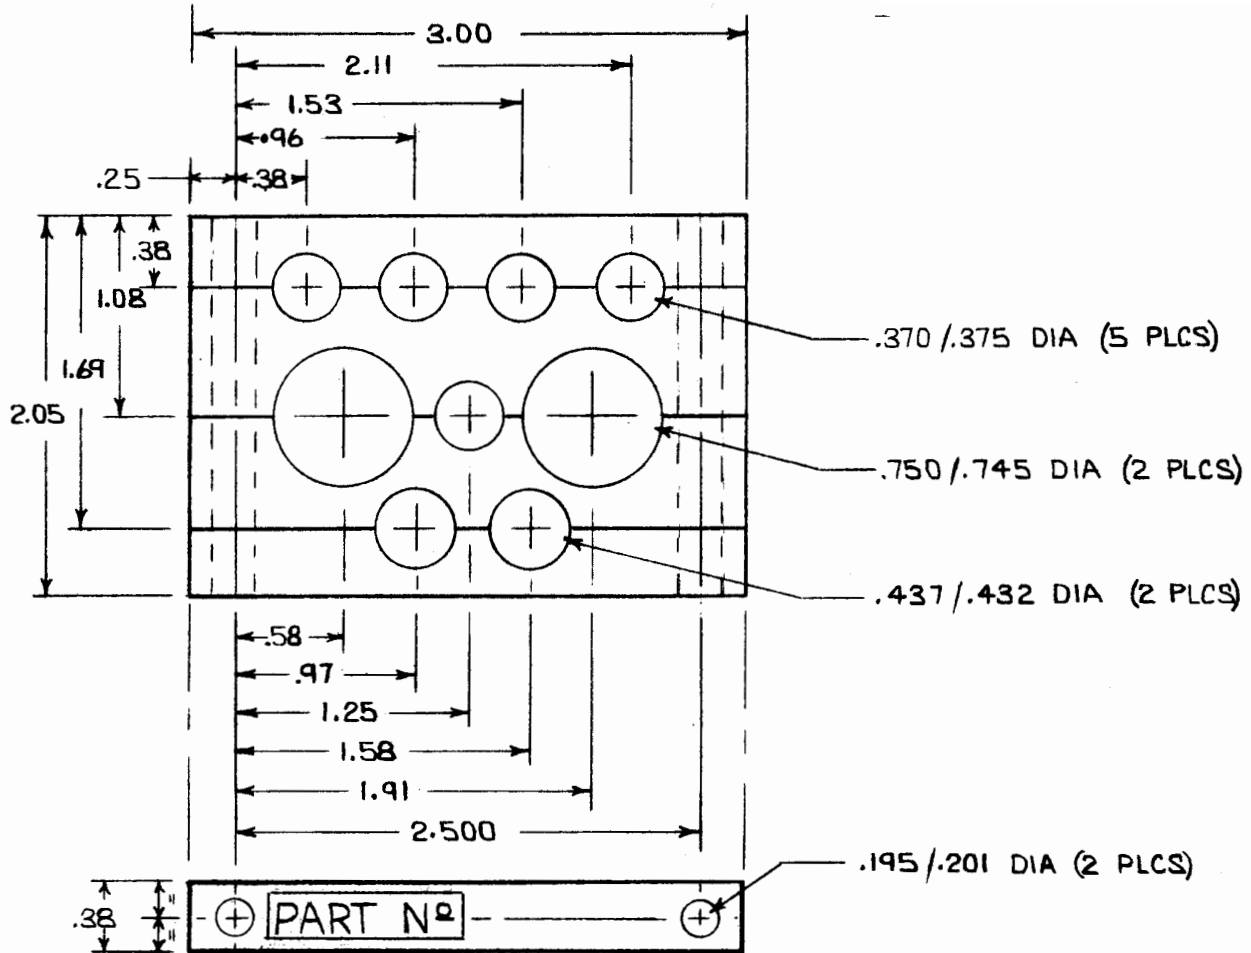

**NOTES:**


1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-33
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 97
APPROVED	S. HAMID		

REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: 8 JAN 86  
REV: A - 10 MAR 86  
REV: B - 30 JUN 98  
REV: 8 JAN 86

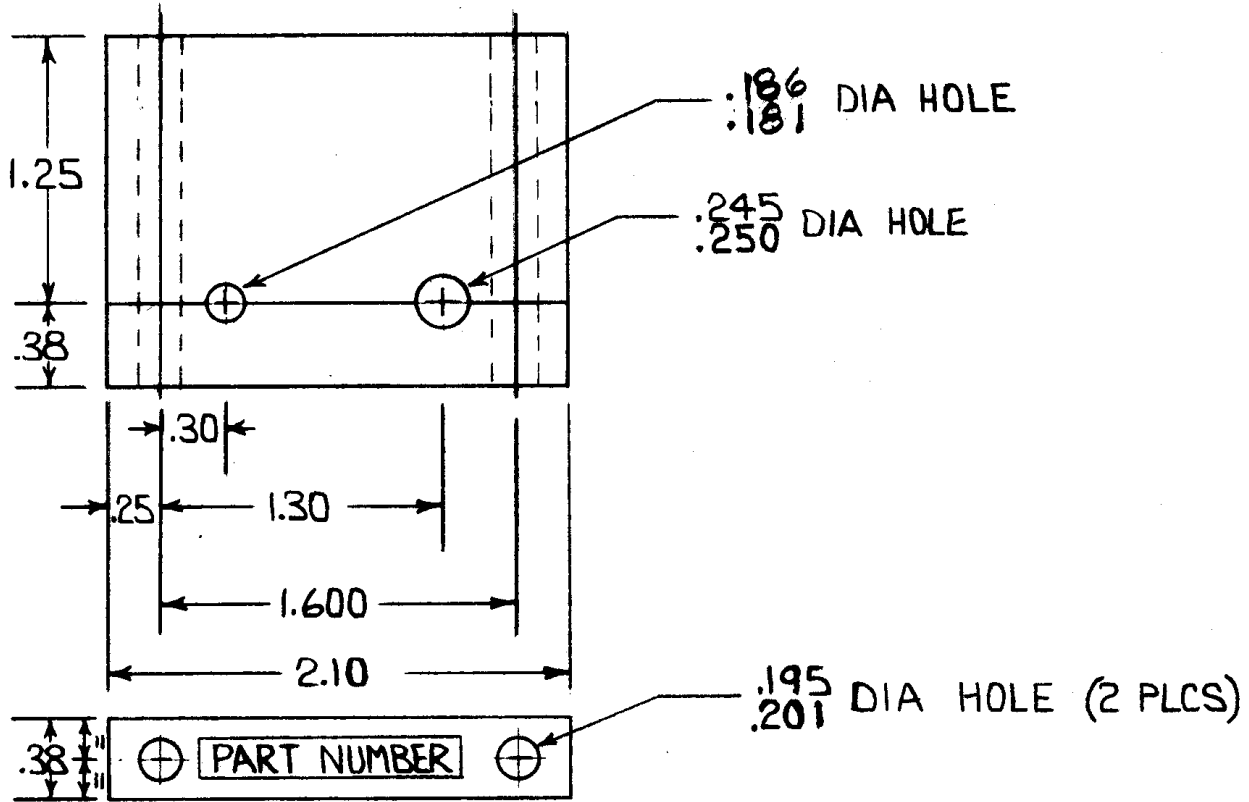

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-68
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

-298 AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 98
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV:

REV:


REV:

REV:

REV:

REV: A - 30 JUN 98

APPROVED: 22 MAY 86

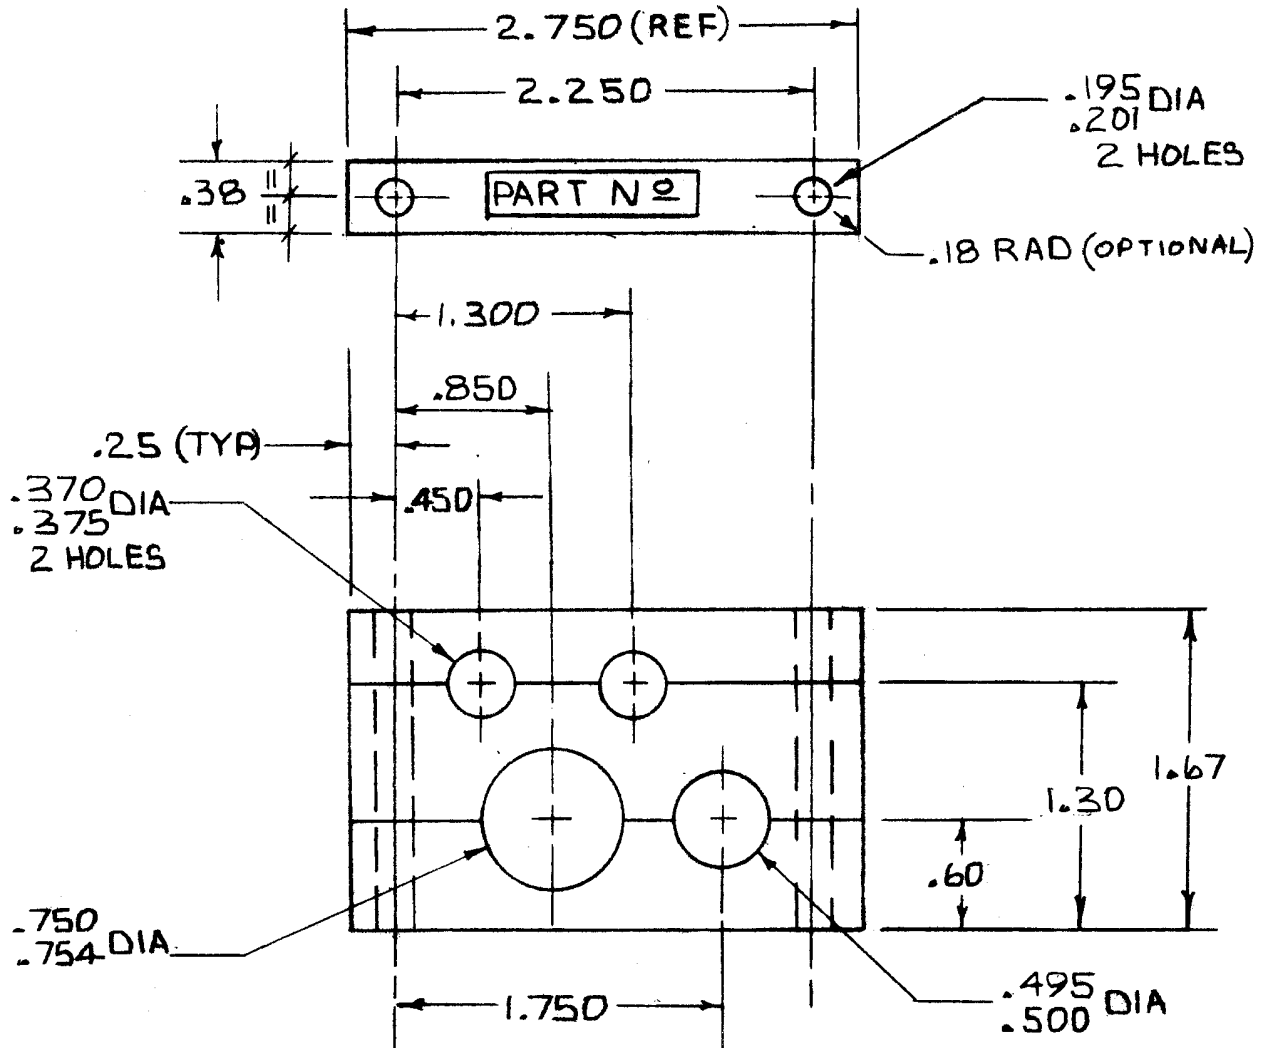

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-31
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-299** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: <b>99</b>
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: REV: REV: A - 30 JUN 98 APPROVED: 28 OCT 86






AP

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**

CAGE CODE 71867  
CSP STANDARD

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

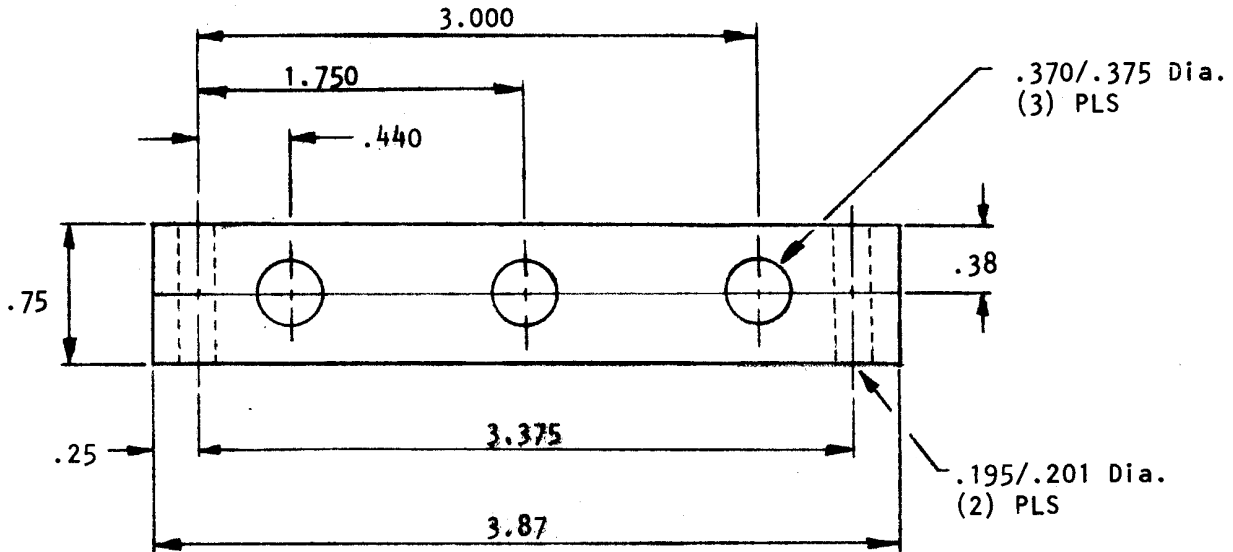

#### NOTES:

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-71
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-302** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 102
APPROVED	S. HAMID		

REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: 10 APR 87 REV: A - 15 APR 87 REV: B - 30 JUN 98 REV: 10 APR 87

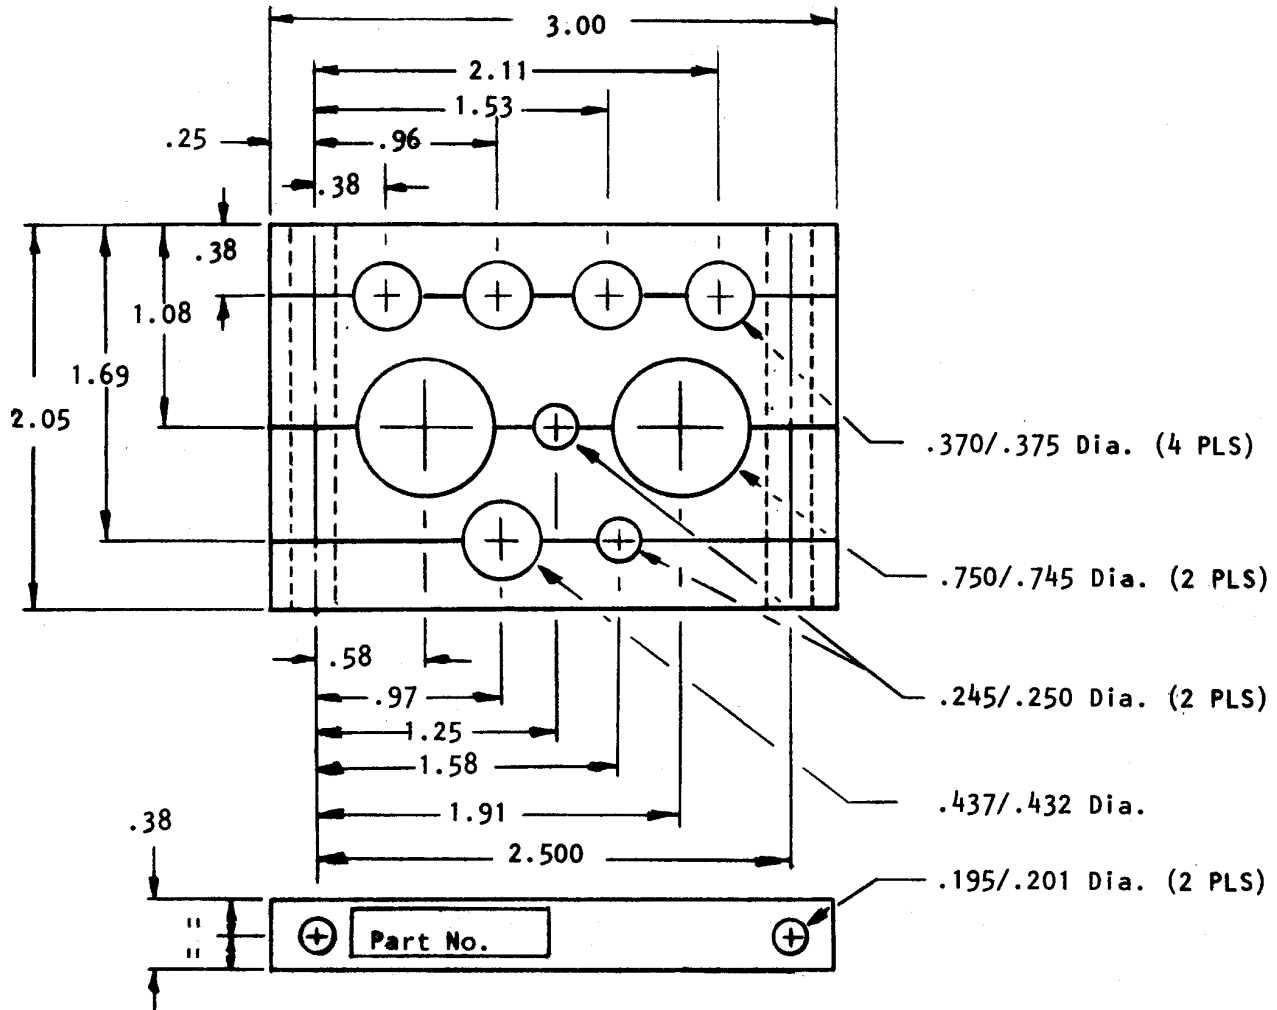

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-33
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-303** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 103
APPROVED	S. HAMID		

(A) REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: REV: REV: A - 30 JUN 98 REV: 4 JUN 87

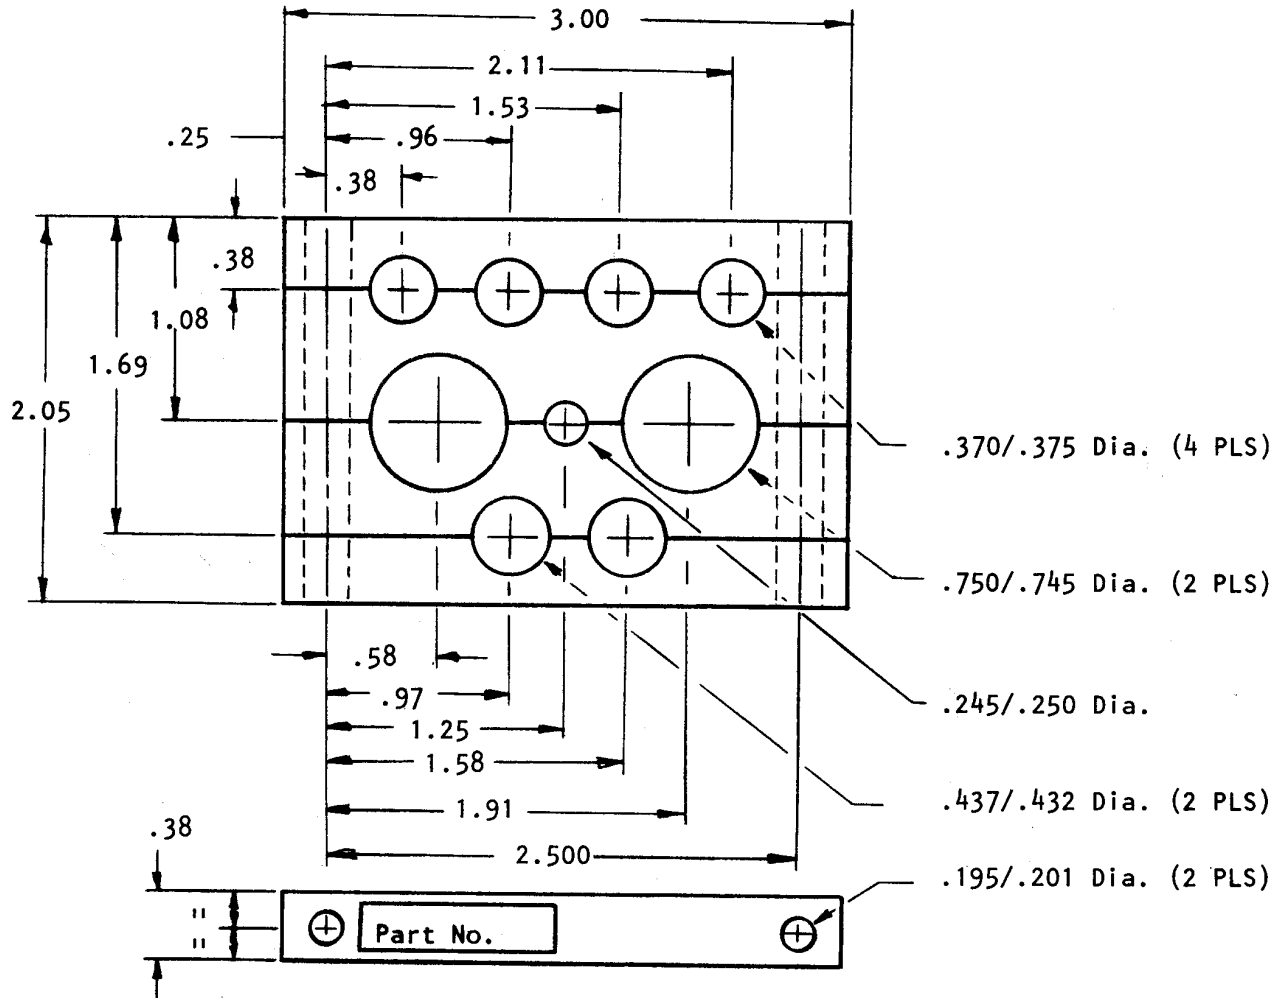

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-33
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK



**-304** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 104
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: REV: REV: A - 30 JUN 98 REV: 4 JUN 87

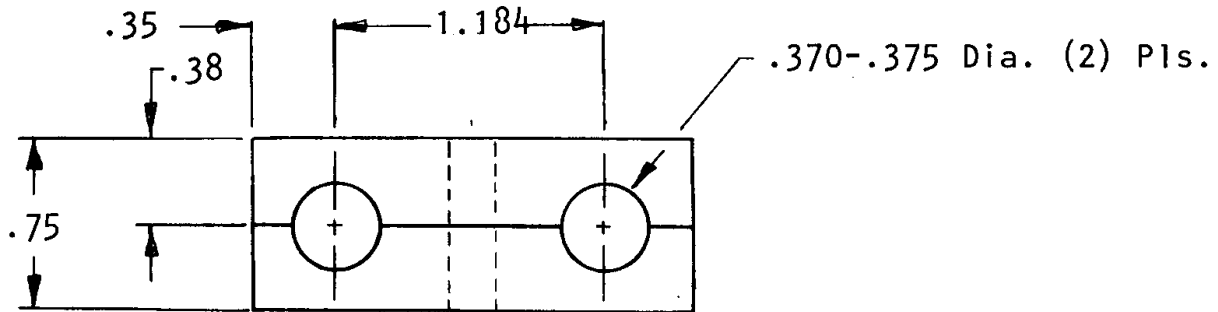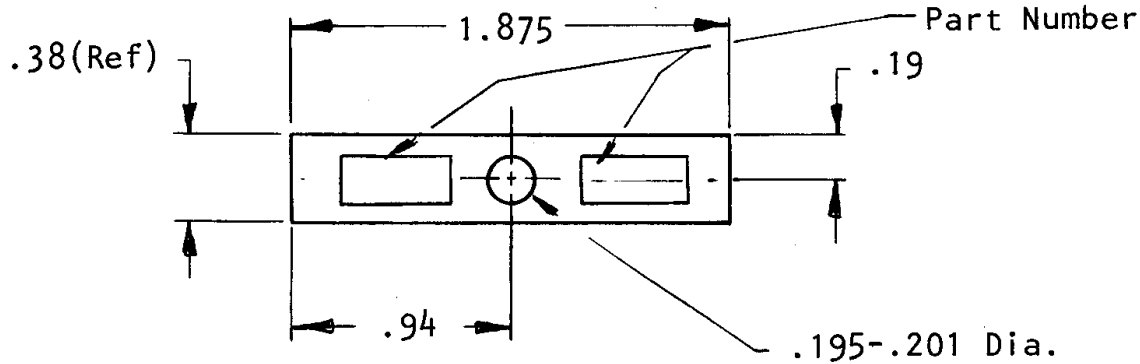

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-72
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-305** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: <b>105</b>
APPROVED	S. HAMID		

Ⓐ REDRAWN

REV: REV: REV: REV: REV: REV: A - 30 JUN 98 APPROVED: 2 FEB 88

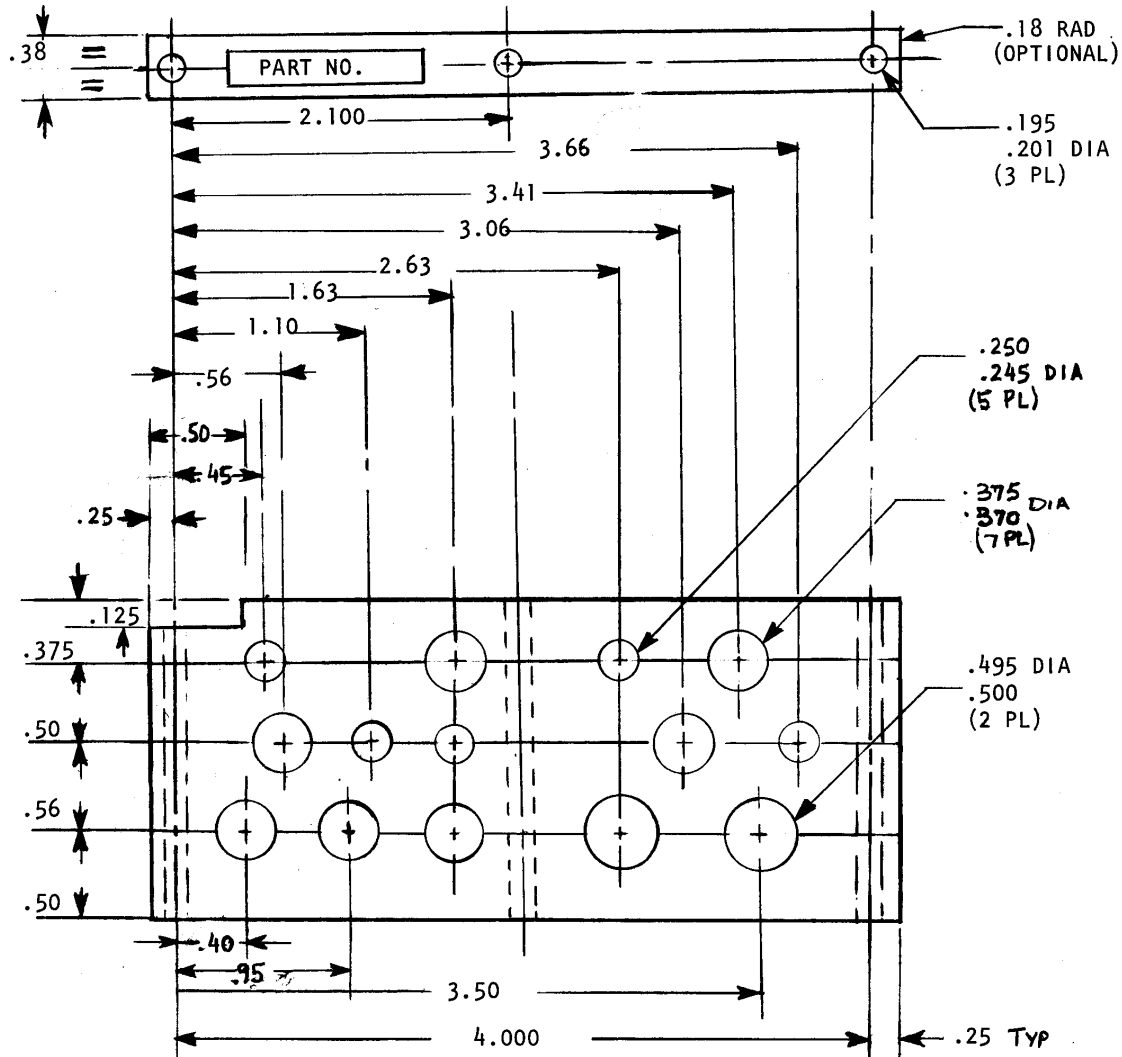

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP375-1 OR CSP313-43
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-306** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: <b>106</b>
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: REV: REV: A - 30 JUN 98 REV: 12 OCT 88

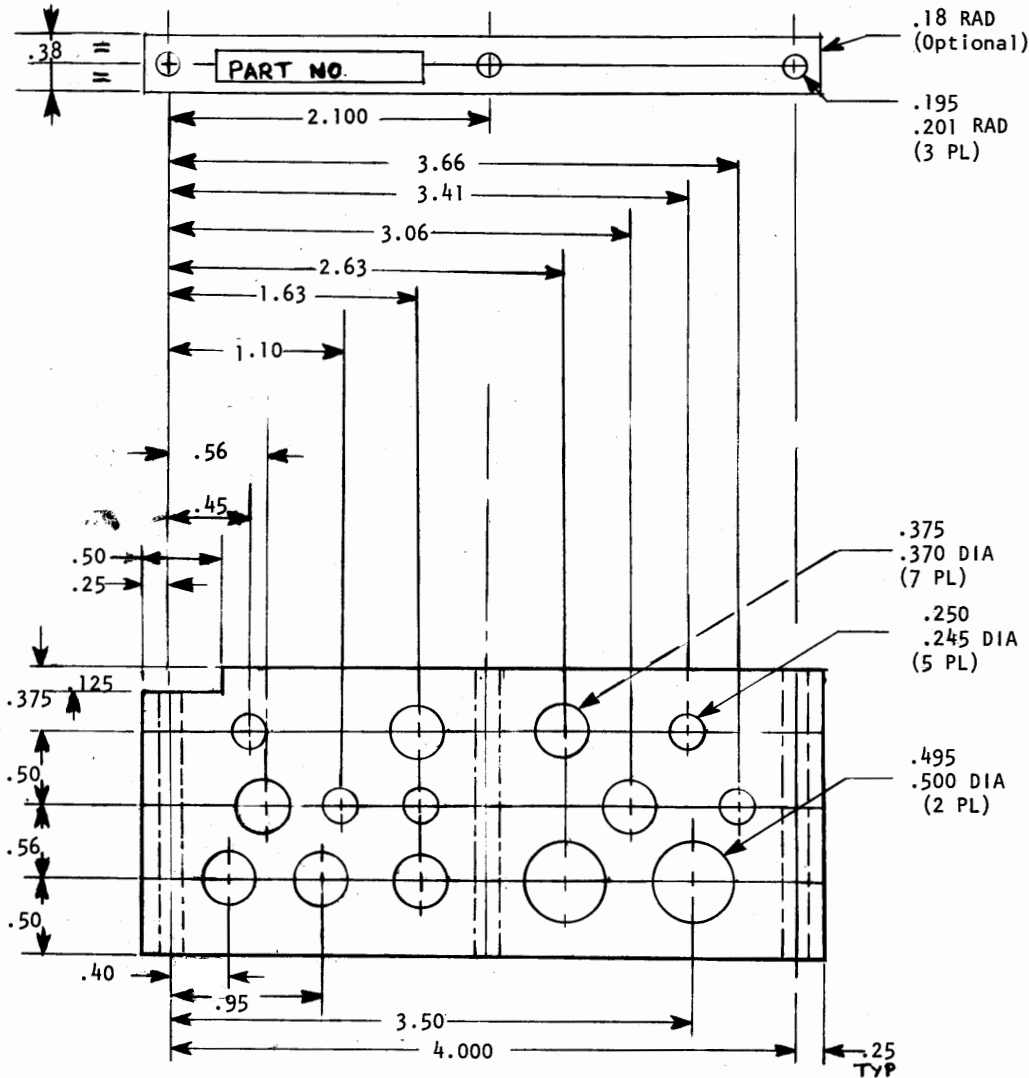

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP375-1 OR CSP313-43
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-307** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: <b>107</b>
APPROVED	S. HAMID		

(A) REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV:

REV:

REV:


REV:

REV:

REV: A - 30 JUN 98

APPROVED: 12 OCT 88



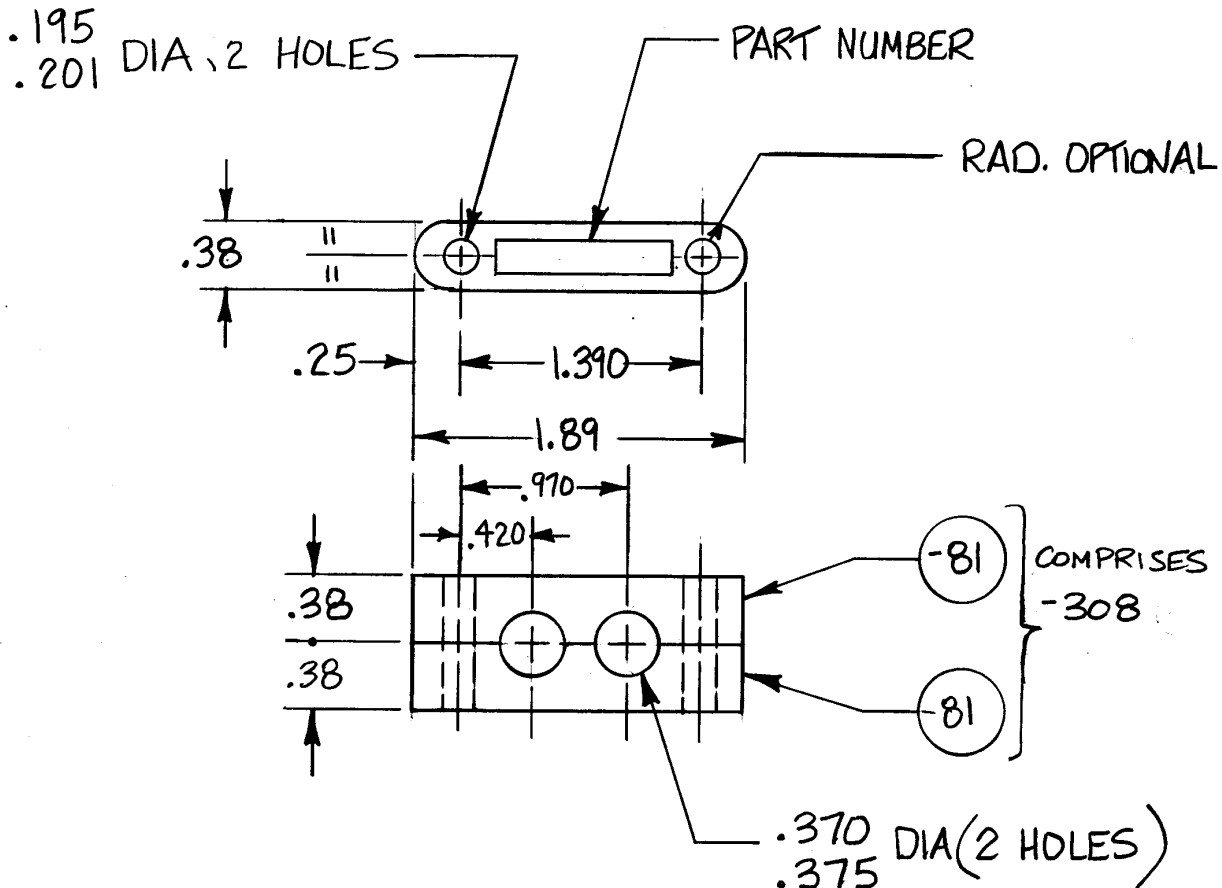

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-4
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH
CHECKED	B. McDONALD
STRESSED	---
APPROVED	S. HAMID

**FAIRLEAD, POLYETHYLENE,  
TUBE SUPPORT,**

**CSP 108**

SHEET: 108

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV:

REV:


REV:

REV:

REV:

REV: A - 30 JUN 98

APPROVED: 9 JAN 89

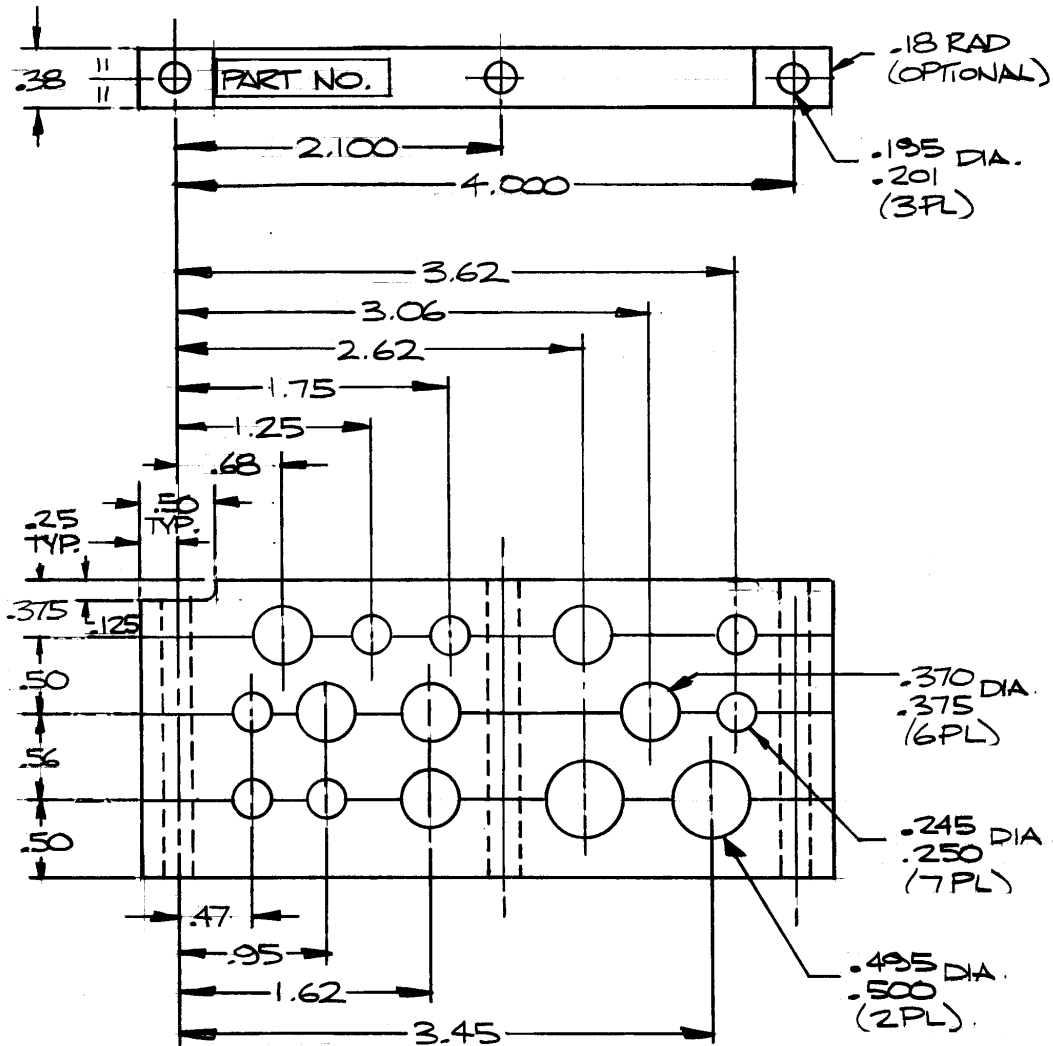

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP375-1 OR CSP313-43
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-309 AS DRAWN**

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: <b>109</b>
APPROVED	S. HAMID		

(A) REDRAWN - ALTERNATE MATERIAL DENSITY (CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: A - 30 JUN 98

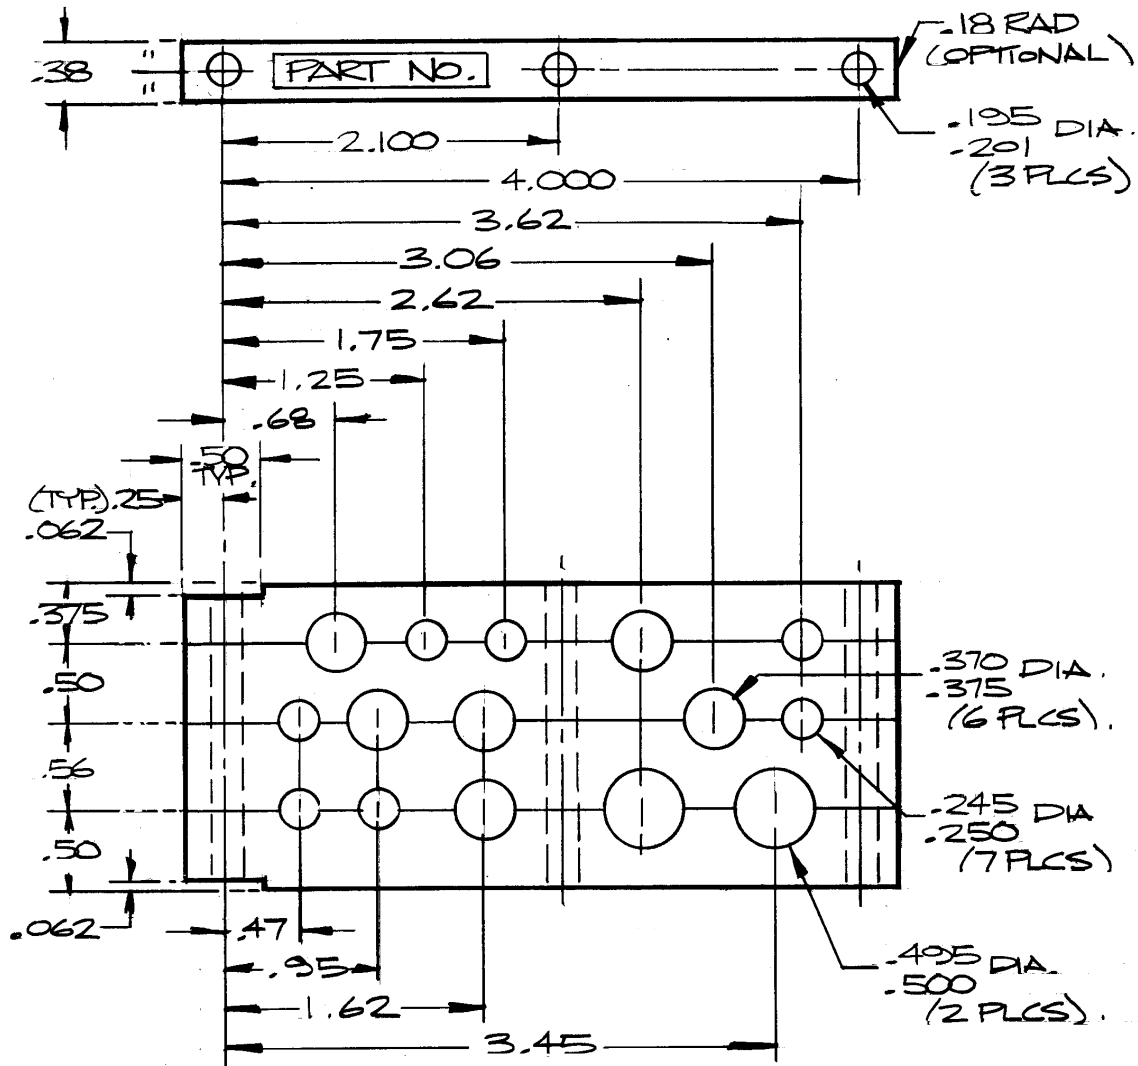

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP375-1 OR CSP313-43
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-310 AS DRAWN**

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 110
APPROVED	S. HAMID		

(A) REDRAWN - ALTERNATE MATERIAL DENSITY (CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: REV: REV: A - 30 JUN 98 REV: 23 MAR 89

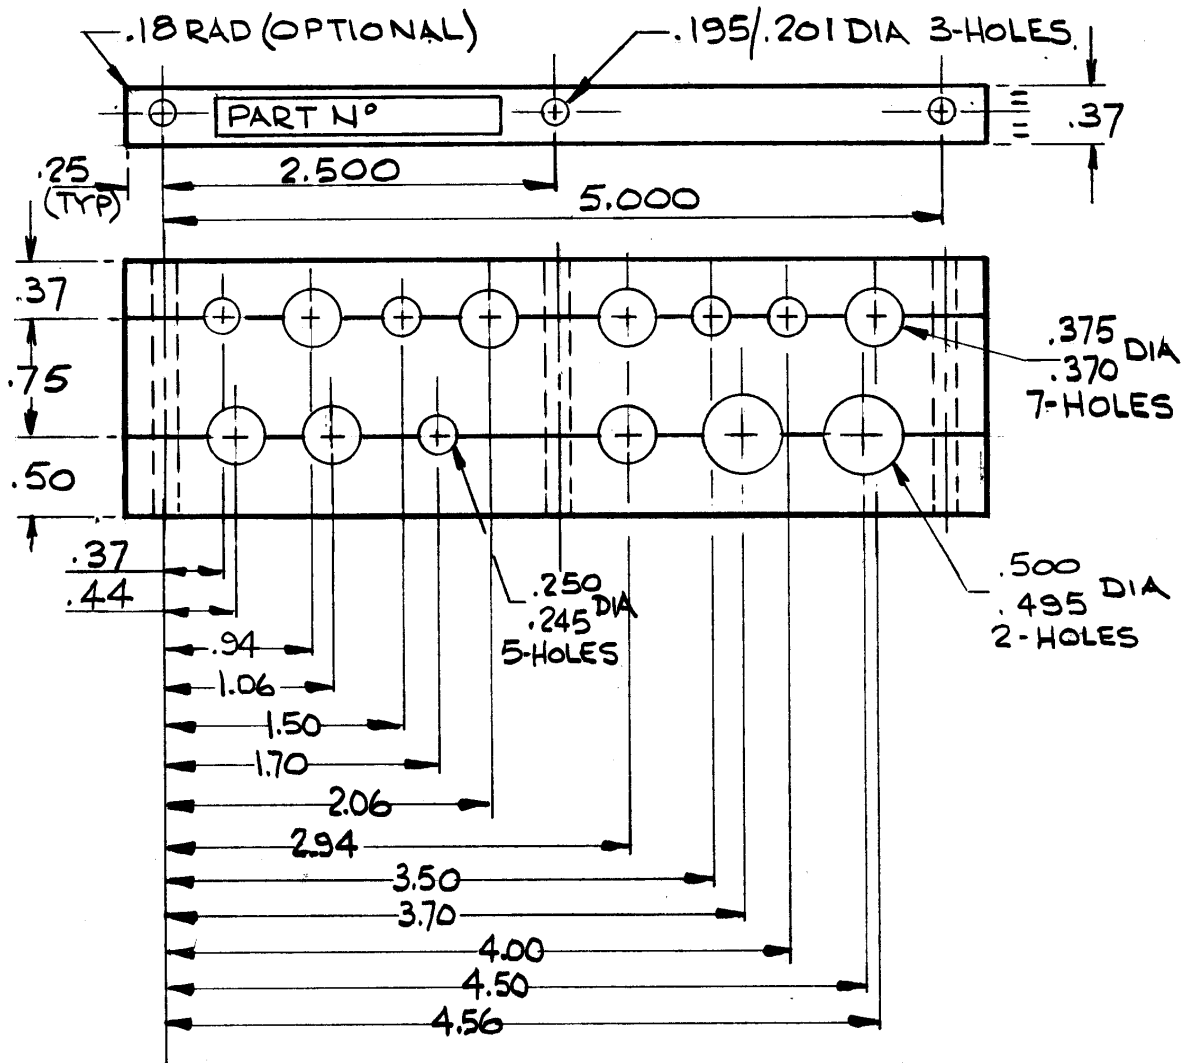

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-55
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK


**-311** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 111
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: REV: REV: A - 30 JUN 98 REV: 21 OCT 94

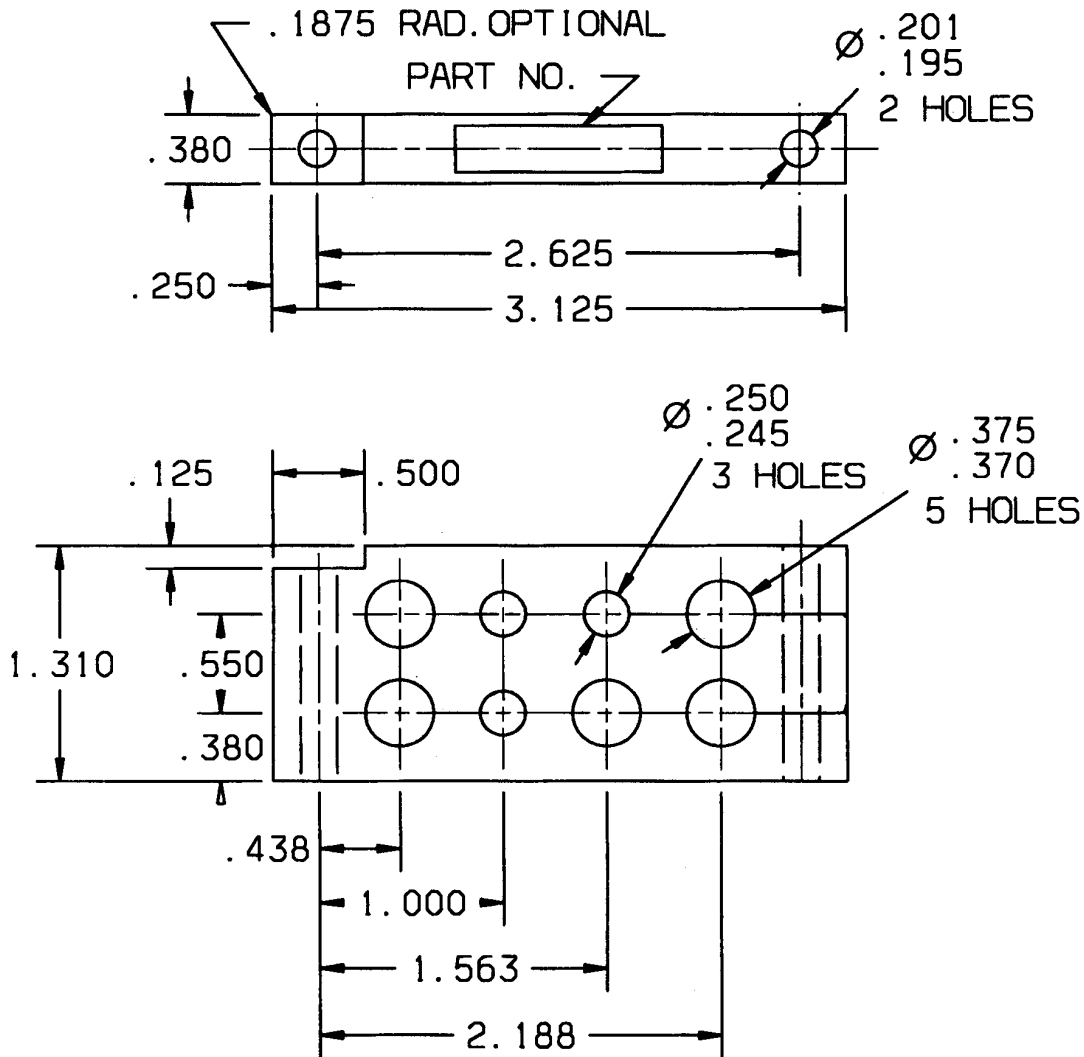

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-46
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-312** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 112
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV:

REV:

REV:


REV:

REV:

REV: A - 30 JUN 98

APPROVED: 17 MAY 95



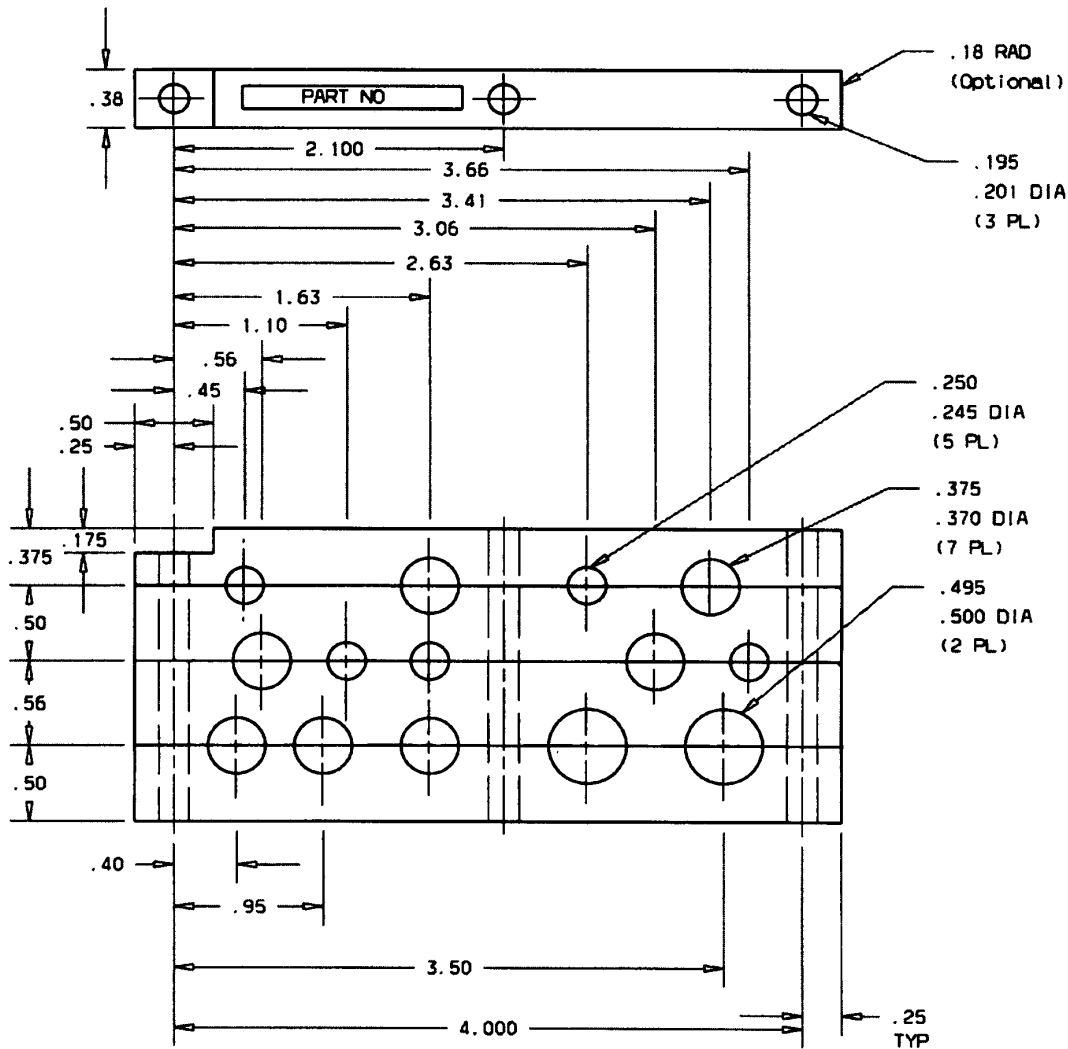

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP375-1 OR CSP313-43
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-314 AS  
DRAWN**

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: <b>114</b>
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED


REV: REV: REV: REV: REV: REV: REV: A - 30 JUN 98 REV: 18 MAR 96

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**

CAGE CODE 71867  
CSP STANDARD

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

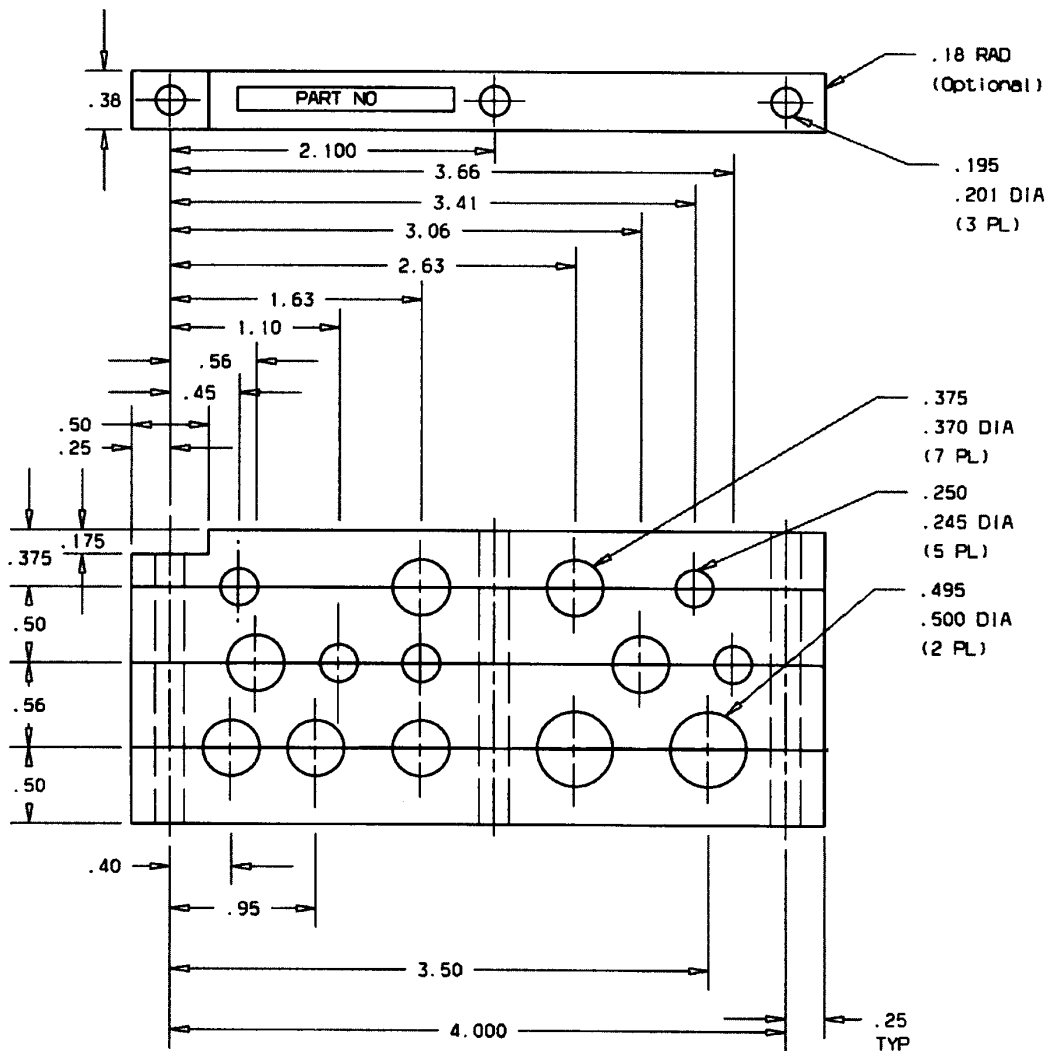

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP375-1 OR CSP313-43
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-315** AS  
DRAWN



SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: <b>115</b>
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV: REV: REV: REV: REV: REV: REV: A - 30 JUN 98 REV: 18 MAR 96



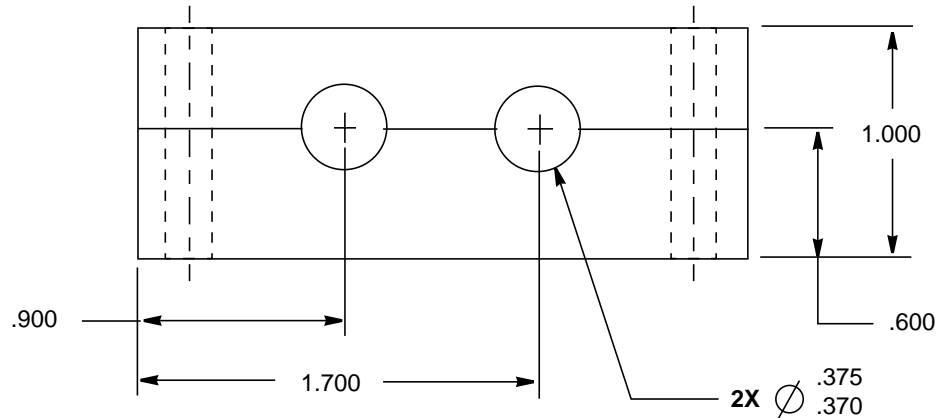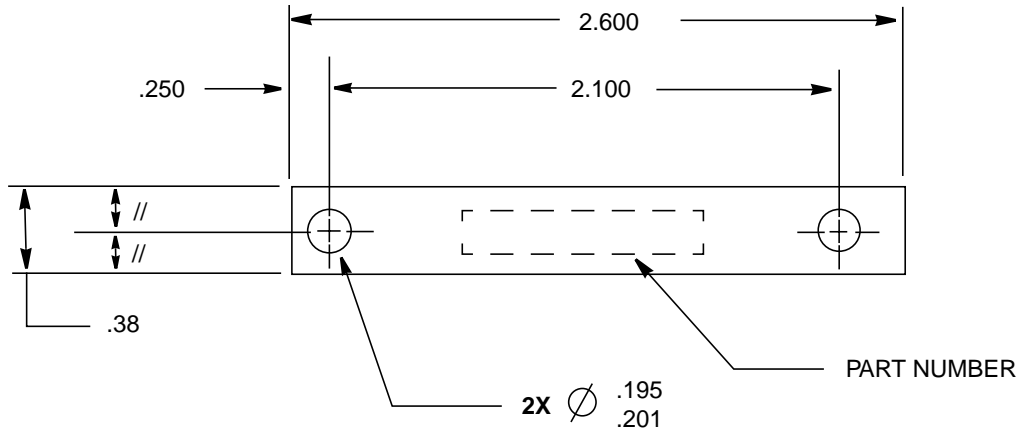

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-92 OR CSP375-12
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-316** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 116
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV:

REV:

REV:

REV:

REV:

REV: A - 30 JUN 98



APPROVED: 12 AUG 97

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**

**CAGE CODE 71867  
CSP STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

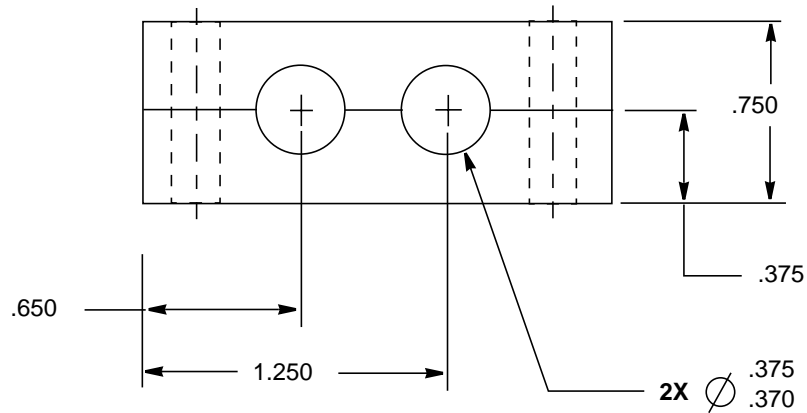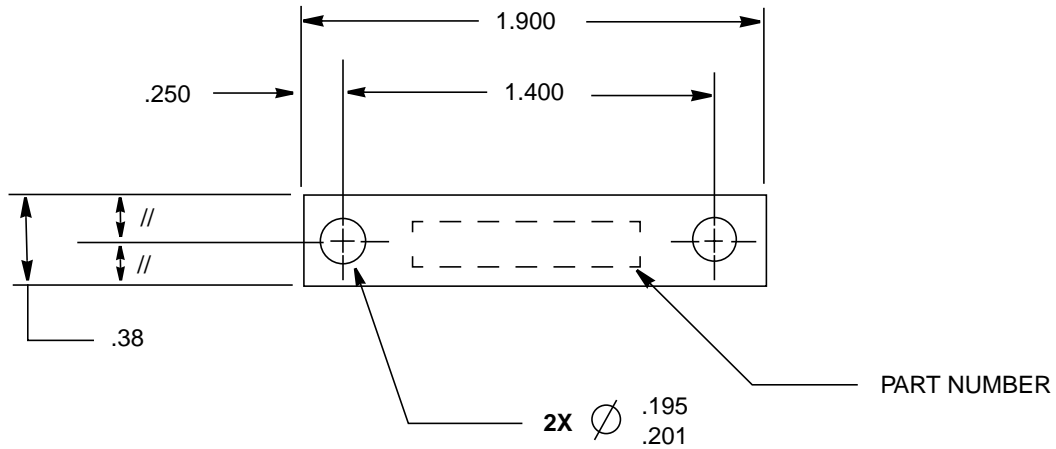

**NOTES:**

1. MATERIAL: 3/8" MEDIUM OR HIGH DENSITY POLYETHYLENE
2. SPECIFICATION: SHEET: L-P-512, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL  
MOLDING: L-P-390, TYPE I, CLASS M OR H, GRADE 2, COLOR NATURAL
3. SHARP CORNERS: .02 RAD. MAX.
4. TOLERANCE UNLESS OTHERWISE NOTED:  $\pm .010$
5. USE WITH CHANNEL SUPPORT CSP313-93
6. HOLE DIAMETER TOLERANCE APPLICABLE AFTER SPLITTING BLOCK

**-317** AS  
DRAWN

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. YEBOAH	<b>FAIRLEAD, POLYETHYLENE, TUBE SUPPORT,</b>	<b>CSP 108</b>
CHECKED	B. McDONALD		
STRESSED	---		SHEET: 117
APPROVED	S. HAMID		

Ⓐ REDRAWN - ALTERNATE MATERIAL DENSITY  
(CLASS 'H' - HIGH DENSITY) ADDED

REV:

REV:

REV:

REV:

REV:

REV: A - 30 JUN 98

APPROVED: 12 AUG 97