
a

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

de HAVILLAND

CAGE CODE 71867
CSP STANDARD

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

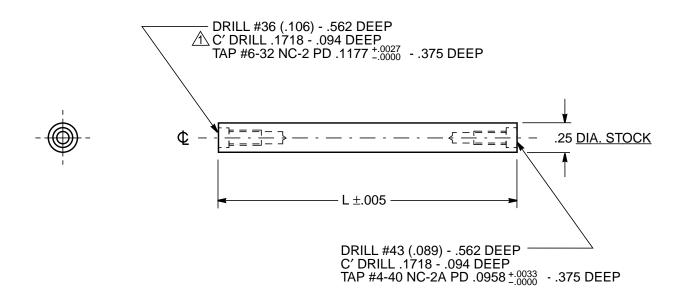

MATERIAL: 2024-T4 ROD PER AMS-QQ-A-225/6 B


FINISH: A1 (ANODIZE PER PPS 32.03) (B)

NOTES: CHAMFER EDGE OF C'DRILL HOLE .015 x 45°

(B) 2. ALL DIMENSIONS ARE IN INCHES

(B) 3. TOLERANCES UNLESS OTHERWISE SPECIFIED: .XXX \pm .010 .XX \pm .03

EXAMPLE OF PART NUMBER:

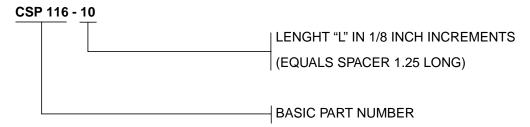

ENG. INFO: MINIMUM LENGTH OF SPACER IS .75

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

ŀ	DRAWN	C. POLITO	SPACER	CSP 116	
	CHECKED	W. CLEMMENT			
	STRESSED		#6-32 & #4-40 INTERNALLY THREADED		
	APPROVED	W. D. S. (26.09.58)		SHEET:	1 of 1

APPROVED: 26 SEP 1958 | REV: B - 23 APR 2009 | REV:

REV

REV:

RE