


STANDARDS SHEET

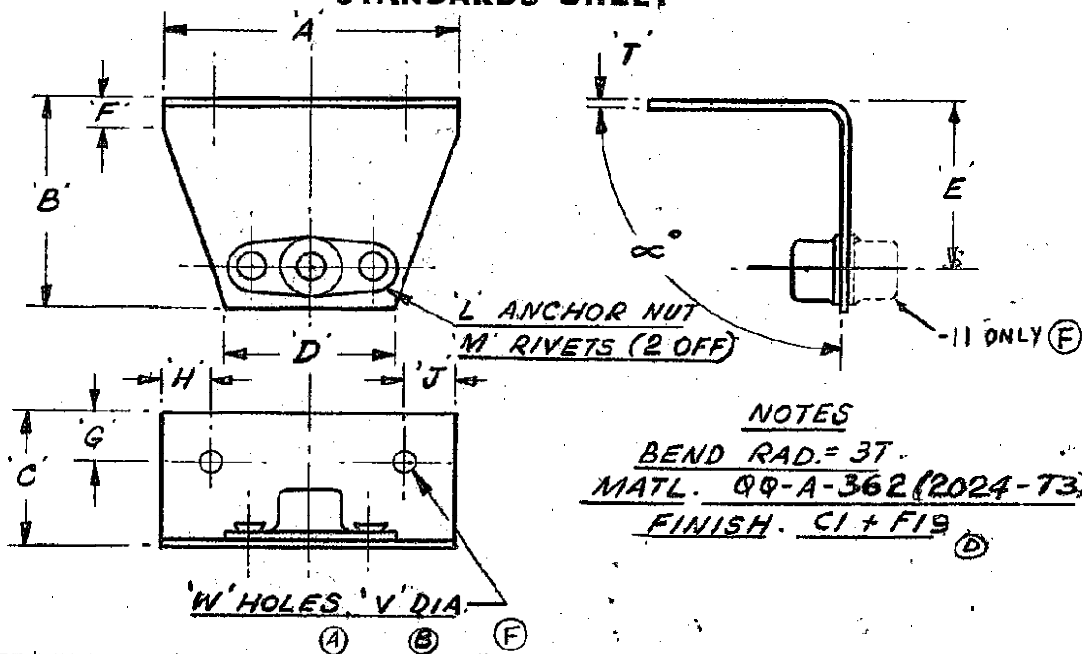

NOTES

BEND RAD. = 37.

MATL. 99-A-362 (2024-T3)

FINISH. CI + F19

PART NO.		-1	-3	-5	-7	-9	-11							
DIMENSIONS	A	1.75	1.00	1.00	1.75	1.75								
	B	1.25	0.75	0.65	1.25	1.25								
	C	0.85	0.65	1.15	1.25	1.25								
	D	0.75	0.75	0.75	0.75	0.75								
	E	1.00	0.50	0.40	1.00	1.00								
	F	0.20	0.20	0.20	0.20	0.20								
	G	-	0.25	0.25	0.25	-								
	H	-	0.25	0.25	0.25	-								
	J	-	0.25	0.25	0.25	-								
	T	0.04	0.04	0.04	0.050	0.050								
V	-	0.1285	0.1285	0.1285	-									
W	-	2	2	2	-									
α°	90°	90°	90°	90°	90°									
L	NAS 697-AD3	NAS 697-AD3	NAS 697-AD3	NAS 697-AD3	NAS 697-AD3									
M	AN 426-AD3	AN 426-AD3	AN 426-AD3	AN 426-AD3	AN 426-AD3									

IDENTICAL TO -9 EXCEPT A/NUT ON OPP. SIDE

THE LETTER 'A' ADDED AFTER THE DASH NO. INDICATES THE BRACKET WITHOUT ANCHOR NUTS e.g. CSP142-1A.

DRAWN	K. CHAMBERLIN	CLASSIFICATION	STANDARD
CHECKED	R. WRIGHT	BRACKET ANGLE ASSY.	CSP 142
STRESSED			
APPROVED	<i>CB</i>		

FMC 71867