


STANDARDS SHEET

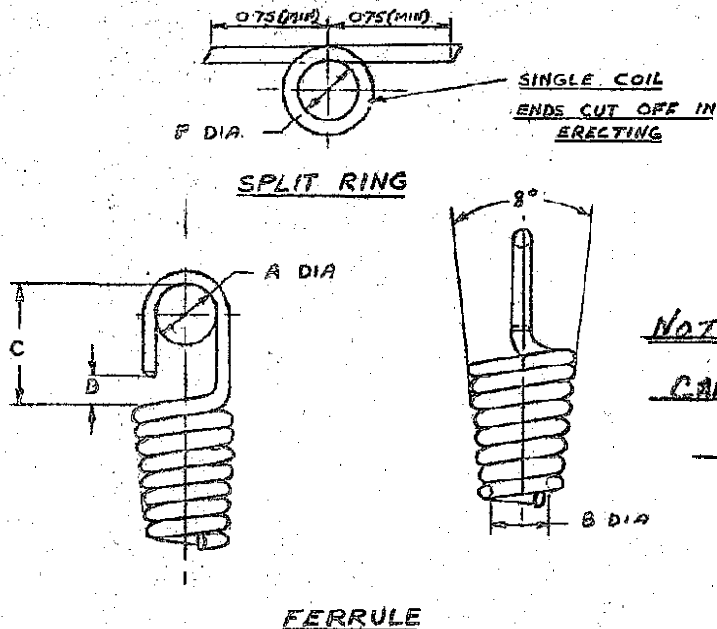

NOTE:

CANCELLED - USE

CSP 194

ASSY No.	PART No.	FOR CORD DIA.	FERRULE						PART No.	SPLIT RING		SAFE LOAD
			WIRE DIA.	NUMBER OF COMPLETE COILS	DIMENSIONS					WIRE DIA.	F	
					A	B	C	D				
-1	-11	3/16	0.063	5	0.18	0.15	0.33	0.09	-21	0.055	0.19	2.5
-3	-13	1/4	0.80	5	0.25	0.20	0.44	0.12	-23	0.063	0.26	3.5
-5	-15	5/16	0.107	5	0.31	0.25	0.55	0.15	-25	0.80	0.32	6.5
-7	-17	3/8	0.121	6	0.37	0.30	0.65	0.20	-27	0.80	0.38	35.0
-9	-19	1/2	0.135	8	0.50	0.38	0.85	0.25	-29	0.107	0.52	65.0

MATERIALS:- FERRULE TO BE MADE FROM HIGH TENSILE STEEL WIRE QQ-W-470
SPLIT RING TO BE MADE FROM SOFT IRON WIRE

FINISH :- FERRULE TO BE CADMIUM PLATED TO P.P.S. 33.01.

CSP 154-1 PART IS IDENTICAL TO AGS 897 A
CSP 154-3 PART IS IDENTICAL TO AGS 897 B
CSP 154-5 PART IS IDENTICAL TO AGS 897 C
CSP 154-7 PART IS IDENTICAL TO AGS 897 D
CSP 154-9 PART IS IDENTICAL TO AGS 897 F

CONSISTING OF
FERRULE & SPLIT
RING.

DRAWN	D. A. M.	CLASSIFICATION	STANDARD
CHECKED	<i>[Signature]</i>	FERRULE-ELASTIC CORD	CSP 154
STRESSED	<i>[Signature]</i>		
APPROVED	<i>[Signature]</i>		

FMC 71867

CANCELLED
A REPLACED BY
CSP 194
AGS 194
ASB.