


STANDARDS SHEET

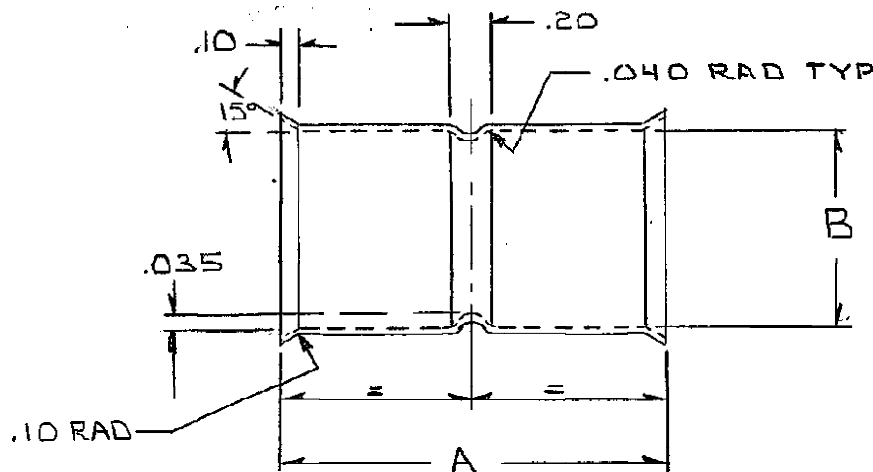

MATL: 6061-T4 WW-T 700/6

FINISH: A1 ONLY

FLUORESCENT PENETRANT INSPECT TO PFS 20.33

NOTE: A FLAT SPOT IS PERMITTED ON THE GROOVE

-No	A	B $\pm .0004$	WALL TH	FOR TUBING	REF. DS 66
-1	2.25	1.250	.035	1.00 DIA	
-2	2.25	1.500	.035	1.25 DIA.	-3

(REF)
MATES WITH
77900152-001
77900153-001

DRAWN	D.LINTS	F	CLASSIFICATION	STANDARD
CHECKED	<i>Schmitt</i>		COUPLING	CSP 309
STRESSED	<i>W. M. Hood</i>		FLUID LINES	
APPROVED	<i>BS</i>			

STDS M & P 20.4-7.3

20.5.82
Schmitt
WAS + 0.004
- 0.004

(A)