


STANDARDS SHEET

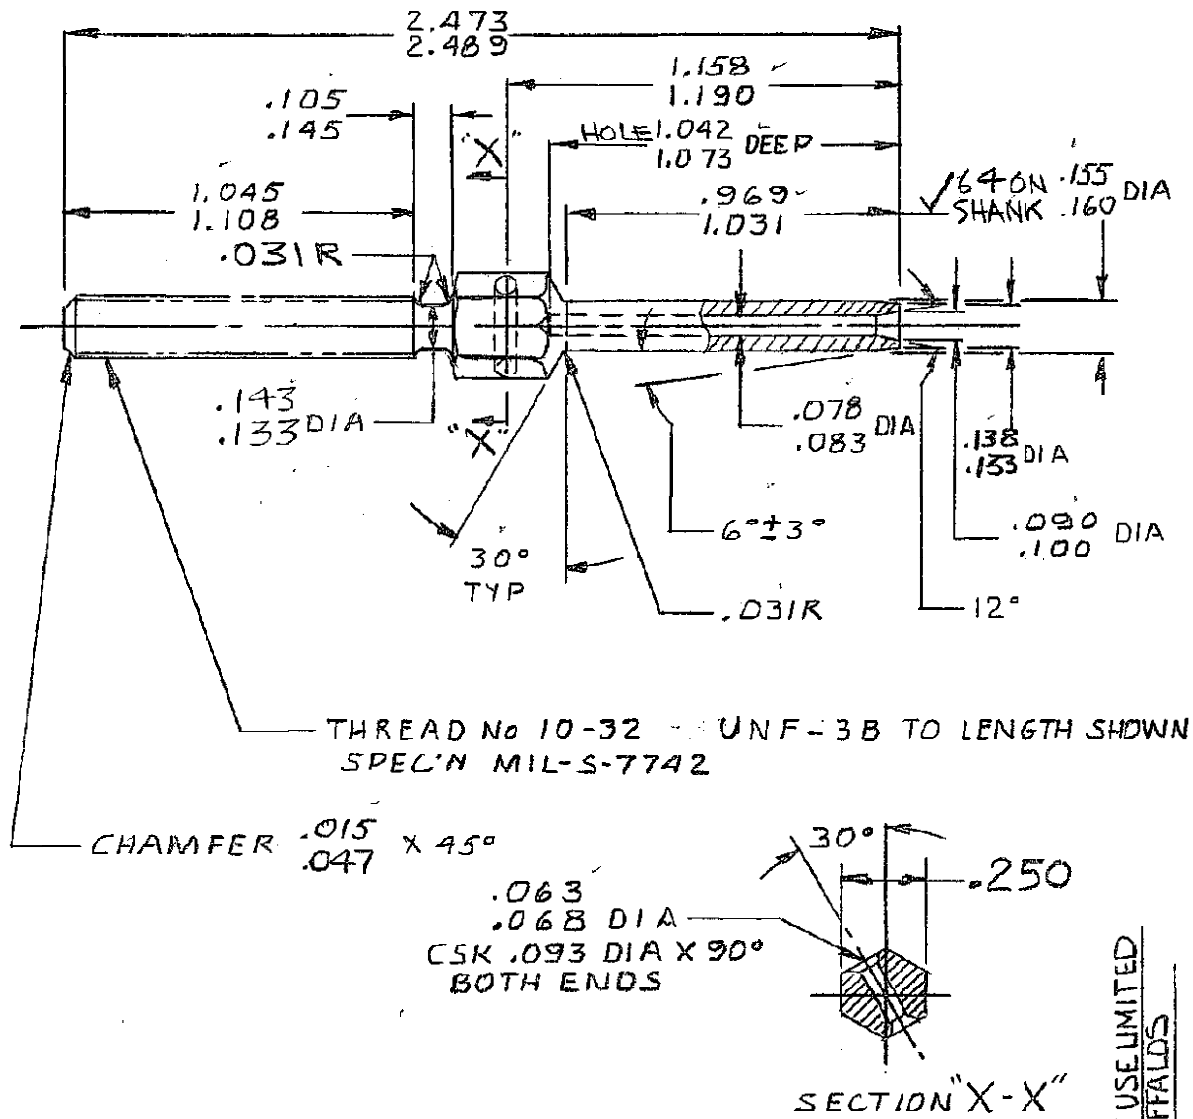

CABLE SIZE $\frac{1}{16}$ NOMINAL

REMOVE ALL SHARP EDGES

SHAFT & CABLE HOLE SHALL BE CONCENTRIC & PARALLEL TO
AXIS WITHIN .008 (.016 TIR)

PASSIVATE TO PPS 31.05

CORROSION RESISTANT STEEL QQ-S-764

CLASS 303 Se COND. A. TENSILE STRENGTH NOT TO
EXCEED 115 KSI.

DRAWN	P. LEROUX	CLASSIFICATION	STANDARD
CHECKED	ASHWIN	TERMINAL-STUD SWAGING	CSP327
STRESSED	W. S. G.		
APPROVED			

VAR OPS RWRIGHT 21-375 STD SMP SCHWARTZ 10.475

AT PRESENT USE LIMITED
TO ZAIRE BUFFALDS