
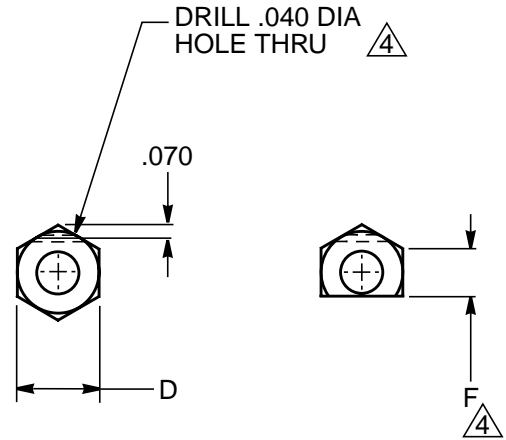


THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

de HAVILLAND

**CAGE CODE 71867
CSP STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

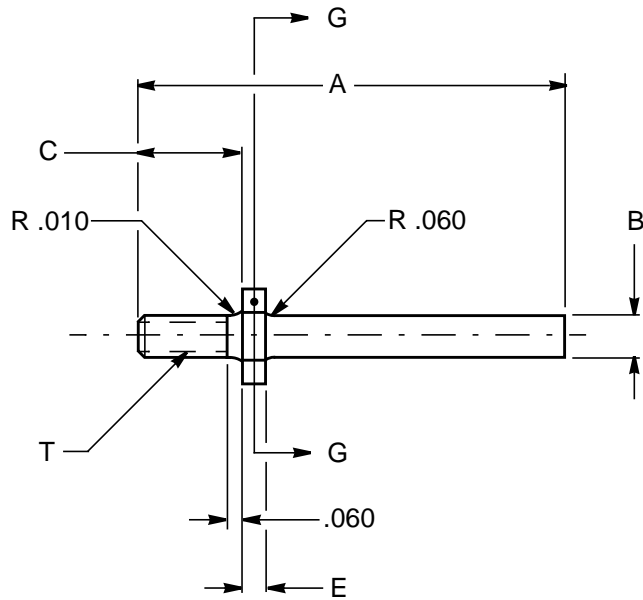

SEC. G-G

CSP 340 PULLEY GUARD PIN

(P)

LIST OF CURRENT SHEETS			
SHEET	1	2	3
REVISION	P	H	-

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	M. ROSSO
CHECKED	T. FLANNERY
STRESSED	B. CLEMMENT
APPROVED	S. SCHRATTNER

PULLEY GUARD PIN

CSP 340

SHEET: 1 of 3

REDRAWN - REVISION TABLE ADDED
SHEET2 HAS BEEN RAISED AT ISSUE "H"
SHEET3 ADDED
(P)

REV:

REV:

REV:

REV:

REV:

REV: P - 10 SEP 2009


APPROVED: 17 MAR 1982

H CSP340-20 ADDED

NOTES:

1. TOLERANCES ON ALL DIMENSIONS TO BE $\pm .010$.
2. PINS WITH 10-32-UNF-3A THREADS ARE PREFERRED FOR FUTURE DESIGN.
3. THREADS IN ACCORDANCE WITH MIL-S-7742.
4. WHEN SPECIFIED BY CODE.
5. TOLERANCE $+.005 / -.000$.

EXAMPLE OF PART NUMBER:

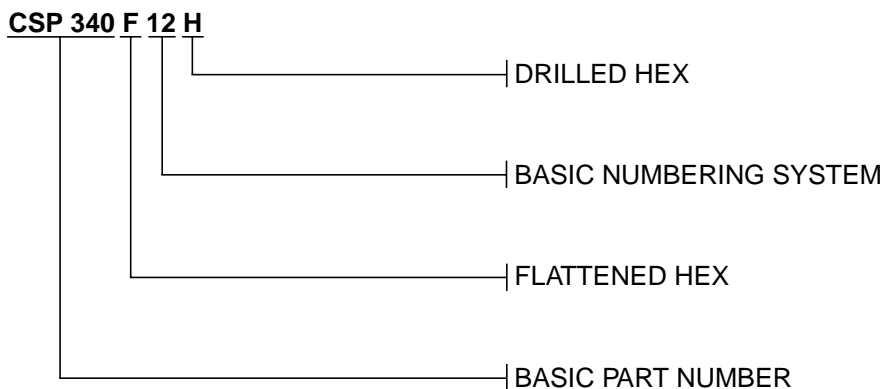

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	M. ROSSO	PULLEY GUARD PIN	CSP 340
CHECKED	T. FLANNERY		
STRESSED	B. CLEMMENT		SHEET: 3 of 3
APPROVED	S. SCHRATTNER		

REV:

REV:

REV:

REV:

REV:

REV:

APPROVED: 17 MAR 1982