


STANDARDS SHEET

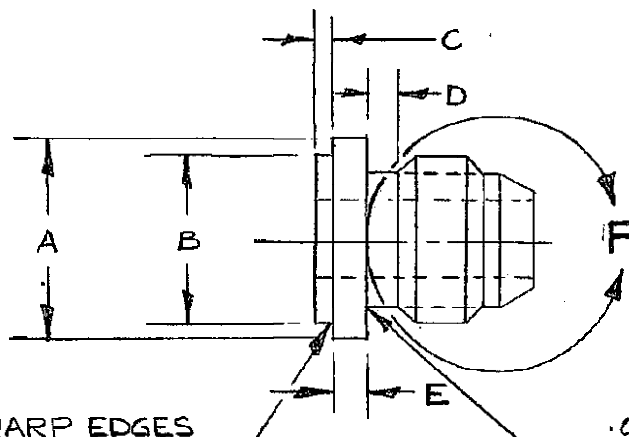

REMOVE ALL SHARP EDGES

.031 RAD
.016

PART Nº	A DIA ±.010	B DIA ±.010	C ±.005	D +.015 -.000	E ±.010	MAT'L	F DIMS PER
CSP350-4	.562	.437	.030	.075	.050	SEE	MS33656E4
CSP350-5	.625	.500	.030	.075	.050	NOTE	MS33656E5
CSP350-6	.687	.562	.030	.083	.050	2	MS33656E6

NOTES

1. PROTECTIVE FINISH (ALODINE OR ANODIZE) TO BE SPECIFIED ON ASSEMBLY DWG.
2. MATERIAL IS 6061 T4, QQ-A-225/B OR QQ-A-200/B

DRAWN	KROMKAMP	CLASSIFICATION	STANDARD
CHECKED	D. LINTS	FLANGED BOSS	CSP 350
STRESSED	<i>WBL</i>		
APPROVED	SCHWARTZ <i>APL</i>		

STDS 17 & P 29.3.78