


STANDARDS SHEET

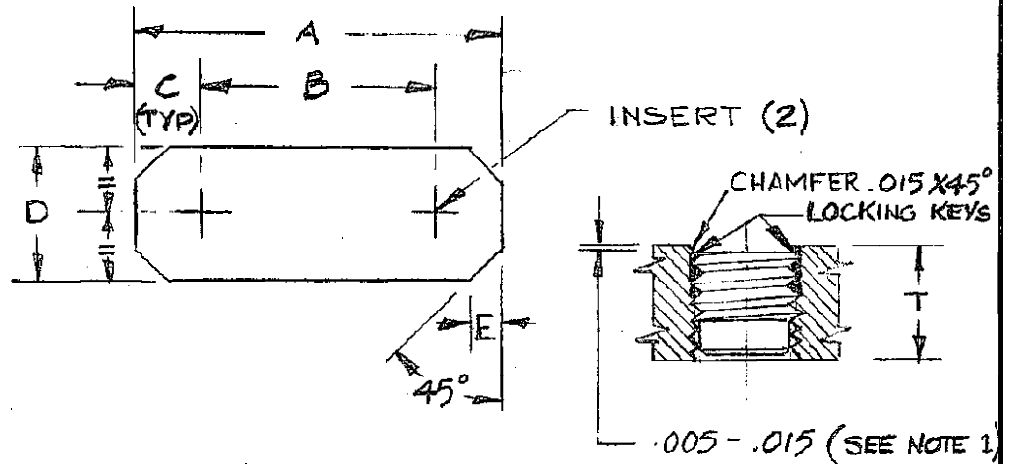

NOTES

1. INSTALL INSERT .005 - .015 BELOW SURFACE THEN DRIVE LOCKING KEYS DOWN SQUARELY AND FLUSH WITH SURFACE.
2. SCREW ENTRY IN SIDE WITH VISIBLE LOCKING KEYS.

PART NO	TH'D SIZE	A	B	C	D	E	T	INSERT	INSTALLATION HOLE TAP DRILL MIL-S-7742
CSP356-1	2-56 UNC-3B	.68	.375	.15	.46	.18	.125	KNCAL0256	8-32 UNC-3B
CSP356-2	2-56 UNC-3B	.75	.375	.19	1.00	.06	.125	KNCAL0256	8-32 UNC-3B

MATERIAL : 2024 T3, QQ-A-250/5

FINISH : C1

* SEE CSP300 FOR SIMILAR MOUNTING PLATE WITH 4-40 THREAD SIZE

DRAWN	CLASSIFICATION	STANDARD
CHECKED	PLATE - MOUNTING, MICRO-SWITCH, THREADED INSERT	CSP 356
STRESSED		
APPROVED		

G FEB 79

TITLE BLOCK REVISED 29.1.80