


STANDARDS SHEET

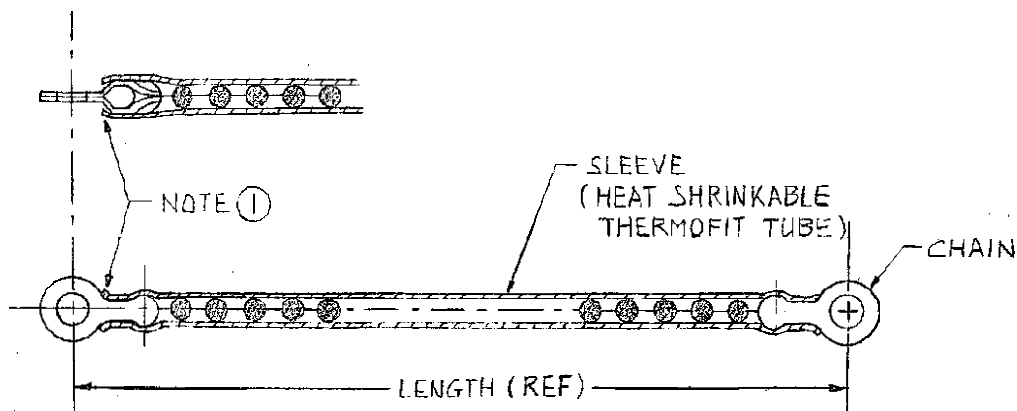

- MFG NOTES :
- ① HEAT SHRINKABLE SLEEVE TO BE INSTALLED ON ENTIRE CHAIN INCLUDING STEM PART OF END FITTINGS.
 - ② ENSURE CHAIN IS AT FULL LENGTH & STRAIGHT DURING INSTLN OF SLEEVE
 - ③ MAKE SLEEVE FROM THERMOFIT RNF 100 TYPE II CLEAR & HEAT SHRINK ON CHAIN TO PPS 10.6.

DASH NO.	CHAIN USED	LENGTH (REF)	O/D (THERMOFIT BEFORE HEAT SHRINKING)
-1	NAS1201 B10A 14A	7.0	1/4

① 'LENGTH (REF)' REDEFINED
P.L. 8.2.80

DRAWN	P. LAM	CLASSIFICATION	STANDARD
CHECKED	<i>[Signature]</i>	BEAD CHAIN ASSEMBLY	CSP 361
STRESSED	<i>[Signature]</i>	- INSULATED -	
APPROVED	<i>[Signature]</i>		

22 OCT 79