


STANDARDS SHEET

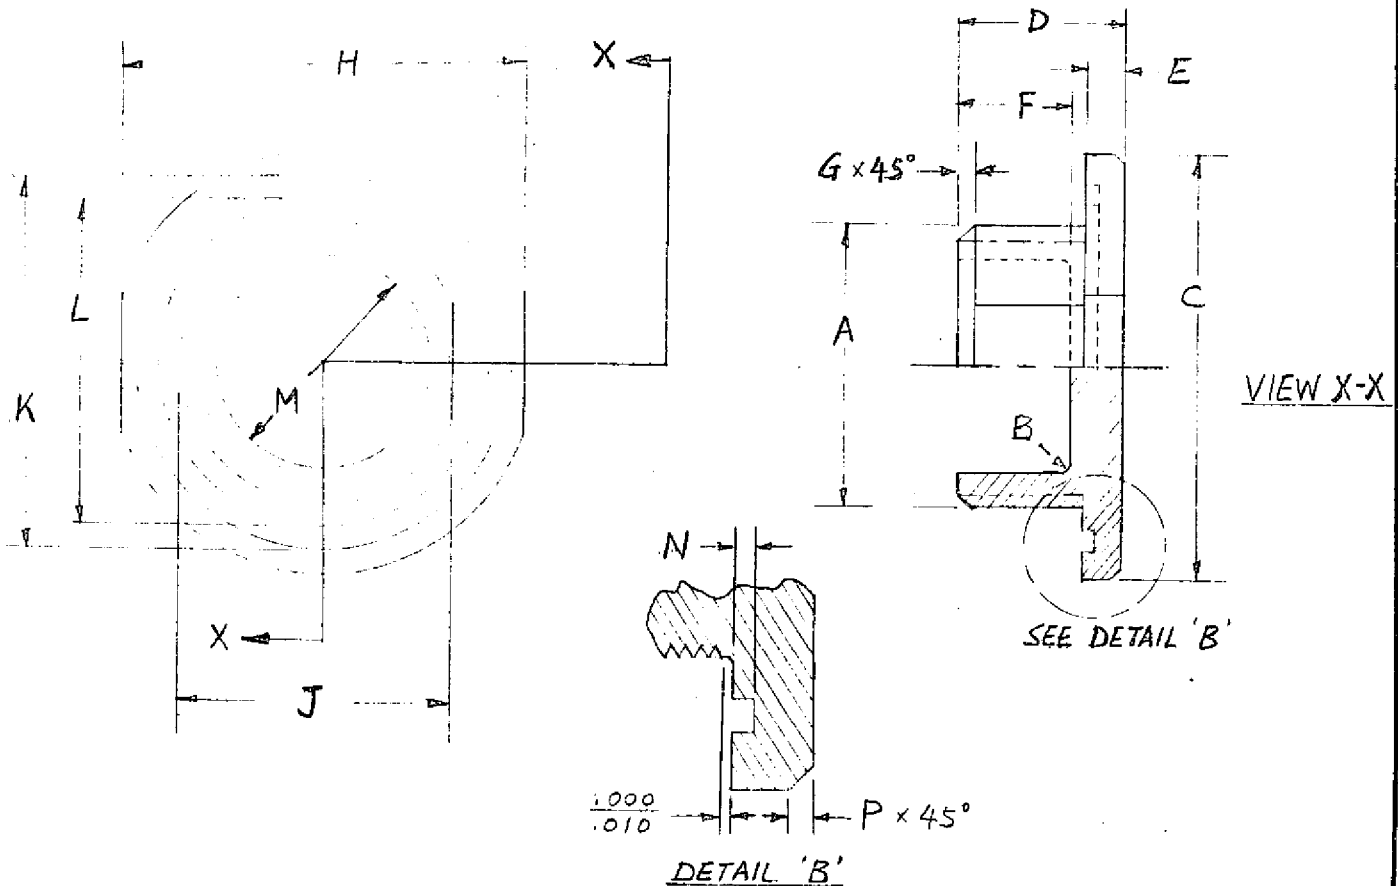

	A THREAD UNEF-2A *	B RAD	C DIA ±.015	D	E	F	G	H ±.015	J +.000 -.010	K DIA	L DIA	M DIA	N	P
-18	1.250-18	.062	1.750	.625	.125	.450	.050	1.625	1.187	1.486	1.296	.875	.051	.050
-20	1.375-18	.062	1.937	.625	.125	.450	.050	1.812	1.312	1.674	1.484	1.000	.051	.050
-22	1.500-18	.062	2.062	.625	.125	.450	.050	1.937	1.437	1.799	1.609	1.125	.051	.050
-24	1.625-18	.062	2.187	.625	.125	.450	.050	2.062	1.562	1.924	1.734	1.250	.051	.050

* or UNEF-3A

DRAWN	P.L.	CLASSIFICATION	STANDARD
CHECKED	JJ	PLUG - BULKHEAD CONNECTOR REPLACEMENT	CSP 367 Sht. 1 of 2
STRESSED	8		
APPROVED	SCOTT		

2-18-40

STANDARDS SHEET

- 1 MATERIAL: QQ-A-225/8 6061 T6
- 2 FINISH: A1
- 3 THREAD TO BE IN ACCORDANCE WITH MIL-S-7742 & HANDBOOK H28
- 4 RELATED HARDWARE:

PLUG	NUT	O-RING
CSP367-18	MS27512-14A	MS29513-027
CSP367-20	MS27512-16A	MS29513-029
CSP367-22	MS27512-18A	MS29513-030
CSP367-24	MS27512-20A	MS29513-031

DRAWN	P.L.	CLASSIFICATION	STANDARD
CHECKED	2.7	PLUG - BULKHEAD CONNECTOR REPLACEMENT	CSP 367 Sht. 2 of 2
STRESSED	7		
APPROVED	2.7 8.50		