




STANDARDS SHEET


-4	BLACK	
-3	YELLOW	OIL
-2	RED	FUEL
PT NO	COLOR	SYSTEM

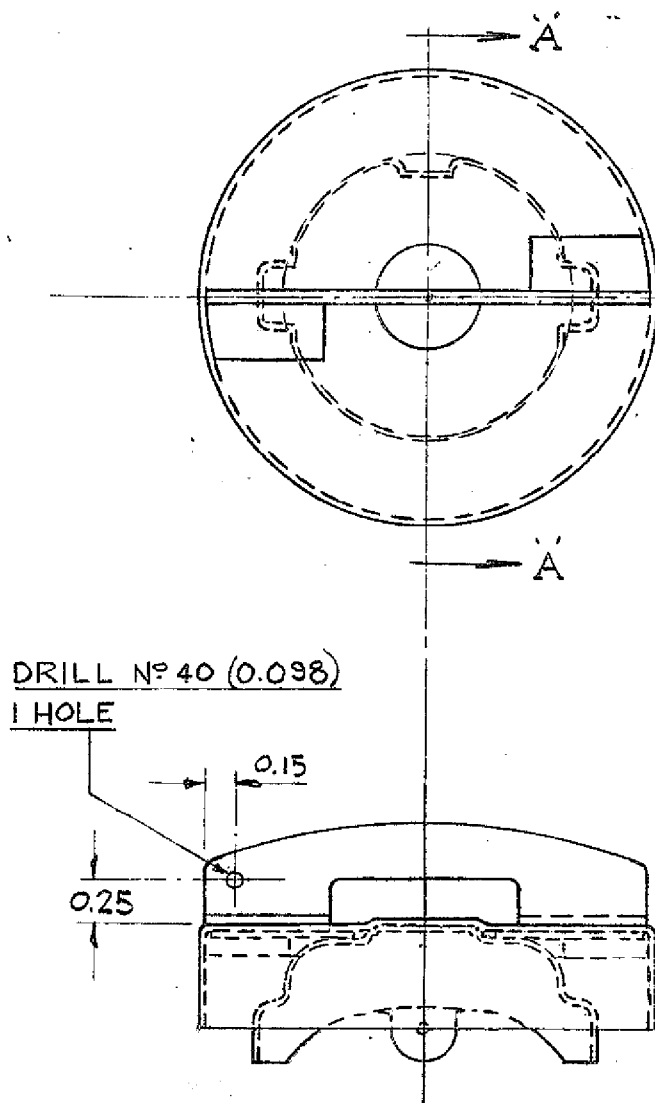

DRILL N° 40 (0.098)
1 HOLE

0.15
0.25

TEST INSTRUCTIONS
-FINISHED CAP ASS'Y IS TO BE
ASSEMBLED TO A TEST RIG. ASS'Y
& THEN TO BE IMMERSSED IN
VARCOL. A PRESSURE OF 10
P.S.I. IS TO BE APPLIED AND
HELD FOR TWO MINUTES. CAP
MUST BE FREE FROM LEAKAGE

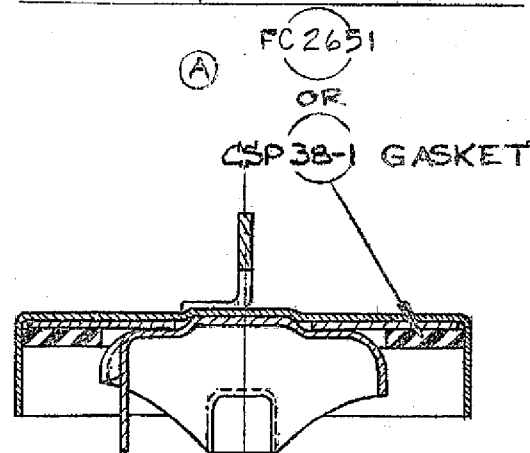SECTION A-A

SUPPLIED BY
STEEL PRODUCTS ENGINEERING CO.
SPRINGFIELD OHIO
(THIS PART REPLACES CSP 20)


NOTE
CAP TO FIT FILLER NECK
39B4233 (AIR ASSOCIATES
PART.)

DRAWN	TM	CLASSIFICATION	STANDARD
CHECKED	<i>[Signature]</i>	CAP ASSEMBLY	CSP 38
STRESSED		FUEL & OIL TANK FILLER	
APPROVED	<i>[Signature]</i>		

FMC 71867

GASKET NOMENCLATURE
ADDED, SHEET WAS 1 OF 1
12.3.76

① C.A.S. 162

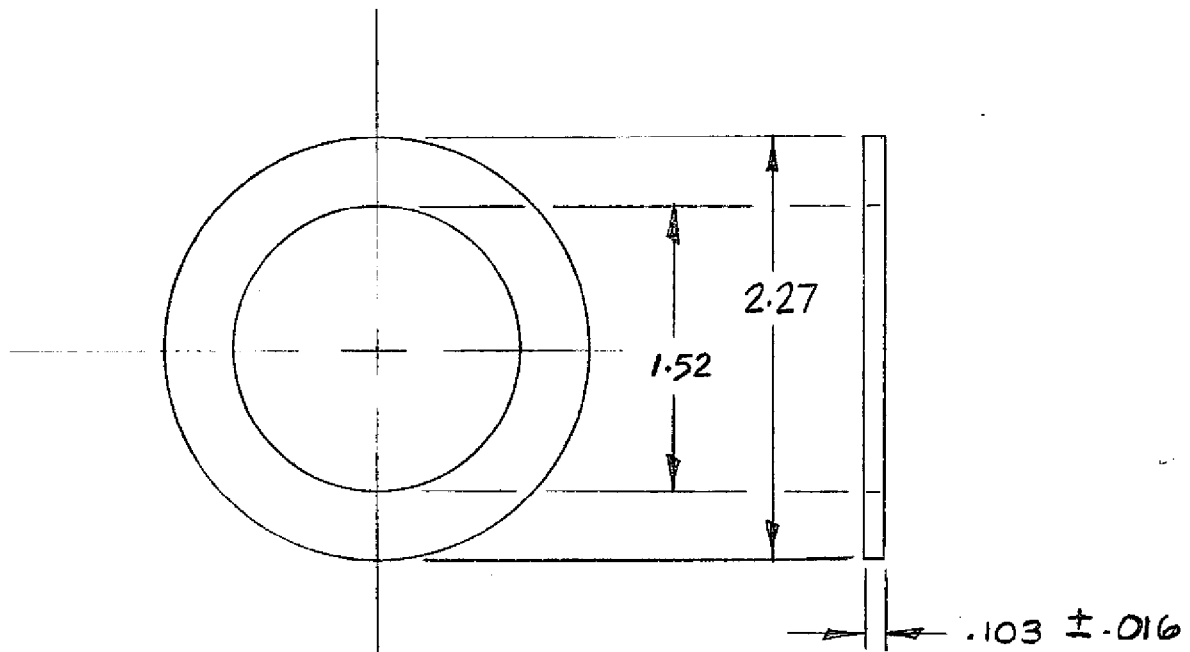

CSP 38-1 GASKET

MATERIAL : NITRILE RUBBER, MIL-R-6855 CLASS 1 GRADE 60

NOTE

- THIS GASKET IDENTICAL TO FC2651

DIMENSION TOLERANCE $\pm .030$

DRAWN	KROMKAMP	CLASSIFICATION	STANDARD
CHECKED		CAP ASSEMBLY FUEL & OIL TANK FILLER	CSP 38
STRESSED			
APPROVED	SCHREIBER		

16-3-76

(A) METAL THICKNESS WAS .10
 3.10. 