


STANDARDS SHEET

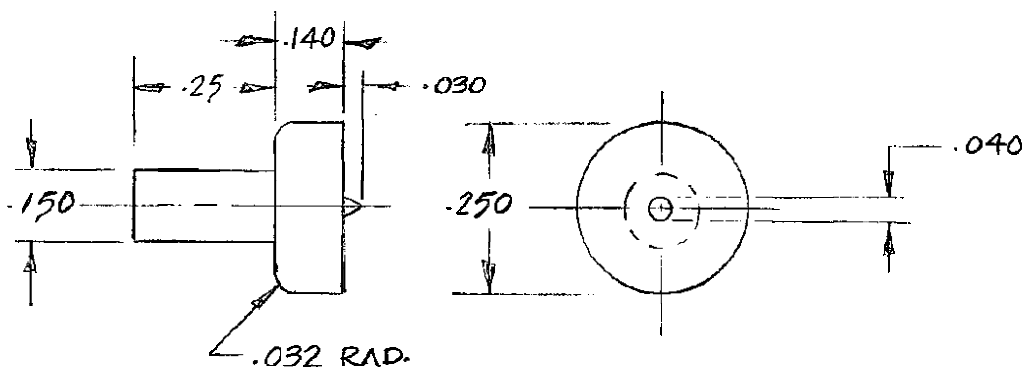

CSP 392-1

MATERIAL: PART TO BE INJECTION MOLDED POLYETHYLENE
L-P-390, TYPE I, CLASS M OR H, GRADE 2.

COLOUR: NATURAL

APPLICATION: USED TO PLUG ANCHOR NUT CLEARANCE HOLE
AND ANCHOR NUT TO PREVENT INGRESS OF
LIQUID SHIM DURING C5 BUFFALO WINDSHIELD
INSTALLATION.

* PART CAN BE MACHINED FROM TEFLON ROD MIL-P-1946B
IN SMALL QUANTITIES TO RELIEVE SHORTAGES.

DRAWN	KROMKAMP	CLASSIFICATION	STANDARD
CHECKED	R. J. SHAW	PLUG	(A) CSP 392
STRESSED	<i>[Signature]</i>		
APPROVED	<i>[Signature]</i>		

Fig 753

CSP 392 WAS CSP 391
31 MARCH 83. YS