




STANDARDS SHEET

END IN ACCORDANCE
WITH MS 33656-6 STYLE 'E'
EXCEPT AS NOTED.

INSTALL JEHA 1875-550L RESTRICTOR
IN ACCORDANCE WITH P.P.S. 2.27.

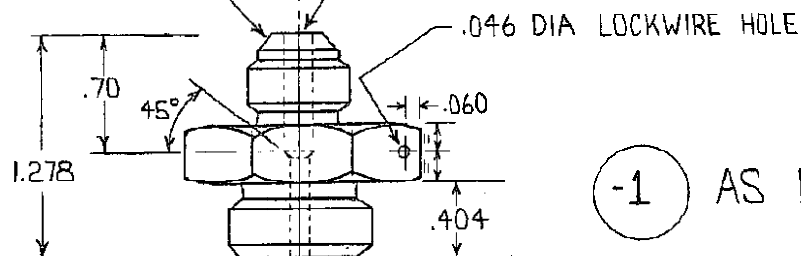

-1 AS DRAWN

DRILL .156/.162 DIA HOLE
THRU. COUNTER BORE .1875/.1880
DIA TO DEPTH SHOWN.

END IN ACCORDANCE WITH
MS 33656-8 STYLE 'E'
EXCEPT AS NOTED.

NOTES

- 1, MATERIAL : 7075 HEX BAR 1" A/F OR 1" SQ. BAR. QQ-A-225/9
FINAL HEAT TREAT. T7351.
- 2, FINISH : A1 ALL OVER, MASK THREADS AND PAINT F24 (URETHANE)
COLOUR YELLOW.
- 3, IDENTIFICATION : CSP PART NO STEEL STAMPED ON FLAT.
- 4, PRESSURE TEST TO 3000 PSID TO P.P.S. 2.27.

DRAWN	M.ROSSD	CLASSIFICATION	STANDARD
CHECKED	KROMKAMP	-REDUCER-	CSP 405
STRESSED	WELSH	FLARED TUBE - RESTRICTED	
APPROVED	SCHWARTZ		
STANDARDS 27 AUG 84			