


STANDARDS SHEET

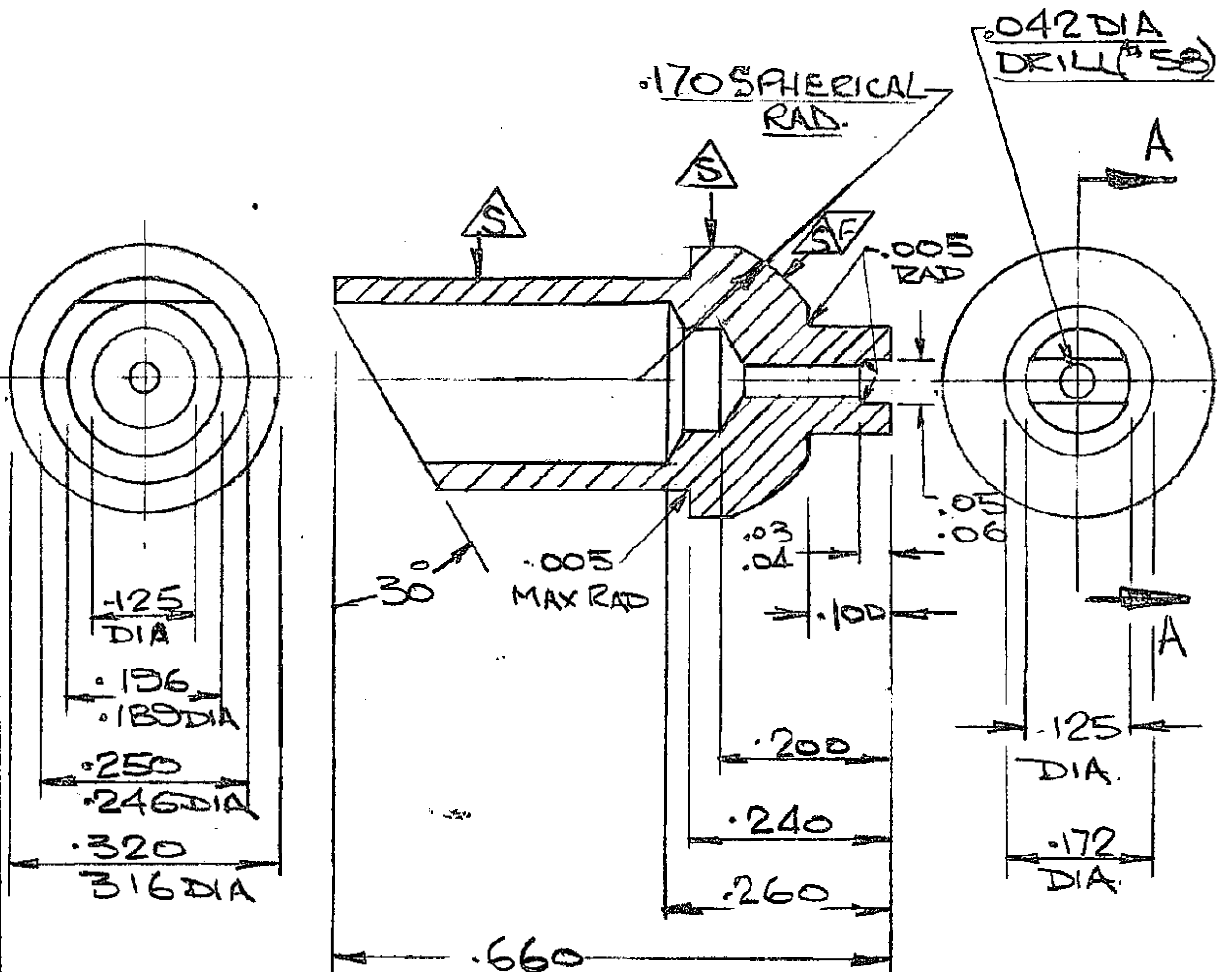

SECTION A-A

PART NO CSP419-1

S SURFACES MUST BE CONCENTRIC WITHIN .002 TIR
F THIS SURFACE TO BE FREE OF SCRATCHES, 32V MAX
 MATERIAL: BRASS - Q-Q-B-626 COMP II. FINISH NIL.

A OR COPPER ALLOY; C36000, TEMPER H02, ASTM-B16

NOTE: EACH FITTING TO BE PACKAGED INDIVIDUALLY.

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE TO BE WITHIN $\pm .010$, ANGLES $\pm 1/2^\circ$

DRAWN	EDSMITH/LUC	CLASSIFICATION	STANDARD
CHECKED	KROMKAMP	FITTING	
STRESSED	M. M. M.		
APPROVED	SCHEIDT/LUC	OXYGEN GAUGE CONNECTOR	CSP 419

8 MAY 86

ALTERNATE MATERIAL ADDED

20 FEB 96

A