


DE HAVILLAND AIRCRAFT of CANADA

PAGE 1

STANDARDS SHEET

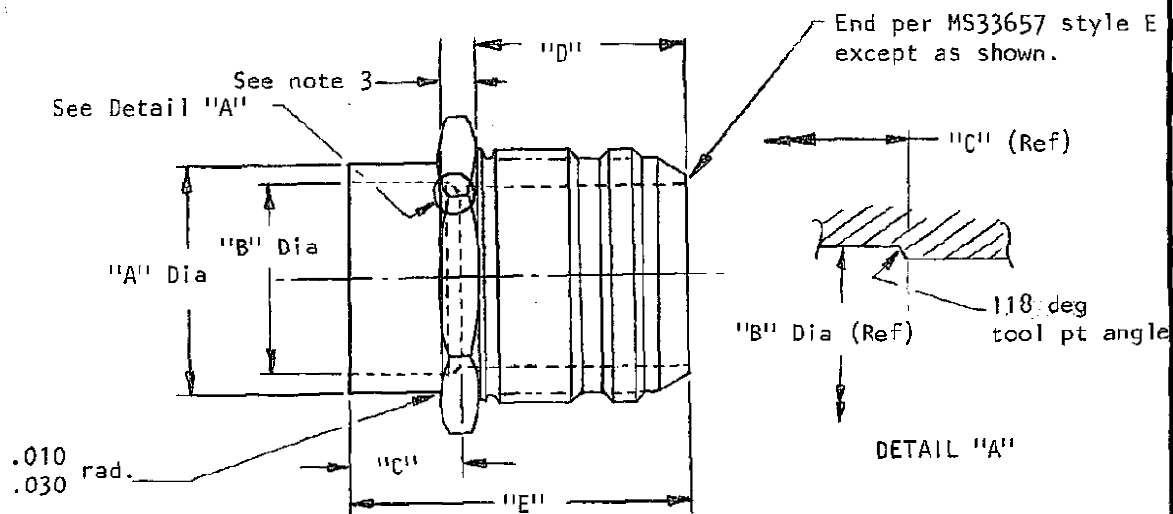

Dash No.	"A" Dia	"B" Dia	"C"	"D"	"E"	Make From
-1	.470	.380-.385	.45	1.312	1.96	AN832-6J

Notes:

- 1) Break all sharp edges and remove all hanging burrs and slivers that might become dislodged under usage.
- 2) Tolerances (unless otherwise specified):
 .xx = $\pm .030$
 .xxx = $\pm .010$
- 3) For tubes $> 3/4$ O.D. dim. = .35
 For tubes $\leq 3/4$ O.D. dim. = .25
- 4) Passivate to PPS 31.05 after machining.

DRAWN	GILCHRIST	CLASSIFICATION	STANDARD
CHECKED	KOHKAM P	UNION, MODIFIED BULKHEAD AND UNIVERSAL	CSP 432
STRESSED	M. J. Smith		
APPROVED	G. J. Smith		

ed 87