


THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

**de HAVILLAND**

**CAGE CODE 71867  
CSP STANDARD**

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

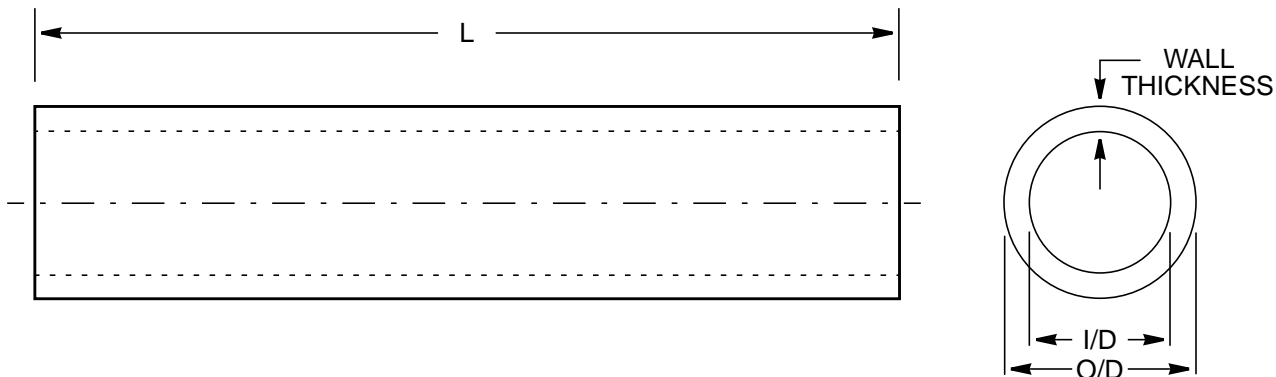

DASH	MATERIAL	O/D	I/D	WALL THICKNESS	'L' DIMENSION	FINISH
-1	WW-T-700/4 5052-0 Aluminum Alloy Tube	.250	-	.020	1.75	NONE
-2	WW-T-700/4 5052-0 Aluminum Alloy Tube	.250	-	.020	3.15	NONE
-3	WW-T-700/4 5052-0 Aluminum Alloy Tube	.375	-	.020	1.25	NONE
-4	C210A TYGOTHANE	-	.250 ± .020	.063 ± .014	2.00 ± .05	NONE
-5	FLUOROSILICONE FVMQ (COMPOUND # APC 1612D)	-	.500 ± .031	.095 ± .014	13.00 ± .13	NONE
-6	FLUOROSILICONE FVMQ (COMPOUND # APC 1612D)	-	.500 ± .031	.095 ± .014	15.00 ± .13	NONE

(E)

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	F. CUZZUPOLI	<b>TUBE, SPECIAL</b>	<b>CSP461</b>
CHECKED	B. McDONALD		
STRESSED	--		SHEET: 1 OF 1
APPROVED	S. HAMID		

(E) CORRECTION MADE TO I/D FOR -6, WAS .250 NOW .500

APPROVED: 24 NOV. 93 REV: A, 14 APR. 94 REV: B, 15 JUNE 94 REV: C, 20 SEPT. 94 REV: D, 25 MAY 98 REV: E 16 DEC 04 REV: