
THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

de HAVILLAND

CAGE CODE 71867
CSP STANDARD

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

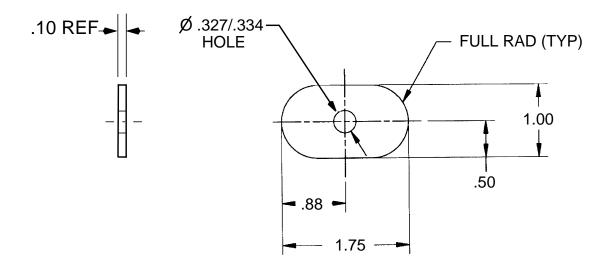

NOTES:

- 1. MATERIAL: .100 THICK CLAD ALUMINUM ALLOY 2024-T3 to QQ-A-250/5
- 2. FINISH: C1 ALODINE plus F19 PRIMER
- 3. PART MARK PER PPS 15.01

EXAMPLE OF PART NUMBER:



SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	J. MacCOLL		
CHECKED	B. EDWARDS	SHIM, SOLID	CSP 514
STRESSED		ALUMINUM	0.1555 4 05 4
APPROVED	B. EDWARDS		SHEET: 1 OF 1

REV:

REV:

REV:

ΕV:

REV:

APPROVED: 20 AUG 2002 | REV: