

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

de HAVILLAND

CAGE CODE 71867
CSP STANDARD

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

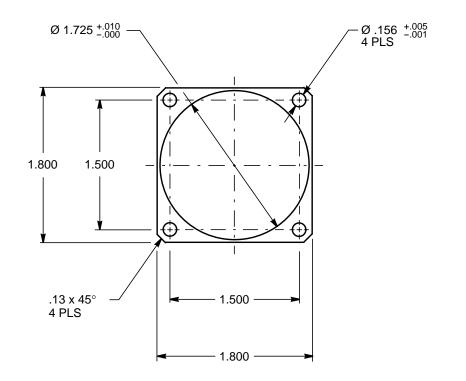

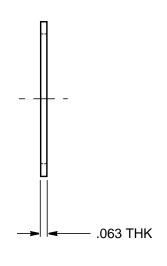

CSP 538-1 SHIM

MATERIAL:

ALUMINIUM ALLOY 2024 T3 PER AMS QQ-A-250/5, .063" THK

FINISH: C1 PER PPS 32.02

NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES
- 2. REMOVE ALL BURRS AND SHARP EDGES
- 3. IDENTIFY FABRICATED SHIM DETAIL PER PPS 15.01

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

SEE ENGINEERING STANDARDS AFFROVAL RECORD FOR ORIGINAL SIGNAL ORES AND CHANGE SUMMARY				
DRAWN	E. DANESH		~~~	
CHECKED	B. EDWARDS	SHIM	CSP	538
STRESSED	E. GIOVANNETTI			
APPROVED	B. EDWARDS		SHEET:	1 of 1

REV:

REV:

REV:

REV:

REV:

APPROVED: 28 MAR 2011 | REV: