THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

# de HAVILLAND


CAGE CODE 71867
CSP STANDARD

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

RE

REV

**APPROVED: 19 DEC 2014** 

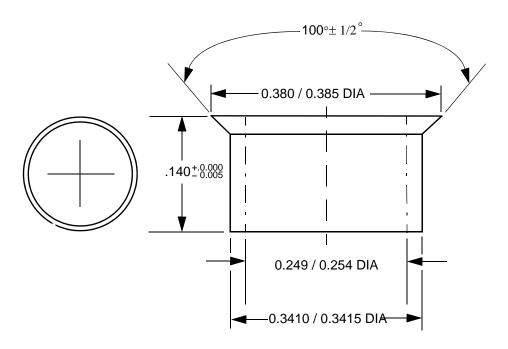

CSP 543-1 SLEEVE BUSHING

## **MATERIAL:**

ALUMINUM ALLOY 7075-T7351 BAR PER AMS225/9

PROT FINISH: ANODIZE IN ACCORDANCE WITH MIL-A-8625 TYPE 1

#### NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
- 2. ALL DIMENSIONS TO BE MET AFTER PLATING / COATING.
- 3. SURFACE TEXTURE 63 MICRO INCHES RHR AS PER ASME B46.1
- 4. REMOVE ALL BURRS AND SHARP EDGES .005 MAX:

## **USAGE INFORMATION:**

THIS BUSHING IS TO REPAIR OVERSIZED HOLES.

IT IS A MANUFACTURED PART SHALL BE USED FOR NCR REPAIR WITH LIAISON APPROVAL ONLY.

## SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	B. EDWARDS			- 40
CHECKED	M. RODRIGUES	SLEEVE BUSHING	<b>CSP 543</b>	
STRESSED	N/A	SLEEVE DOSITING	677777	
APPROVED	B. EDWARDS		SHEET:	1 of 1