
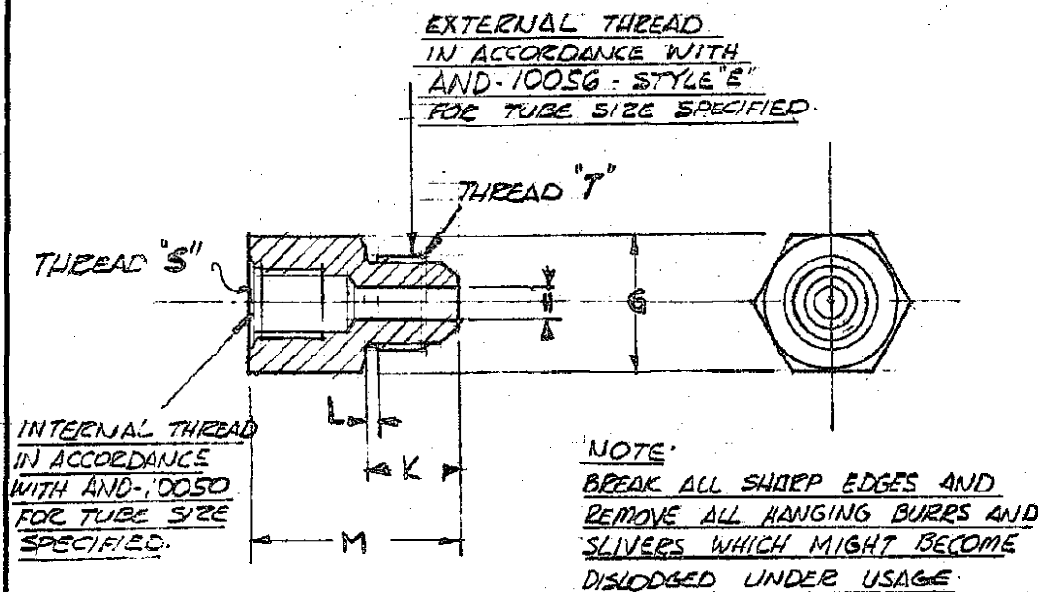


STANDARDS SHEET



DASH NO.	INTERNALLY THREADED END			EXTERNALLY THREADED END				OVERALL	
	(ALUM. ALLOY) TUBING O/D	THREAD "S" REF	H +0.010 -0.000	TUBING O/D	THREAD "T" REF	K	L	M	G 3.004
-2D	1/2	7/16-20 NF3	.206	3/8	9/16-18 NF3	.556	.083	1.25	.813

MATERIAL: ALUM. ALLOY BAR
SPEC. - COMM'L - 2024 T4
GOVT. - QQ-A-268
TEMPER T4.
FINISH: ANODIZE

DRAWN	LUESBY	CLASSIFICATION	STANDARD
CHECKED	NOV. 2/56	REDUCER SCREW THREAD	CSP-76
STRESSED			
APPROVED			

FMC 71867