
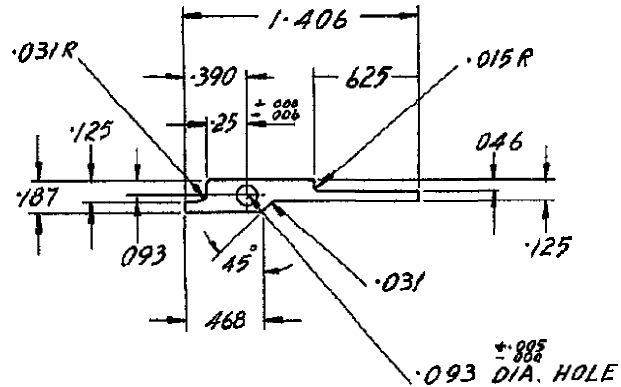


STANDARDS SHEET

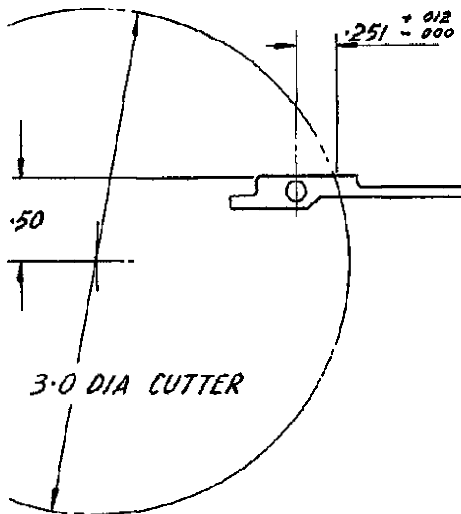

NOTES:-

ECCENTRICITY OF PIN HOLES $\pm .005$
COMM. TOLERANCES UNLESS
OTHERWISE SPECIFIED.

ALL SECTIONS SHALL BE
INTERCHANGEABLE.
TOLERANCES SHALL NOT ACCUMULATE.


MAY BE PURCHASED FROM MOYNAHAN
BRONZE Co, DETROIT, MICHIGAN

FULL SCALE

MATERIAL - ALUM ALLOY - 6061 - T6

SPECIFICATION - QQ-A-270 - TEMPER - T6

NO DIE

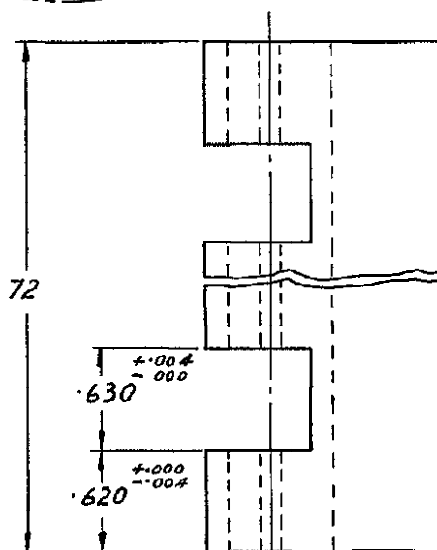

IDENTICAL TO - G 341 (GRUMMAN)
DIE

SECTION ELEMENTS	X	Y	I _{xx}	I _{yy}	P _{xx}	P _{yy}
	INCH		INCHES ⁴		INCH	
SECTION AREA		SQ INCH		LB PER FOOT		
DRAWN	PEMERY, NOV 56	CLASSIFICATION			STANDARD	
CHECKED		EXTRUDED HINGE			CV-185	
STRESSED						
APPROVED						

FMC 71867