


STANDARDS SHEET

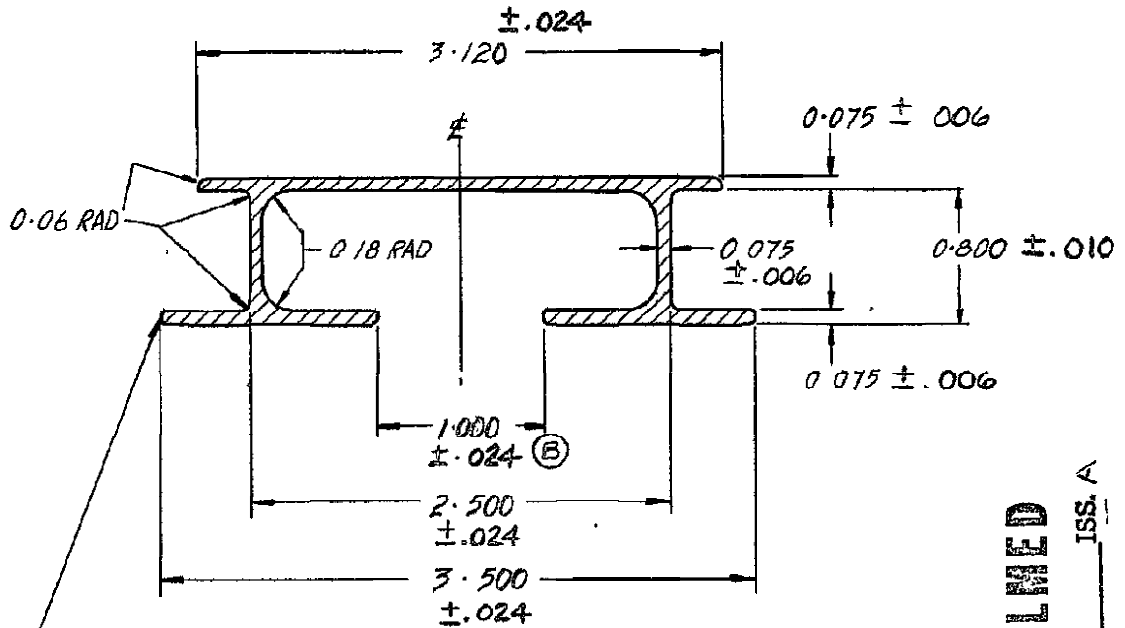

ALL OUTSIDE CORNERS
MAY HAVE 0.03 RAD

FULL SCALE

MATERIAL - ALUM ALLOY - 7075-T-6
OR 7075 T6511 (C)
SPECIFICATION - QQ-A-200/11 TEMPER T-6 (B)
OR T6511 (C)

IDENTICAL TO - CS 65

MICROFILMED

DATE 30/6/61 ISS. A

SECTION ELEMENTS	$\bar{X}$	$\bar{Y}$	I_{XX}	I_{YY}	P_{XX}	P_{YY}
	INCH		INCHES ⁴		INCH	
SECTION AREA	.560 SQ. INCH				.685 LB PER FOOT	
DRAWN	PEMERY, OCT. 56	CLASSIFICATION			STANDARD	
CHECKED		EXTRUDED SHAPE			CV-217	
STRESSED						
APPROVED						

FMC 71867

T6511 OPTION ADDED
SPEL. CHANGED
14/08/94 M. J.

TOLERANCE WAS ±.012
SPEC WAS QQ-A-277
SIGNATURE 24 4.78

JAN 1960

345