


STANDARDS SHEET

EXTERNAL CORNERS .015 RAD.

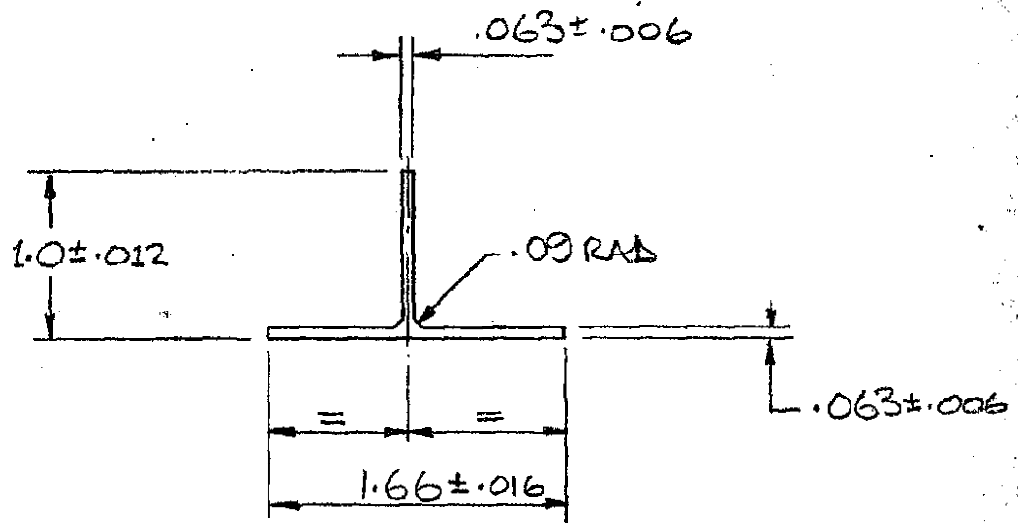

FED. STD. 245 TOLERANCES APPLY UNLESS OTHERWISE SPECIFIED

MATERIAL:- AL ALLOY 2024

SPEC:- QQ-A-200/3 TEMPER T4

INACTIVE — FOR NEW DESIGN
USE CV-605

NOTE ADDED
20.12.78 RUMBLE
11 NOV 72

DRAWN	PREPARED	CLASSIFICATION	STANDARD
CHECKED	RUMBLE	EXTRUDED TEE	CV-498
STRESSED	EJ. MW		
APPROVED	RBL		
STDS. TGP SCHRATTNER			