


## STANDARDS SHEET

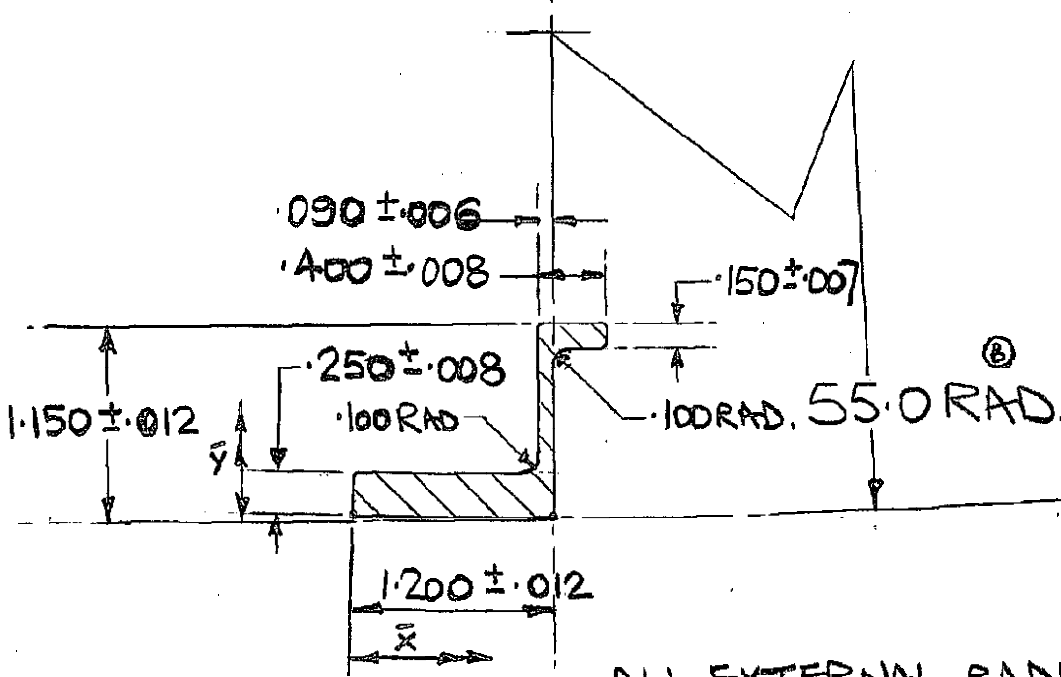

FULL SCALE.

MATL - ALUM. ALLOY 2014-T6.  
SPECIFICATION - QQ-A-200/2 TEMP. T6.  
FED. STD. TOLERANCES \* 245 APPLY.

|                       |                 |       |                 |                 |                 |                 |
|-----------------------|-----------------|-------|-----------------|-----------------|-----------------|-----------------|
| SECTION ELEMENTS      | X               | Y     | I <sub>xx</sub> | I <sub>yy</sub> | P <sub>xx</sub> | P <sub>yy</sub> |
|                       | INCH.           |       | INCH.           |                 | INCH.           |                 |
|                       | 0.787           | 0.337 | 0.057           | 0.073           | 0.364           | 0.413           |
| SECTION AREA          | 0.428 SQ. INCH. |       |                 |                 | 16 PER FT.      |                 |
| DRAWN                 | S. DICK         |       | CLASSIFICATION  |                 | STANDARD        |                 |
| CHECKED               | EHS             |       | EXTRUDED ZED.   |                 | CV 504.         |                 |
| STRESSED              | T. FIELDING     |       |                 |                 |                 |                 |
| APPROVED              | [Signature]     |       |                 |                 |                 |                 |
| SDS. M. P. SCHRAUTNER |                 |       |                 |                 |                 |                 |

1 AUG 73  
© SEC. PROPERTIES ADDED DIMS.

NOV 72  
© JAN 73 ±.50 ON 55.0 RAD DIM. DELETED. R.K.

A