


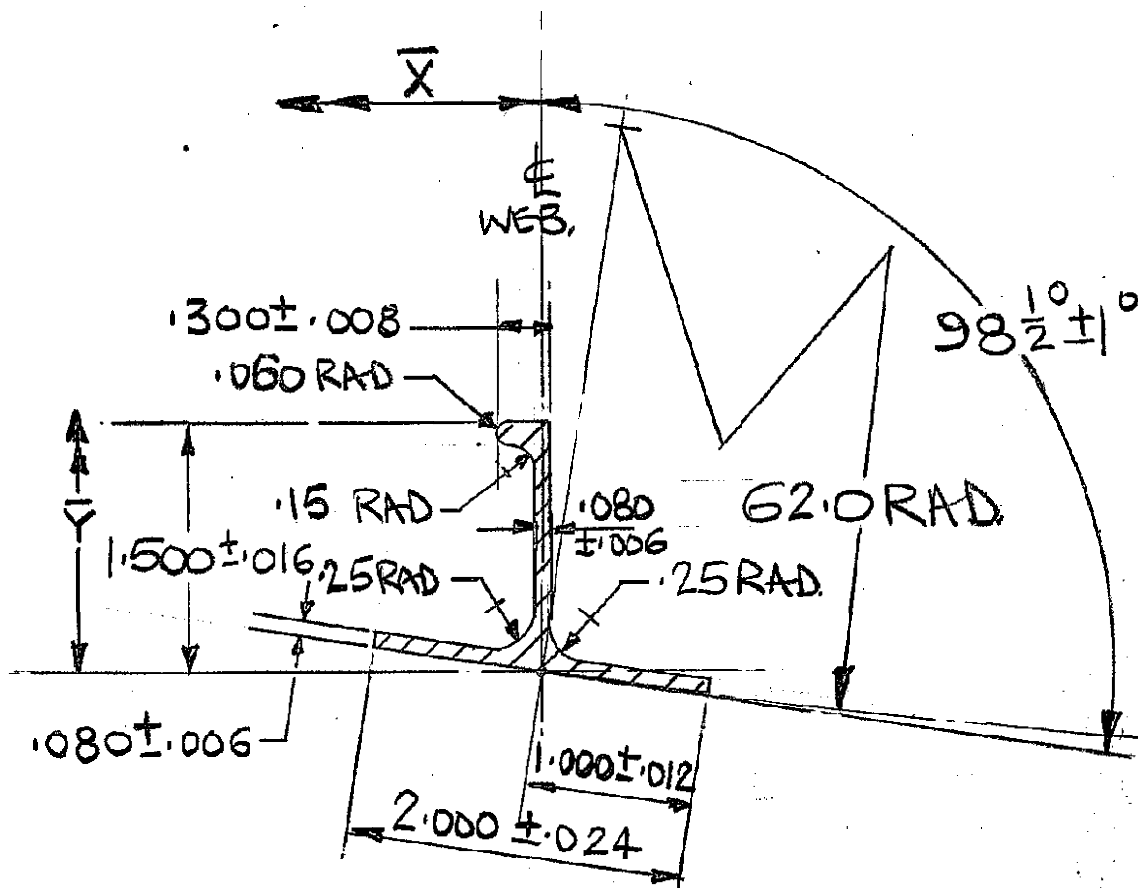

EXTERNAL RAD II .016.

FULL SCALE.

① MIN LENGTH 24 FT ②

MAT^L - ALUM. ALLOY 7075-T6511
SPECIFICATION - QQ-A-200/11 TEMP. T6511
FED. STD. TOLERANCES # 245 APPLY.

SECTION ELEMENTS		X	Y	I _{xx}	I _{yy}	R _{xx}	R _{yy}
		INCH		INCH ⁴		INCH	
SECTION AREA		0.301				WT = .394 lb per ft	
DRAWN	G. J. H.	CLASSIFICATION				STANDARD	
CHECKED	G. J. H.	EXTRUDED TEE				CV 607	
STRESSED	S. L. H.						
APPROVED	J. H. H.						
		STDS D: P SCHWABER 26 JAN 67					

STDS NSP SCHREIBER 26 JUN 67

② MIN LENGTH WAS 20 FT
12/5/86

②

① MIN LENGTH ADDED
PLAN 6-2-81

①