


## STANDARDS SHEET

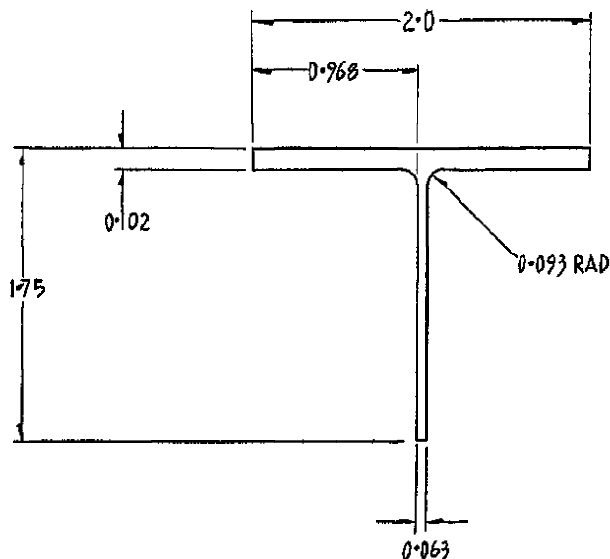

CORNERS 0.031 RAD

FULL SCALE

MATERIAL — ALUM. ALLOY 7075-T6  
OR 7025-T6511<sup>(A)</sup>  
SPECIFICATION — QQ-A-277 TEMPER T-6  
QQ-A-200/111 OR T6511<sup>(A)</sup>

| IDENTICAL TO         |                          |                    |
|----------------------|--------------------------|--------------------|
| GRUMMAN DIE<br>56725 | GRUMMAN DWG<br>89-V-1061 | ALCAN DIE<br>31626 |

| SECTION ELEMENTS           | $\bar{X}$      | $\bar{Y}$ | $I_{xx}$            | $I_{yy}$ | $P_{xx}$  | $P_{yy}$ |
|----------------------------|----------------|-----------|---------------------|----------|-----------|----------|
|                            | INCH           |           | INCHES <sup>4</sup> |          | INCH      |          |
|                            |                |           |                     |          |           |          |
| SECTION AREA 0.309 SQ INCH |                |           | 0.371 LB PER FOOT   |          |           |          |
| DRAWN — SFG APR 1956       | CLASSIFICATION |           |                     |          | STANDARD  |          |
| CHECKED                    | EXTRUDED TEE.  |           |                     |          | CV-61     |          |
| STRESSED                   |                |           |                     |          |           |          |
| APPROVED                   |                |           |                     |          |           |          |
|                            |                |           |                     |          | FMC 71867 |          |

T6511 TEMPER OPTION ADDED  
SPEC. CHANGED  
11/08/1-6

*JP*