


STANDARDS SHEET

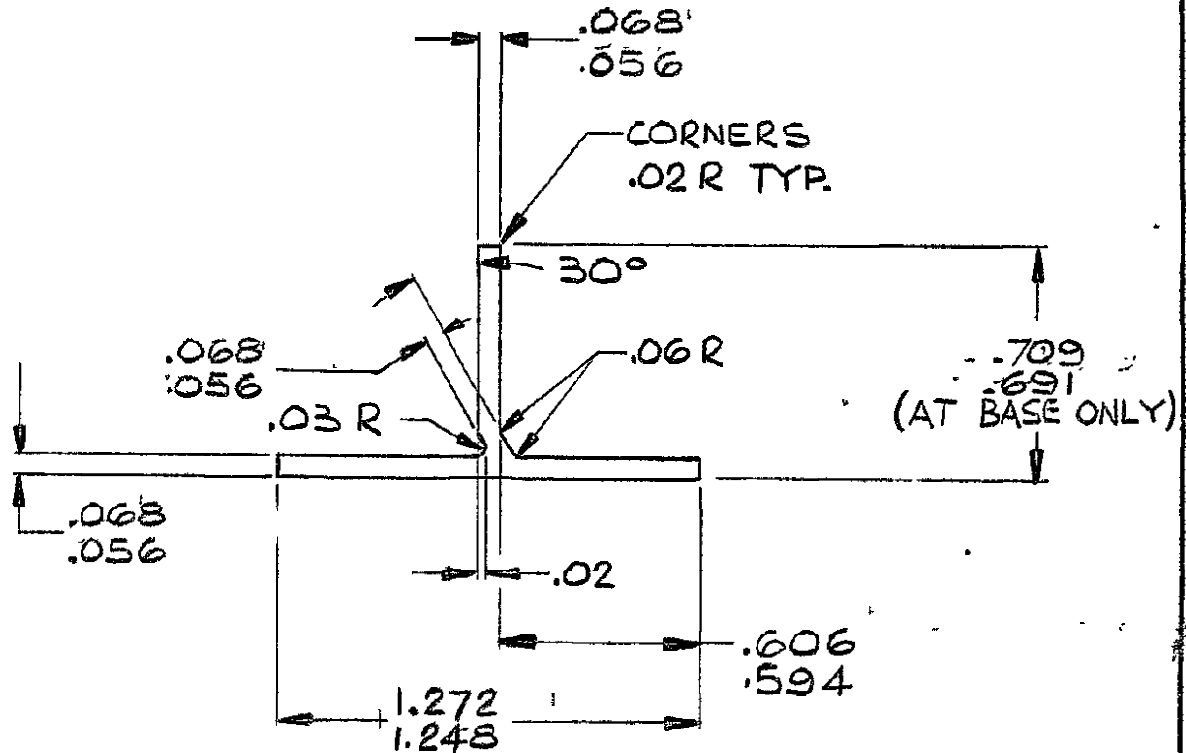

SCALE 2 TO 1

MATERIAL:-ALUM. ALLOY 7075-T6. OR 7075-T6511 (A)
 SPECIFICATION:- QQ-A-200/11 TEMP. T6.
 FED. STD. TOLERANCES #245 APPLY.

NOTES:

- 1) CV 628 DIMENSIONALLY INTERCHANGEABLE WITH CV 526.
- 2) THIS EXTRUSION TO BE INK STAMPED "CV 628 7075-T6" CONTINUOUSLY ALONG ENTIRE LENGTH.

SECTION ELEMENTS	$\bar{X}$	$\bar{Y}$	I_{xx}	I_{yy}	P_{xx}	P_{yy}
	INCH		INCH ⁴		INCH	
SECTION AREA			LB PER FT			
DRAWN	CLEMENT.	CLASSIFICATION			STANDARD	
CHECKED	Quarick	EXTRUDED TEE			CV 628	
STRESSED	Medford					
APPROVED	GDW					

(A) T6511 OPTION ADDED
 14/08/96 m.j.f.