


STANDARDS SHEET

EXTERNAL CORNERS
.016 RAD UNLESS SPECIFIED

SCALE 2:1

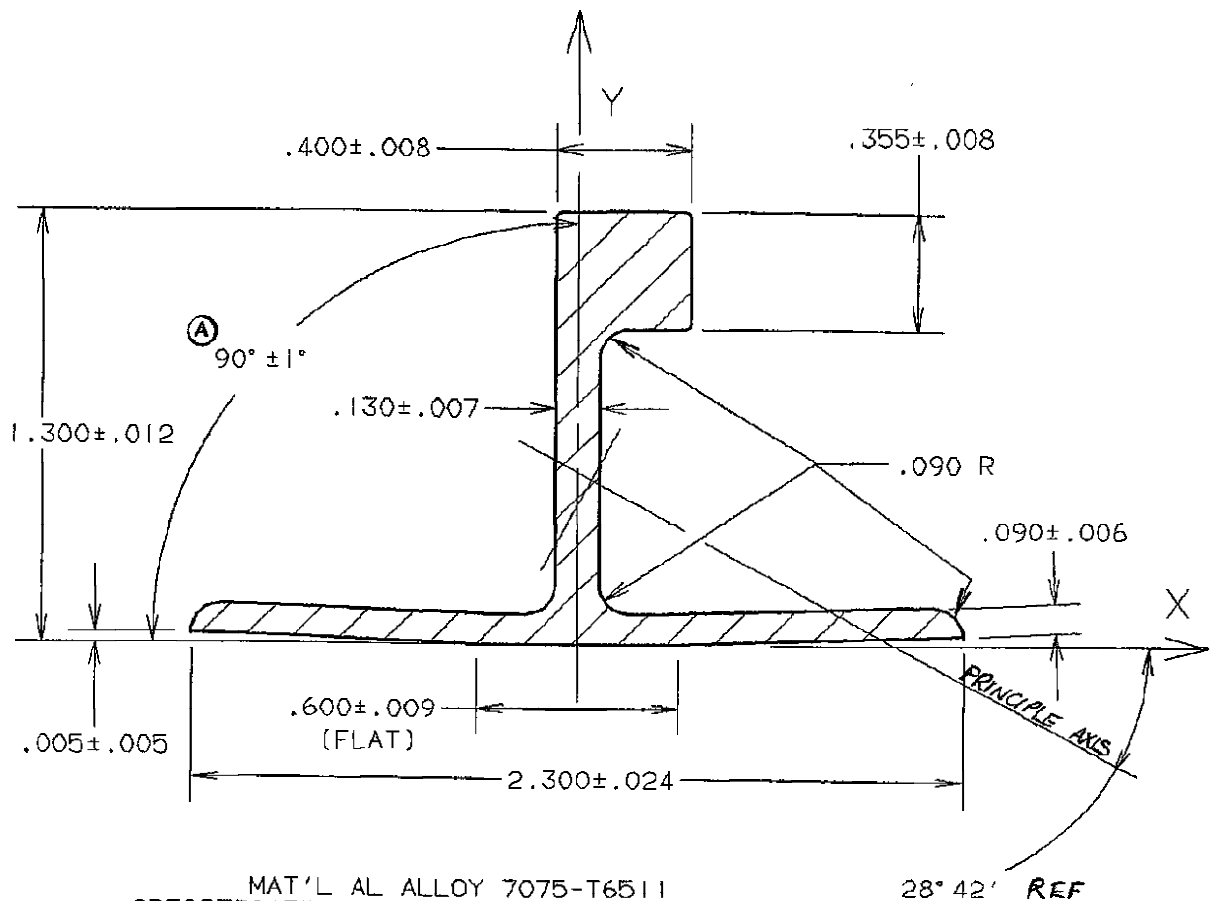

MAT'L AL ALLOY 7075-T6511
SPECIFICATION - QQ-A-200/11 TEMP. T6511
FED. STD. TOLERANCES #245 APPLY.

MIN. LENGTH 28 FT.

SECTION PROPERTIES

0.0418	XBAR	0.1061	I X-X	0.0840	IP Y-Y
0.4942	YBAR	0.4430	R Y-Y	0.1127	IP X-X
0.0906	I Y-Y	0.4793	R X-X	0.4265	RP Y-Y
0.0121	I X-Y	-28.698	ZETA	0.4941	RP X-X
0.4617	AREA	(SQ. IN" S)	.5540	LBS/FT.	

DRAWN	H. HUI	CLASSIFICATION	STANDARD
CHECKED	P. BARNES	EXTRUDED TEE	CV693
STRESSED	HORNSTEIN		
APPROVED	G. DICK		

(A) 90° ± 1° ADDED H. HUI 1-6-88