


## STANDARDS SHEET

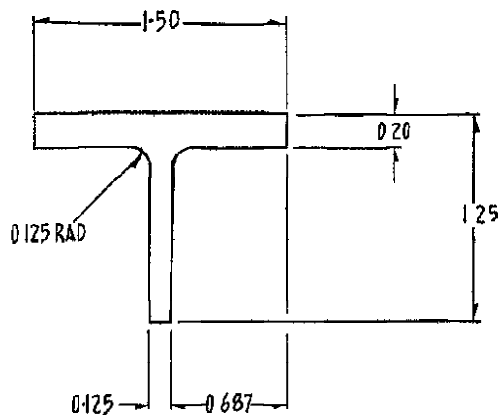

CORNERS 0.031 RAD

FULL SCALE.

MATERIAL — ALUM ALLOY 7075-T6

SPECIFICATION — QQ-A-277 TEMPER T6

NO DIE

| IDENTICAL TO        |                          |                      |
|---------------------|--------------------------|----------------------|
| GRUMMAN DIE<br>7050 | GRUMMAN DWG<br>89-V-1025 | REYNOLDS DIE<br>7050 |

| SECTION ELEMENTS              | $\bar{X}$      | $\bar{Y}$ | $I_{XX}$            | $I_{YY}$ | $P_{XX}$ | $P_{YY}$ |
|-------------------------------|----------------|-----------|---------------------|----------|----------|----------|
|                               | INCH           |           | INCHES <sup>4</sup> |          | INCH     |          |
|                               |                |           |                     |          |          |          |
| SECTION AREA 0.437 SQ INCH    |                |           | 0.524 LB PER FOOT   |          |          |          |
| DRAWN — <i>SFG</i> — APR 1956 | CLASSIFICATION |           |                     |          | STANDARD |          |
| CHECKED                       | EXTRUDED TEE.  |           |                     |          | CV-70.   |          |
| STRESSED                      |                |           |                     |          |          |          |
| APPROVED                      |                |           |                     |          |          |          |

FMC 71867