


# de HAVILLAND

CAGE CODE 71867  
CV STANDARD

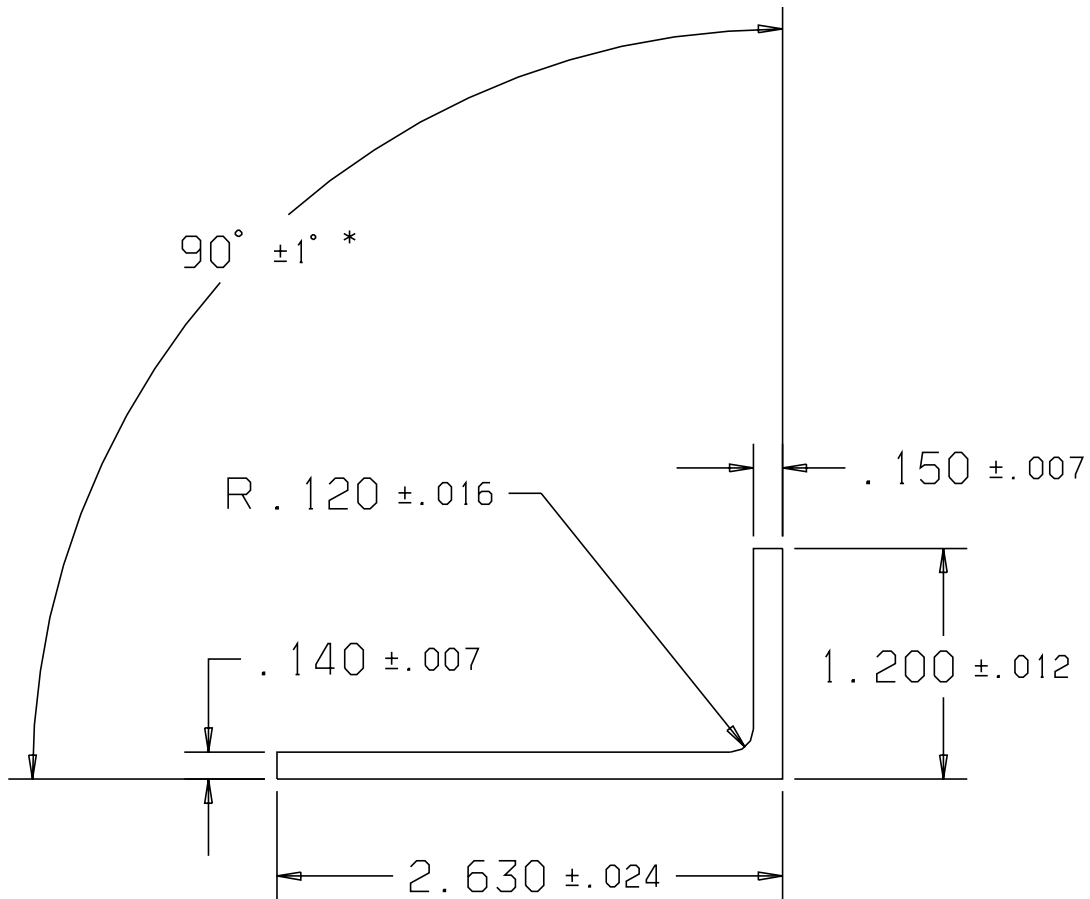

EXTERNAL RAD = .016

SCALE = 1:1

MATERIAL: ALUMINUM ALLOY 7075-T7311  
SPECIFICATION: QQ-A-200/11  
UNLESS OTHERWISE STATED FED. STD #245 TOLERANCES APPLY

## NOTES:

- 1) SPECIAL TOLERANCES ARE MARKED WITH AN ASTERISK ( \* )
- 2) THE EXTRUSION SHALL BE MARKED WITH THE CV # EVERY 3 FEET. **THE MARKING METHOD SHALL NOT HAVE A DETRIMENTAL EFFECT ON THE MATERIAL.**
- 3) Ra 125 MAX. FOR CHEM-MILLED SURFACES.

| deHAVILLAND INC                                                                     |                      |
|-------------------------------------------------------------------------------------|----------------------|
| All changes to this standard must be made through deHavilland Standards Engineering |                      |
| ENGINEERING STANDARDS / RELEASE                                                     | J. ROTSCH / S. HAMID |

FOR ORIGINAL SIGNATURES, SEE THE ENGINEERING STANDARDS APPROVAL RECORD

| MITSUBISHI HEAVY INDUSTRIES |             | EXTRUDED ANGLE  | CV 744      |
|-----------------------------|-------------|-----------------|-------------|
| DESIGNED                    | C. IWASAKI  |                 |             |
| STRESS                      | M. YANAGIYA |                 |             |
| PROG. MGMT.                 | N. HATEMATA |                 |             |
|                             |             | DATE: 12 DEC 97 | REVISION: - |

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC. THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AND USE, AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS.