



de HAVILLAND

CAGE CODE 71867
CV STANDARD



SCALE: 1 / 1

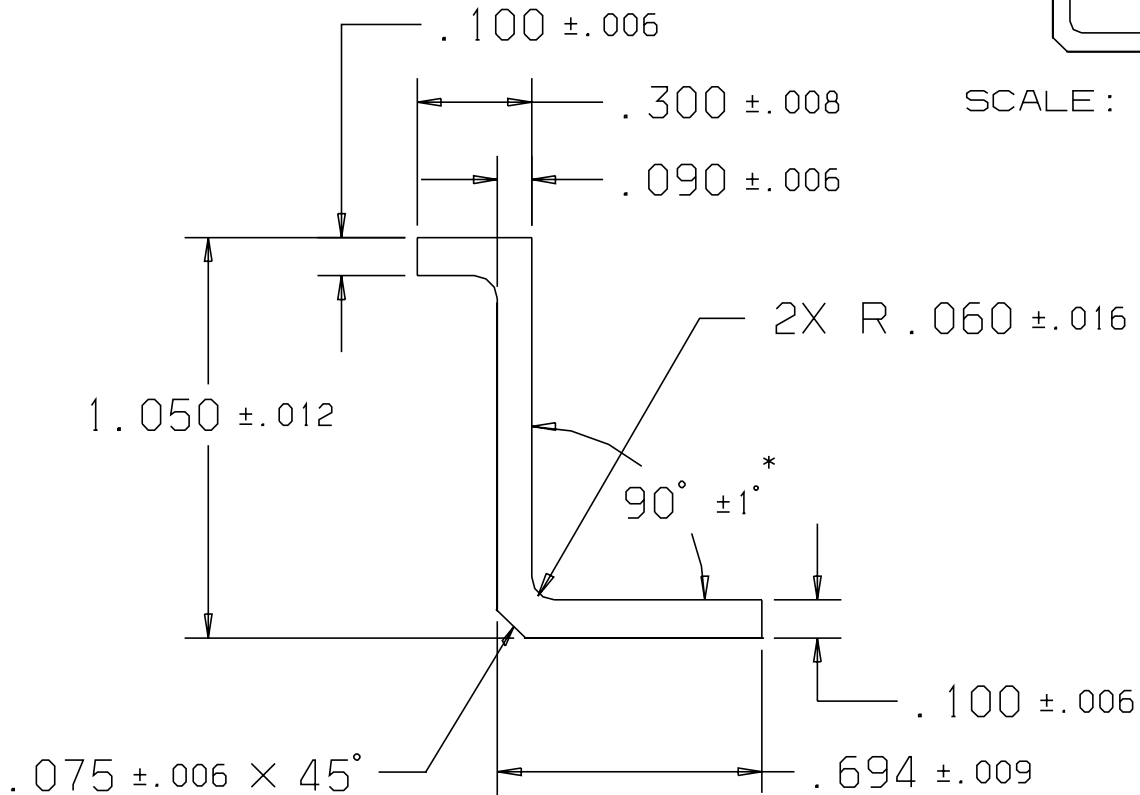

EXTERNAL RAD = .016

SCALE = 2:1

MATERIAL: ALUMINUM ALLOY 7075-T73511

SPECIFICATION: QQ-A-200/11

UNLESS OTHERWISE STATED FED. STD #245 TOLERANCES APPLY

NOTES:

- 1) SPECIAL TOLERANCES ARE MARKED WITH AN ASTERISK (*)
- 2) THE EXTRUSION SHALL BE MARKED WITH THE CV # EVERY 3 FEET. **THE MARKING METHOD SHALL NOT HAVE A DETRIMENTAL EFFECT ON THE MATERIAL.**
- 3) Ra 125 MAX. FOR CHEM-MILLED SURFACES.

deHAVILLAND INC

All changes to this standard must be made through deHavilland Standards Engineering

ENGINEERING STANDARDS / RELEASE

J. ROTSCH / S. HAMID

FOR ORIGINAL SIGNATURES, SEE THE ENGINEERING STANDARDS APPROVAL RECORD

MITSUBISHI HEAVY INDUSTRIES

DESIGNED	C. IWASAKI
STRESS	M. YANAGIYA
PROG. MGMT.	N. HATEMATA

EXTRUDED ZED

DATE: 7 JAN 98

CV 789

REVISION: -