


de HAVILLAND

CAGE CODE 71867

CV STANDARD

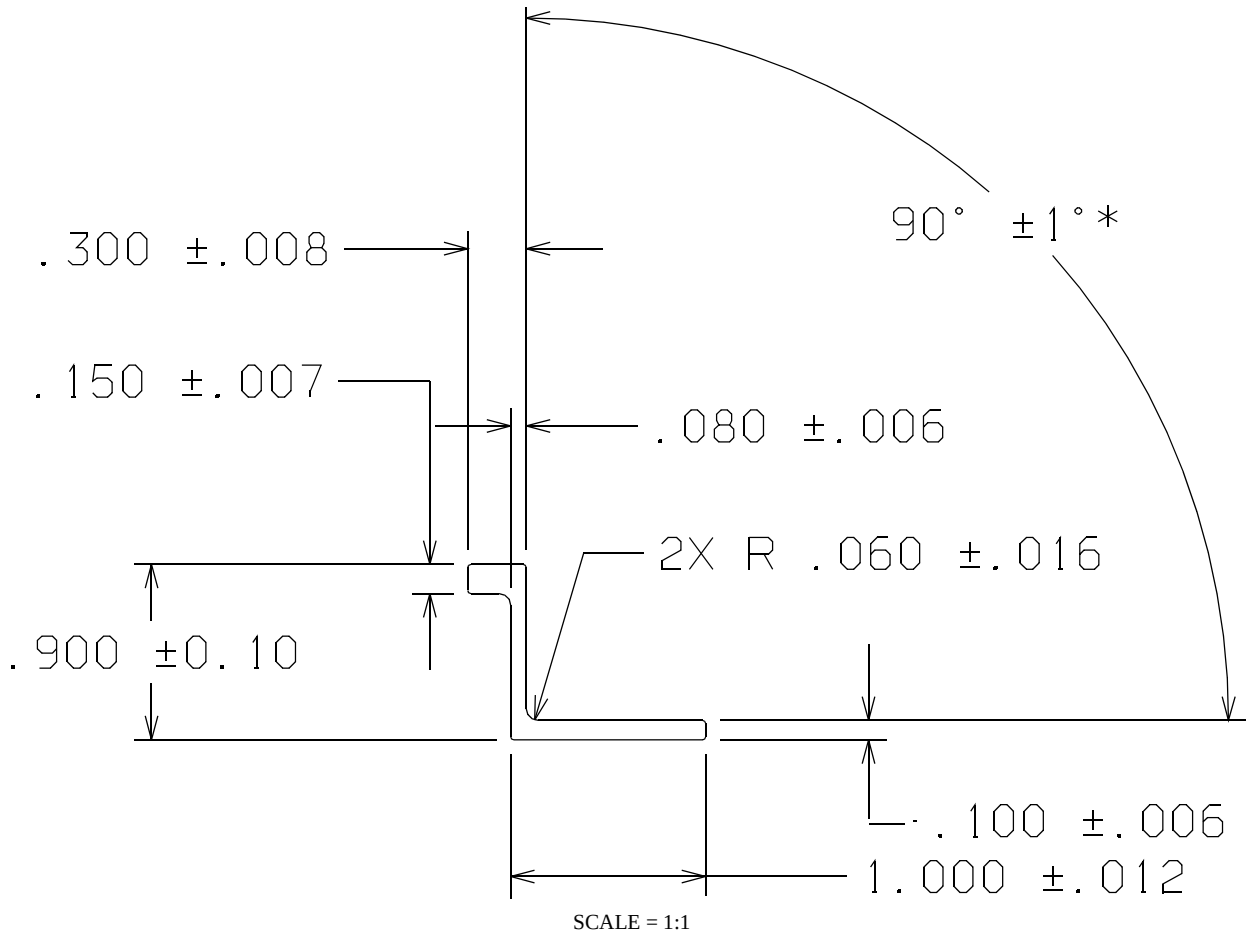

EXTERNAL RAD = .016

MATERIAL: ALUMINUM ALLOY 7075-T73511

SPECIFICATION: QQ-A-200/11

UNLESS OTHERWISE STATED FED. STD #245 TOLERANCES APPLY

MINIMUM LENGTH - 14 FEET

NOTES:

- 1) SPECIAL TOLERANCES ARE MARKED WITH AN ASTERISK (*)
- 2) THE EXTRUSION SHALL BE MARKED WITH THE CV # EVERY 3 FEET. **THE MARKING METHOD SHALL NOT HAVE A DETRIMENTAL EFFECT ON THE MATERIAL.**
- 3) Ra 125 MAX. FOR CHEM-MILLED SURFACES.

deHAVILLAND INC

All changes to this standard must be made through deHavilland Standards Engineering

ENGINEERING STANDARDS / RELEASE

F. CUZZUPOLI / S. HAMID

FOR ORIGINAL SIGNATURES, SEE THE ENGINEERING STANDARDS APPROVAL RECORD

mitsubishi heavy industries

DESIGNED

STRESS

PROG. MGMT.

EXTRUDED ZED

DATE: 19 JUN 98

CV842


REVISION: -

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC. THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AND USE, AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION TO THE EXTENT OF THOSE RIGHTS.

de HAVILLAND

CAGE CODE 71867

CV STANDARD

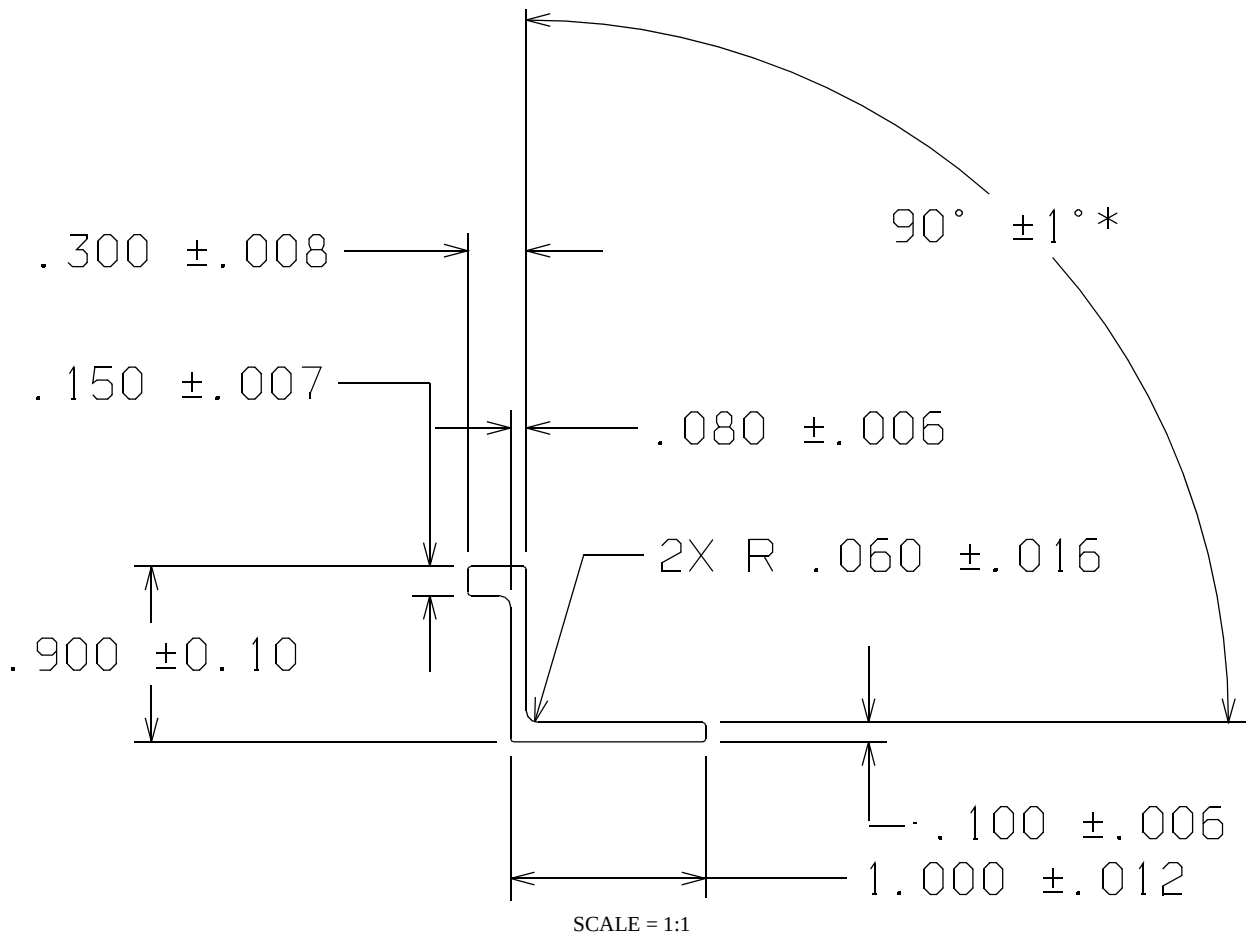

EXTERNAL RAD = .016

MATERIAL: ALUMINUM ALLOY 7075-T73511

SPECIFICATION: QQ-A-200/11

UNLESS OTHERWISE STATED FED. STD #245 TOLERANCES APPLY

MINIMUM LENGTH - 14 FEET

NOTES:

- 1) SPECIAL TOLERANCES ARE MARKED WITH AN ASTERISK (*)
- 2) THE EXTRUSION SHALL BE MARKED WITH THE CV # EVERY 3 FEET. **THE MARKING METHOD SHALL NOT HAVE A DETRIMENTAL EFFECT ON THE MATERIAL.**
- 3) Ra 125 MAX. FOR CHEM-MILLED SURFACES.

deHAVILLAND INC

All changes to this standard must be made through deHavilland Standards Engineering

ENGINEERING STANDARDS / RELEASE

F. CUZZUPOLI / S. HAMID

FOR ORIGINAL SIGNATURES, SEE THE ENGINEERING STANDARDS APPROVAL RECORD

MITSUBISHI HEAVY INDUSTRIES	
DESIGNED	
STRESS	
PROG. MGMT.	

EXTRUDED ZED

DATE: 19 JUN 98

CV842


REVISION: -

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC. THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AND USE, AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION TO THE EXTENT OF THOSE RIGHTS.

de HAVILLAND

CAGE CODE 71867

CV STANDARD

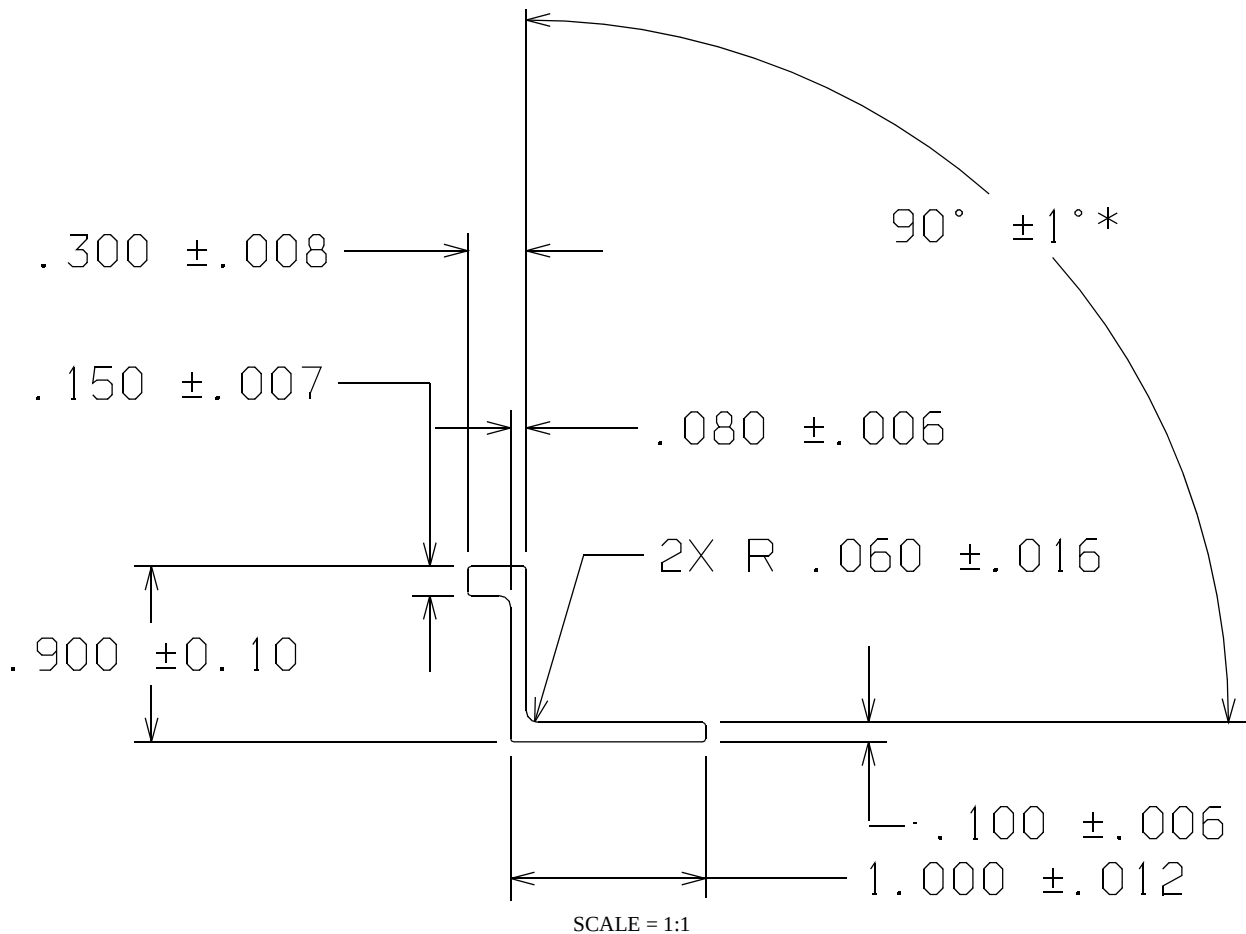

EXTERNAL RAD = .016

MATERIAL: ALUMINUM ALLOY 7075-T73511

SPECIFICATION: QQ-A-200/11

UNLESS OTHERWISE STATED FED. STD #245 TOLERANCES APPLY

MINIMUM LENGTH - 14 FEET

NOTES:

- 1) SPECIAL TOLERANCES ARE MARKED WITH AN ASTERISK (*)
- 2) THE EXTRUSION SHALL BE MARKED WITH THE CV # EVERY 3 FEET. **THE MARKING METHOD SHALL NOT HAVE A DETRIMENTAL EFFECT ON THE MATERIAL.**
- 3) Ra 125 MAX. FOR CHEM-MILLED SURFACES.

deHAVILLAND INC

All changes to this standard must be made through deHavilland Standards Engineering

ENGINEERING STANDARDS / RELEASE

F. CUZZUPOLI / S. HAMID

FOR ORIGINAL SIGNATURES, SEE THE ENGINEERING STANDARDS APPROVAL RECORD

mitsubishi heavy industries

DESIGNED

STRESS

PROG. MGMT.

EXTRUDED ZED

DATE: 19 JUN 98

CV842


REVISION: -

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC. THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AND USE, AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION TO THE EXTENT OF THOSE RIGHTS.

de HAVILLAND

CAGE CODE 71867

CV STANDARD

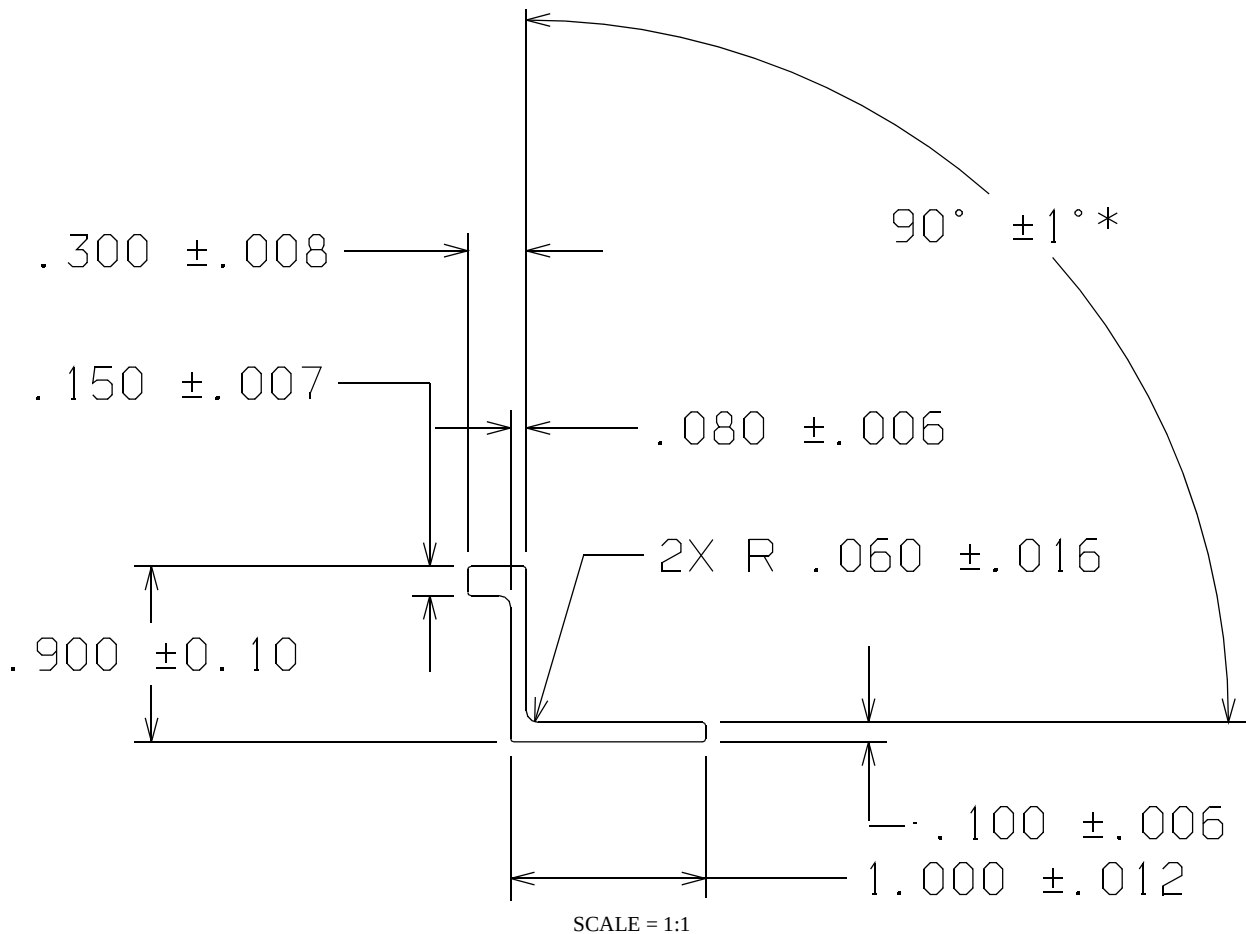

EXTERNAL RAD = .016

MATERIAL: ALUMINUM ALLOY 7075-T73511

SPECIFICATION: QQ-A-200/11

UNLESS OTHERWISE STATED FED. STD #245 TOLERANCES APPLY

MINIMUM LENGTH - 14 FEET

NOTES:

- 1) SPECIAL TOLERANCES ARE MARKED WITH AN ASTERISK (*)
- 2) THE EXTRUSION SHALL BE MARKED WITH THE CV # EVERY 3 FEET. **THE MARKING METHOD SHALL NOT HAVE A DETRIMENTAL EFFECT ON THE MATERIAL.**
- 3) Ra 125 MAX. FOR CHEM-MILLED SURFACES.

deHAVILLAND INC

All changes to this standard must be made through deHavilland Standards Engineering

ENGINEERING STANDARDS / RELEASE

F. CUZZUPOLI / S. HAMID

FOR ORIGINAL SIGNATURES, SEE THE ENGINEERING STANDARDS APPROVAL RECORD

MITSUBISHI HEAVY INDUSTRIES	
DESIGNED	
STRESS	
PROG. MGMT.	

EXTRUDED ZED

DATE: 19 JUN 98

CV842

REVISION: -

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC. THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AND USE, AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION TO THE EXTENT OF THOSE RIGHTS.