


de HAVILLAND

CAGE CODE 71867

CV STANDARD

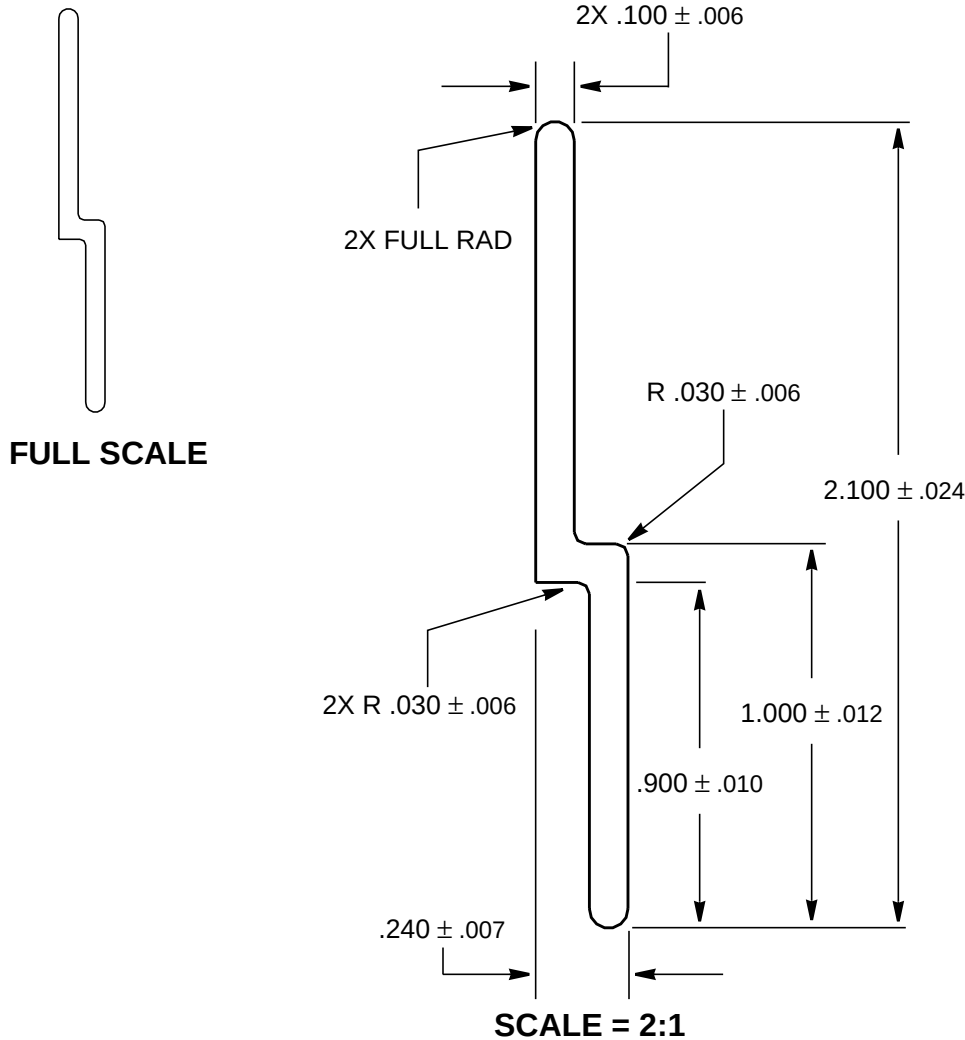

EXTERNAL RAD = .016

MATERIAL: ALUMINUM ALLOY 2024-T3511

SPECIFICATION: QQ-A-200/3

FED. STD #245 TOLERANCES APPLY

MINIMUM LENGTH - 8 FEET

NOTES:

- 1) THE EXTRUSION SHALL BE MARKED WITH THE CV # EVERY 3 FEET. MARKING METHOD SHALL NOT HAVE A DETRIMENTAL EFFECT ON THE MATERIAL

FOR ORIGINAL SIGNATURES, SEE THE ENGINEERING STANDARDS APPROVAL RECORD

DRAWN	F. Cuzzupoli	EXTRUDED SHAPE	CV 855
CHECKED	B. MacDonald		
STRESSED			
APPROVED	S. Hamid		
		DATE: 10 AUG 98	REVISION: --

THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC. THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AND USE, AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS.