


FULL SCALE

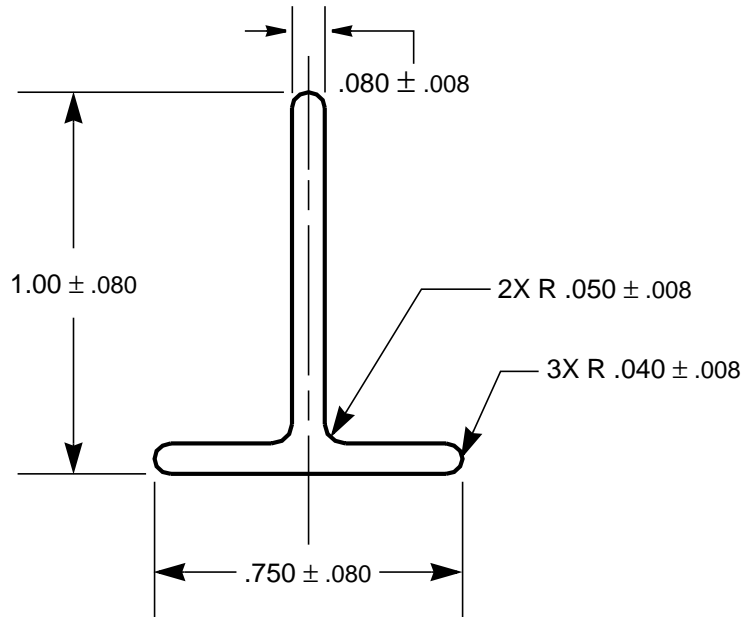

SCALE 2:1

**MATERIAL:** AMS 3303, SILICONE RUBBER

**COLOUR:** BROWN, FED-STD-595 (#20045)

**NOTES:** 1. ENGINEERING APPROVAL REQUIRED BEFORE FIRST PRODUCTION RUN

2. FLAMMABILITY REQUIREMENTS TO MEET:

ⓓ a. ~~CVR102 - F.A.R. 25.853 (b-2) AMEND 25-51~~

b. CVR102-1 - F.A.R. 25.853 (b-2) AMEND 25-51 AND 45° BURN THROUGH TEST ONLY OF F.A.R. 25.855 (a-1) AMEND 25-51

3. MINIMUM LENGTH SHALL BE OF 144"

4. ALL TOLERANCES PER AMS 2279

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN  
CHECKED  
STRESSED  
APPROVED

FOR  
SIGNATURES  
SEE REV.  
DATED:  
08 OCT 86

**SEAL, EXTRUSION,  
T-SECTION**

**CVR 102**

SHEET: 1 of 1

ⓓ NOTE 2 MODIFIED (a DELETED AND b. ADDED)

REV:

REV:

REV: D,2 NOV 98

REV: C,15 MAY 98

REV: B, 8 OCT. 86

REV: A, 3 OCT. 78

APPROVED: 7 JULY 78