


STANDARDS SHEET

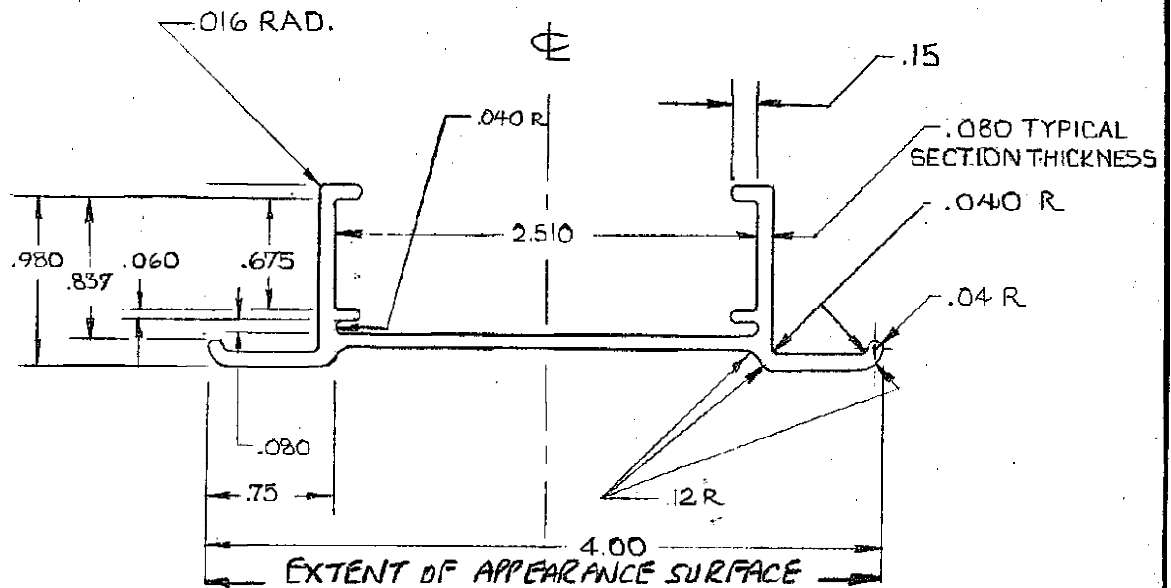

① FAR 25.853(b) And. 25-51

ALL INSIDE RADS. .016
UNLESS SHOWN.


MATERIAL - VALOX COLOR
SPECIFICATIONS-420 SEQ-(5209)

① FLAMMABILITY: DIMS 69.01 METHOD 1A CLASS B

MINIMUM LENGTH - 45"

COLOR - BEIGE

STOCK TO BE PACKED IN SUCH A MANNER AS TO PROTECT EXTRUSION FROM DISTORTION AND SURFACE DAMAGE.

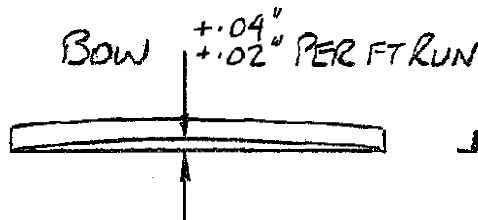

PRIOR TO EACH SHIPMENT A SERIALIZED SAMPLE MUST BE SUBMITTED TO DH. ENGINEERING FOR COLOUR APPROVAL.

DRAWN	G. BALL	CLASSIFICATION	STANDARD
CHECKED	LAWSON	LENS EXTRUSION	CVR 103
STRESSED	<i>[Signature]</i>		
APPROVED	<i>[Signature]</i>		

SCHRAITNER 11 DEC 79

① FLAMMABILITY RECD CHANGED TO FAR RULE
29-9-86 up 882
DC