
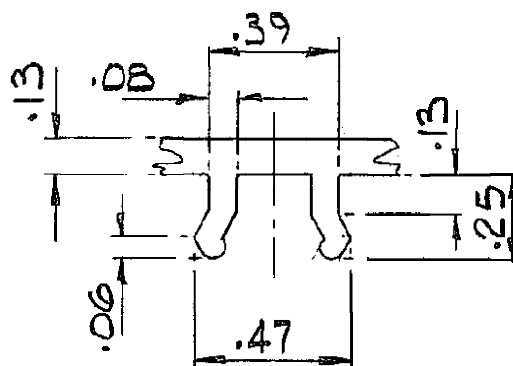


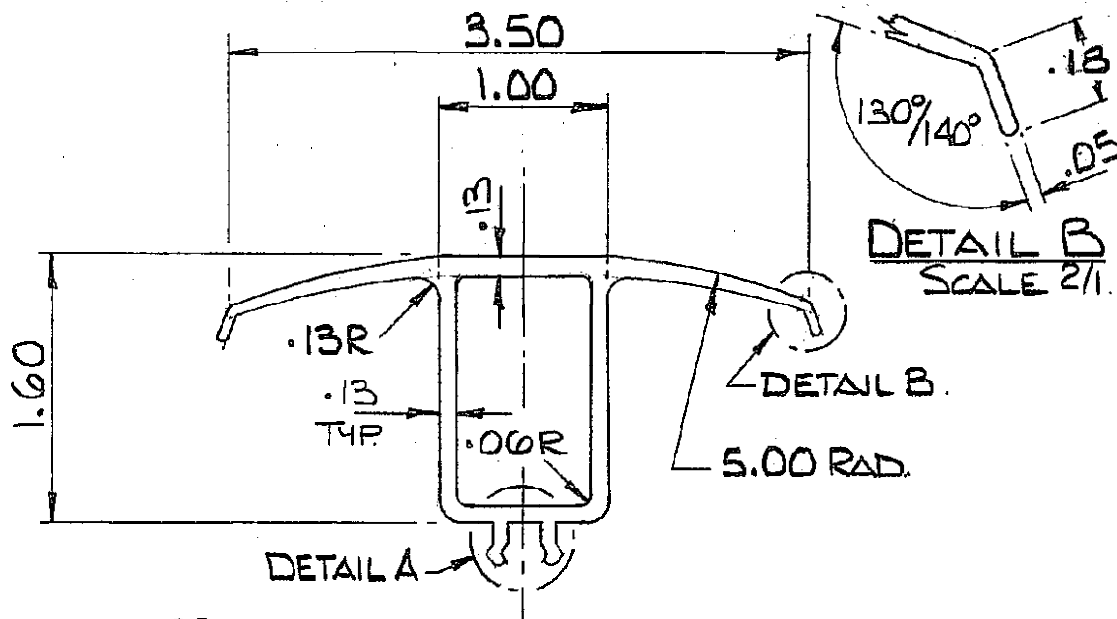

DETAIL A.
SCALE 2/1

NOTES:

1. DETAIL IS SYMMETRICAL ABOUT ϕ
2. SCALE: 1/1 & 2/1
3. MATL - POLYURETHANE (POLYETHER)
DUROMETER - SHORE A80
COLOR - MATTE BLACK TO
FED. STD. 595 #3703B.
4. FLAMMABILITY: ~~DHMS G9.01,~~
~~CLASS B, METHOD 1A.~~
5. BOTH ARMS TAPER FROM .10
TO .05.
6. MINIMUM LENGTH - 6ft.
7. UNQUOTED RADII TO BE
.03 OR LESS.

① FAR 25.853(b) Amd. 25-51

ENGINEERING APPROVAL REQ'D ON SPECIMIN PRIOR TO PRODUCTION RUN.

DRAWN	G. MOUNSEY	CLASSIFICATION	STANDARD
CHECKED	<i>[Signature]</i>	EXTRUSION - SEAT TRACK COVER.	CVR 108
STRESSED	<i>[Signature]</i>		
APPROVED	<i>[Signature]</i>		

24.9.79

① FLAMMABILITY REBT CHANGED TO FAR 25.853(b) Amd. 25-51