


STANDARDS SHEET

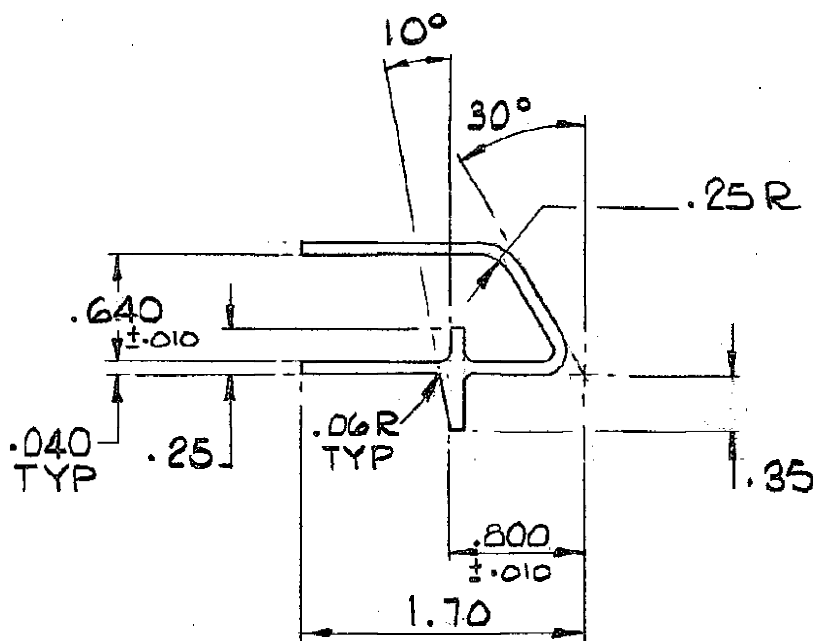

(A) FLAMMABILITY REQ'T CHANGED
TO FAR RULE.
30-9-86 D.C. 48 GRK F

1. MATERIAL - POLYCARBONATE L-P-393. FORM 1
2. COLOUR - NATURAL.
3. FLAM ~~(A) D.H.M.S. - 69.01 CLASS B METHOD 1A.~~ (A) FAR 25.853(b) And. 25-51
4. MINIMUM LENGTH - 6FE
5. SCALE - 1/1
6. ENGINEERING APPROVAL REQ'D ON SPECIMEN PRIOR TO PRODUCTION RUN.
7. TOLERANCES ±.030 UNLESS OTHERWISE STATED.

DRAWN	G. MOUNSEY	CLASSIFICATION	STANDARD
CHECKED		EXTRUDED SECTION.	CVR110
STRESSED	<i>[Signature]</i>		
APPROVED	<i>[Signature]</i>		

STDS M & P SCHWARTZ 5 SEPT 80