


STANDARDS SHEET

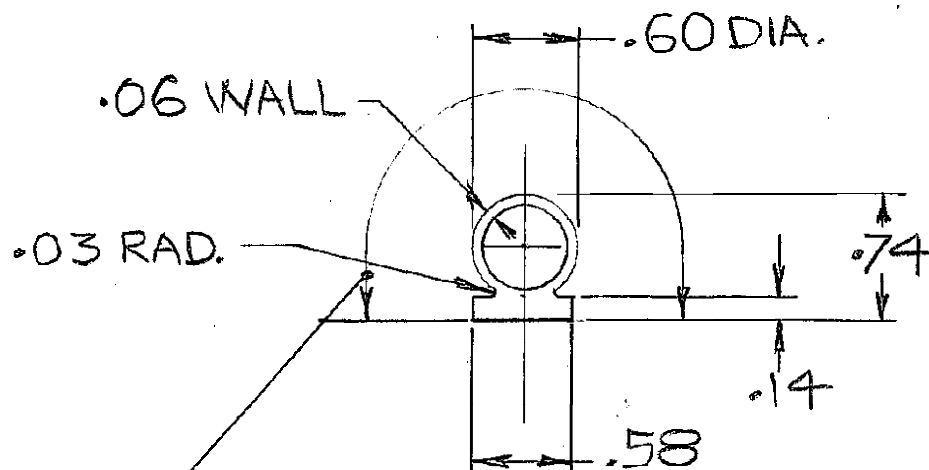

COVER - MOHAWK FABRIC D 1000 100 DENIER
34 FILAMENT DACRON MESH FABRIC
WITH STRIKE THROUGH AS NOTED IN
FINISH NOTE.

MATERIAL: AMS 3302 SILICONE REINFORCED AS NOTED.
COLOUR: GREY FED STD #595, #36492 OR EQUIVALENT.
FINISH: OUTER SURFACE OF SEAL TO HAVE SMOOTH
UNIFORM SILICONE FINISH.

FLAMMABILITY REQUIREMENT: ^(B) ~~DHMS G901 CLASS B~~

(B) FAR 25.853(b-2) And. 25-51

~~METHOD 2~~

MINIMUM LENGTH OR INCREMENT THEREOF: 75 IN.

(A) COVER:-
WAS:- DACRON .007"
SQUARE WEAVE DW BIRS
2 SEPT. 81. YB.

DRAWN	CLASSIFICATION	STANDARD
CHECKED	SEAL-CENTRE BULB	CVR111
STRESSED		
APPROVED		

14 8.87

(B) FLAMMABILITY REQ'D CHANGED TO FAR RULE.
29-9-86 D.C. YB