


STANDARDS SHEET



FULL SIZE

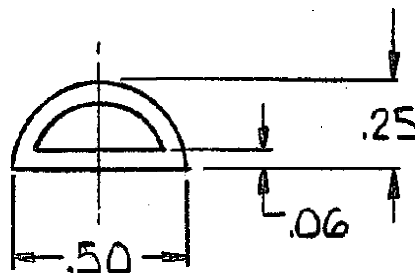

SCALE 2=1

(B) FAR 25.853 (b-2) And. 25-51

MATL: AMS 3302 SILICONE RUBBER.

COLOUR: GREY FED. STD. #595 COLOUR #36492.

FLAMMABILITY REQT. (B) ~~DHMS G 9.01 CLASS B METHOD 2:~~

MINIMUM LENGTH OR INCREMENT THEREOF 22 INCHES.

ENGINEERING APPROVAL IS REQUIRED OF A SAMPLE SPECIMEN PRIOR TO A PRODUCTION RUN.

(A) MATERIAL: -1 SAME AS CVR122 EXCEPT THE AMS 3302 SILICONE RUBBER USED SHALL ALSO MEET THE REQUIREMENTS OF (B) ~~FAR 25.855 (A) AND AMEND 25-51.~~

FAR 25.853 (b-2) And. 25-51 and 45° BURN TEST ONLY OF

FAR 25.855 (a-1) And. 25-51.

DRAWN	CLEMENT	CLASSIFICATION	STANDARD
CHECKED	<i>T. J. JARIK</i>	SEAL	CVR-122
STRESSED	<i>[Signature]</i>		
APPROVED	<i>[Signature]</i>		

STD M&P 108/122 6432

(B) FLAMMABILITY REQUIREMENTS
 OF CVR 122 & 122-1 CHANGED
 29-9-86 D.C. J.S.

(A) -1 ADDED
 27 MAR. 85