


STANDARDS SHEET

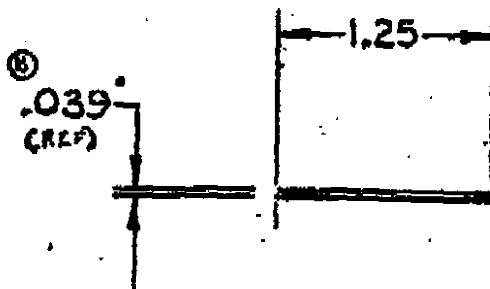

MATERIAL -

* AMS 3302 SILICONE RUBBER, .025" THICK.

COVER -

② FLAMMABILITY REQUIREMENT: PAR 25.853 (b-2) AND 25-51

DACRON .007" SQUARE WEAVE FABRIC
 ① ~~LAIN~~ UP ON A BIAS AND BONDED TO TOP AND BOTTOM SURFACES AND AROUND ① ONE EDGE AS SHOWN, WITH NO STRIKE THROUGH.

COLOUR -

GREY TO FED. STD. 595 NO 36492 OR EQUIVALENT.

MINIMUM LENGTH OR INCREMENT THEREOF - 100 INCHES.
 ENGINEERING APPROVAL IS REQUIRED OF A SAMPLE SPECIMEN PRIOR TO A PRODUCTION RUN.

~~MATERIAL - SAME AS CVR 123 EXCEPT SEAL SHALL MEET THE REQUIREMENTS OF FA 2-25-26 (A) RATING 25-51~~

DRAWN	BRADLEY	CLASSIFICATION	STANDARD
CHECKED	②	SEALING STRIP	CVR 123
STRESSED	KR		
APPROVED	<i>[Signature]</i>		

ORIGINAL MISSING

WAS LAIN UP ON A BIAS.
 2 BOTH EDGES.

⑤ JUNE 82.

⑤ 13 DEC 82

⑤ 13 DEC 82

⑤ 13 DEC 82

⑤ 13 DEC 82

⑤ 13 DEC 82

⑤ 13 DEC 82