
THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE 'INFORMATION') ARE EITHER THE EXCLUSIVE PROPERTY OF BOMBARDIER INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF BOMBARDIER INC. THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AND USE, AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS.

de HAVILLAND

CAGE CODE 71867 CVR STANDARD ONLY THE ITEM(S) LISTED ON THIS DRAWING AND IDENTIFIED BY VENDOR'S NAME(S), ADDRESS(ES) AND PART NUMBER(S) HAVE BEEN APPROVED FOR USE IN DE HAVILLAND AIRCRAFT. A SUBSTITUTE ITEM SHALL NOT BE USED WITHOUT PRIOR APPROVAL BY DE HAVILLAND ENGINEERING STANDARDS

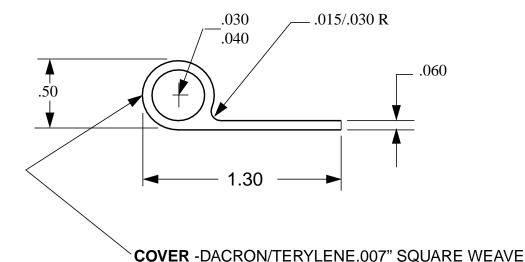

NO STRIKE THROUGH ALLOWED

AROUND PARIMETER.

LAYED UP ON THE BIAS AND BONDED ON

(C)

MATERIAL: AMS 3302 SILICONE RUBBER, SHORE A 45 - 55.

COLOR: GREY - FED STD-595 #36492 OR EQUIVALENT.

MINIMUM LENGTH OR INCREMENT THEREOF: 60.0 INCHES

ENGINEERING APPROVAL IS REQUIRED OF A SAMPLE SPECIMEN PRIOR TO A

PRODUCTION RUN

FOR ORIGINAL SIGNATURES, SEE THE ENGINEERING STANDARDS APPROVAL RECORD

DRAWN	J. PANG	EXTRUDED SEAL	CVR 124
CHECKED	T. MANN		C V IX 124
STRESS	D. TODDI		
APPROVED	T. MANN		SHEET: 1 OF 1

REV:C - 2 JAN 2008

:REV:

REV: A - 19 AUGUST 1982