THE INFORMATION, TECHNICAL DATA AND DESIGNS DISCLOSED IN THIS DOCUMENT (THE "INFORMATION") ARE EITHER THE EXCLUSIVE PROPERTY OF DE HAVILLAND INC., OR ARE SUBJECT TO PROPRIETARY RIGHTS OF OTHERS. THE INFORMATION IS NOT TO BE USED FOR DESIGN OR MANUFACTURE, OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS PRIOR WRITTEN CONSENT OF DE HAVILLAND INC.

de HAVILLAND

CAGE CODE 71867 CVR STANDARD THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

REV:


REV:

REV:

REV:

REV: A - 20 JUN 00

APPROVED: 17AUG 82

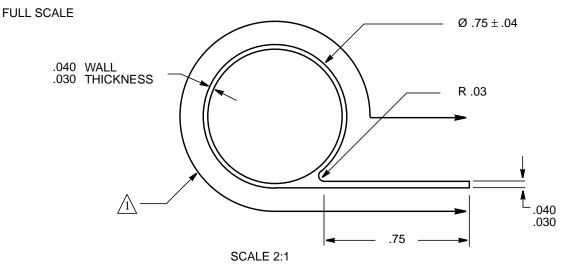

MATERIAL:

A

PART NUMBER	MATERIAL	COLOUR	SPECIFICATION
CVR 127	SILICONE RUBBER	GREY	AMS 3345 OR AMS 3346
CVR 127-1	FLUOROSILICONE RUBBER	RED	MIL-R-25988 TYPE 2 CLASS I GRADE 60

LENGTH: 48 INCH MINIMUM OR INCREMENTS THEREOF.

NOTES: ENGINEERING APPROVAL IS REQUIRED OF A SAMPLE SPECIMEN PRIOR TO A

PRODUCTION RUN.

DACRON/TERYLENE 0.007" SQUARE WEAVE LAYED UP ON THE BIAS AND BONDED ON AROUND THE PERIMITER. NO STRIKE THROUGH ALLOWED.

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	B. McDONALD	
CHECKED	P. LAM	
STRESSED		
APPROVED	S. HAMID	

'P' SECTION, EXTRUDED RUBBER

CVR 127

SHEET: 1