



STANDARDS SHEET



ACTUAL SIZE

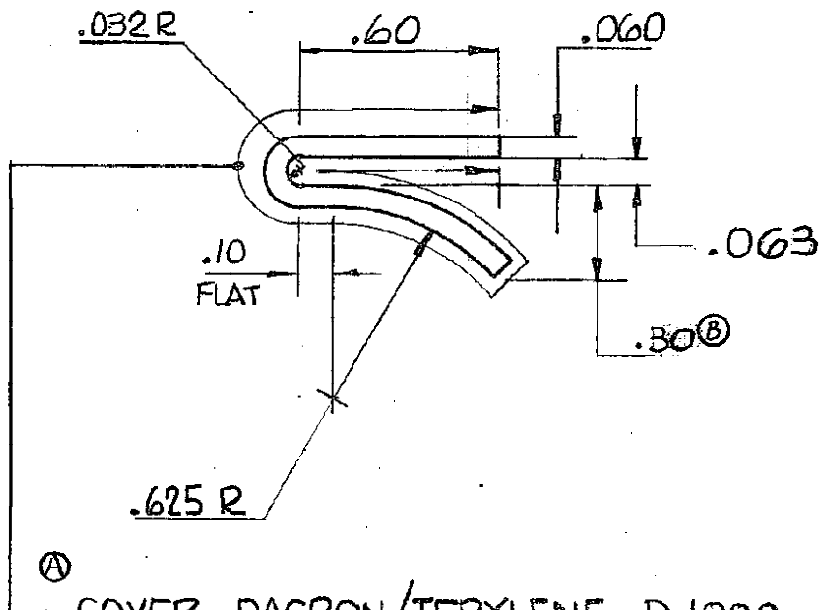


COVER - DACRON/TERYLENE D1000 100/34 FABRIC
BONDED ON AROUND PERIMETER. NO STRIKE
THROUGH ALLOWED

MATL: AMS 3345 SILICONE RUBBER SHORE A 45-55

COLOUR: GREY-FED. STD #595 *36492 OR EQUIVALENT

MIN. LENGTH OR INCREMENTS OF 50.0"

ENGINEERING APPROVAL IS REQ'D PRIOR TO
PRODUCTION RUN.

DRAWN	E.ALEXIS	CLASSIFICATION	STANDARD
CHECKED	TERWISSEN	EXTRUDED SEAL	CVR 131
STRESSED			
APPROVED	TERWISSEN		

SIDE. H&P  25/8/83

(B) DIMENSION
WAS: .150
NOW: .30
D.C. NOV 15/85 

(A) COVER WAS: - DACRON/TERYLENE .007"
SQUARE WEAVE
1/8" MAY 84.2

(A) COVER