

CAGE CODE 71867
CVR STANDARD

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS



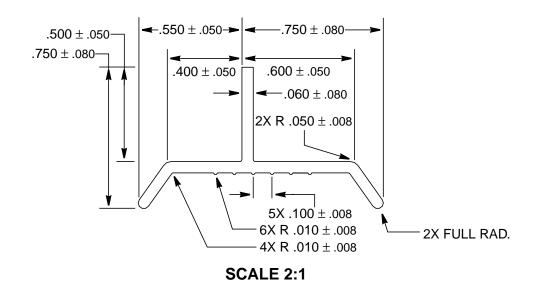

MATERIAL: AMS 3345, SILICONE

FINISH: BLACK, FED-STD-595 #37038

NOTES: 1. ENGINEERING APPROVAL REQUIRED ON A SAMPLE PRIOR TO EACH VENDORS

FIRST PRODUCTION RUN

2. MINIMUM LENGTH 144", OR INCREMENTS THEREOF

3. ALL TOLERANCES PER AMS 2279

4. FLAMMABILITY REQUIREMENTS SHALL BE AS FOLLOWS:

(D) a. CVR132 - F.A.R. 25.853 (b-2) AMEND 25-51

b. CVR132-1 - F.A.R. 25.853 (b-2) AMEND 25-51 and 45° BURN THROUGH TEST ONLY OF F.A.R. 25.855 (a-1) AMEND 25-51

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	
CHECKED	;
STRESSED	
APPROVED	

D NOTE 4a DELETED

FOR SIGNATURES SEE REV. DATED: 16 SEP 86

SEAL, EXTRUSION, T-SECTION

CVR132

SHEET: 1 OF 1

REV