


FULL SCALE

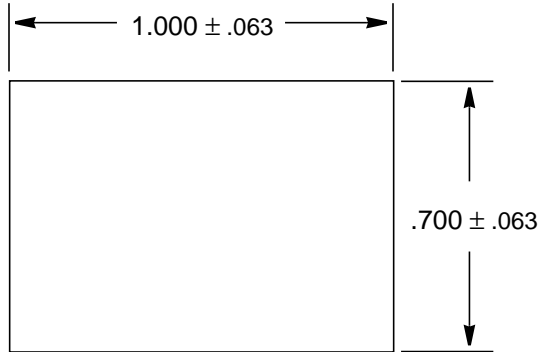

SCALE 2:1

MATERIAL: AMS 3195, CLOSED CELL SILICONE SPONGE, DEAD SOFT

FINISH: WHITE, FED-STD-595 #37886

- NOTES:**
1. ENGINEERING APPROVAL REQUIRED ON A SAMPLE PRIOR TO EACH VENDORS FIRST PRODUCTION RUN
 2. MINIMUM LENGTH 60"
 3. ALL TOLERANCES PER RMA'S (THE RUBBER MANUFACTURERS ASSOCIATIONS INC.) RUBBER HANDBOOK
 4. FLAMMABILITY REQUIREMENTS SHALL BE AS FOLLOWS:
 - ⓓ a. CVR135 - F.A.R. 25.853 (b-2) AMEND 25-51
 - b. CVR135-1 - F.A.R. 25.853 (b-2) AMEND 25-51 and 45° BURN THROUGH TEST ONLY OF F.A.R. 25.855 (a-1) AMEND 25-51

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	FOR SIGNATURES SEE REV. DATED: 16 SEP 86	SEAL, EXTRUSION	CVR 135
CHECKED			SHEET: 1 of 1
STRESSED			
APPROVED			

ⓓ NOTE 4a DELETED

REV:

REV:

REV: D, 2 NOV 98

REV: C, 15 MAY 98

REV: B, 16 SEPT. 86

REV: A, 26 MAR. 85

APPROVED: 3 OCT. 83