




**FULL SCALE**

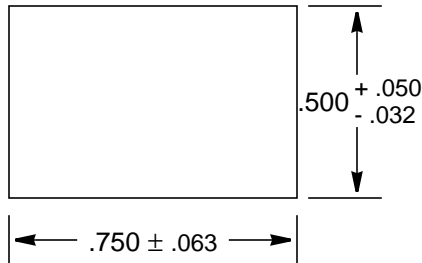

**SCALE 2:1**

**MATERIAL:** AMS 3195, CLOSED CELL SILICONE SPONGE, DEAD SOFT

**COLOUR:** WHITE, FED-STD-595 #37886

- NOTES:**
- ENGINEERING APPROVAL REQUIRED PRIOR TO EACH VENDORS FIRST PRODUCTION RUN
  - THE FLAMMABILITY REQUIREMENT SHALL BE AS FOLLOWS:
    - (D)** ~~a. F.A.R. 25.853 (b-2) AMEND 25-51~~
    - b. CVR144-1 THE REQUIREMENT IS OF F.A.R. 25.853 (b-2) AMEND 25-51 and 45° BURN THROUGH TEST ONLY OF F.A.R. 25.855 (a-1) AMEND 25-51
  - MINIMUM LENGTH 60"
  - ALL TOLERANCES PER RMA'S (THE RUBBER MANUFACTURERS ASSOCIATIONS INC.) RUBBER HANDBOOK.

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN	FOR SIGNATURES SEE REV. DATED: 15 SEP 86	<b>SEAL, EXTRUSION</b>	<b>CVR 144</b>
CHECKED			
STRESSED			SHEET: 1 OF 1
APPROVED			

**(D)** NOTE 2a. DELETED

REV:

REV:

REV: D, 2 NOV 98

REV: C, 15 MAY 98

REV: B, 15 SEPT. 86

REV: A, 2 MAY 85

APPROVED: 12 JUNE 84