## de HAVILLAND

CAGE CODE 71867

CVR STANDARD

THE HOLDER OF THIS DOCUMENT, BY ITS RETENTION AGREES TO HOLD THE INFORMATION IN CONFIDENCE. THESE RESTRICTIONS DO NOT APPLY TO PERSONS HAVING PROPRIETARY RIGHTS IN THE INFORMATION, TO THE EXTENT OF THOSE RIGHTS

REV

REV:


REV:


REV: A, 15 MAY 98

APPROVED: 23 MAY 84



**FULL SCALE** 

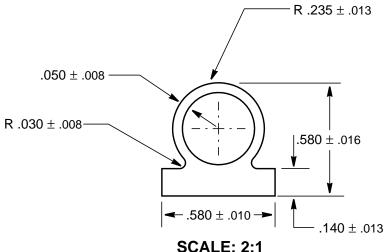



MATERIAL: A BODY - AMS 3302 SILICONE

COVER - MOHAWK D1000, DACRON MESH FABRIC, 100 DENIER, 34 FILAMENT

**COLOUR:** GREY, FED-STD-595 #36492

NOTES: 1. FLAMMABILITY REQUIREMENTS TO MEET F.A.R. 25.853 (b-2) AMEND 25-51.

2. MINIMUM LENGTH 75", OR INCREMENT THEREOF.

3. STRIKE THROUGH TO PRODUCE A SEAL WITH A SMOOTH UNIFORM OUTER SURFACE

4. ALL TOLERANCES PER AMS 2279

SEE ENGINEERING STANDARDS APPROVAL RECORD FOR ORIGINAL SIGNATURES AND CHANGE SUMMARY

DRAWN FOR SIGNATURES SEE ORIGINAL STANDARD DATED: 23 MAY 84

**SEAL - CENTRE BULB** 

**CVR 146** 

SHEET: 1 OF 1