


STANDARDS SHEET

NOTE: FOAM SHALL MEET
FLAMMABILITY REQUIREMENTS
OF ~~FAR 25.855(A-1) AMEND 25-51.~~

Ⓐ FAR 25.853 (b-2) AMD. 25-51 and
45° BURNT THROUGH TEST ONLY OF
FAR 25.855 (A-1) AMD. 25-51.



ACTUAL SIZE

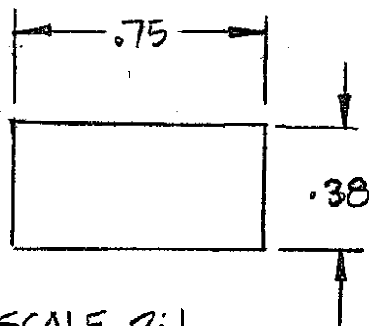

SCALE 2:1


MATERIAL: CLOSED CELL SILICONE SPONGE DEAD SOFT
COLOUR: WHITE (FED STD 595-37886)
SPECIFICATION: AMS 3195
MIN LENGTH: 60"

ENGINEERING APPROVAL IS REQ'D OF A SAMPLE
SPECIMEN PRIOR TO PROD. RUN.

Ⓐ REQUIREMENTS CHANGED

15-9-86

D.C.

DRAWN	S. HANDLEY	CLASSIFICATION	STANDARD
CHECKED		SEAL - FOAM	CVR 150
STRESSED			
APPROVED			
3-10-85			